



NOTE: IF YOUR DOOR HAS BUMPERS YOU WILL NEED TO TAKE THAT SPACING INTO ACCOUNT WHEN PLACING THE STRIKE PLATE. THE .31 DIMENSION NEEDS TO BE HELD FROM THE BACK OF THE DRAWER FRONT.

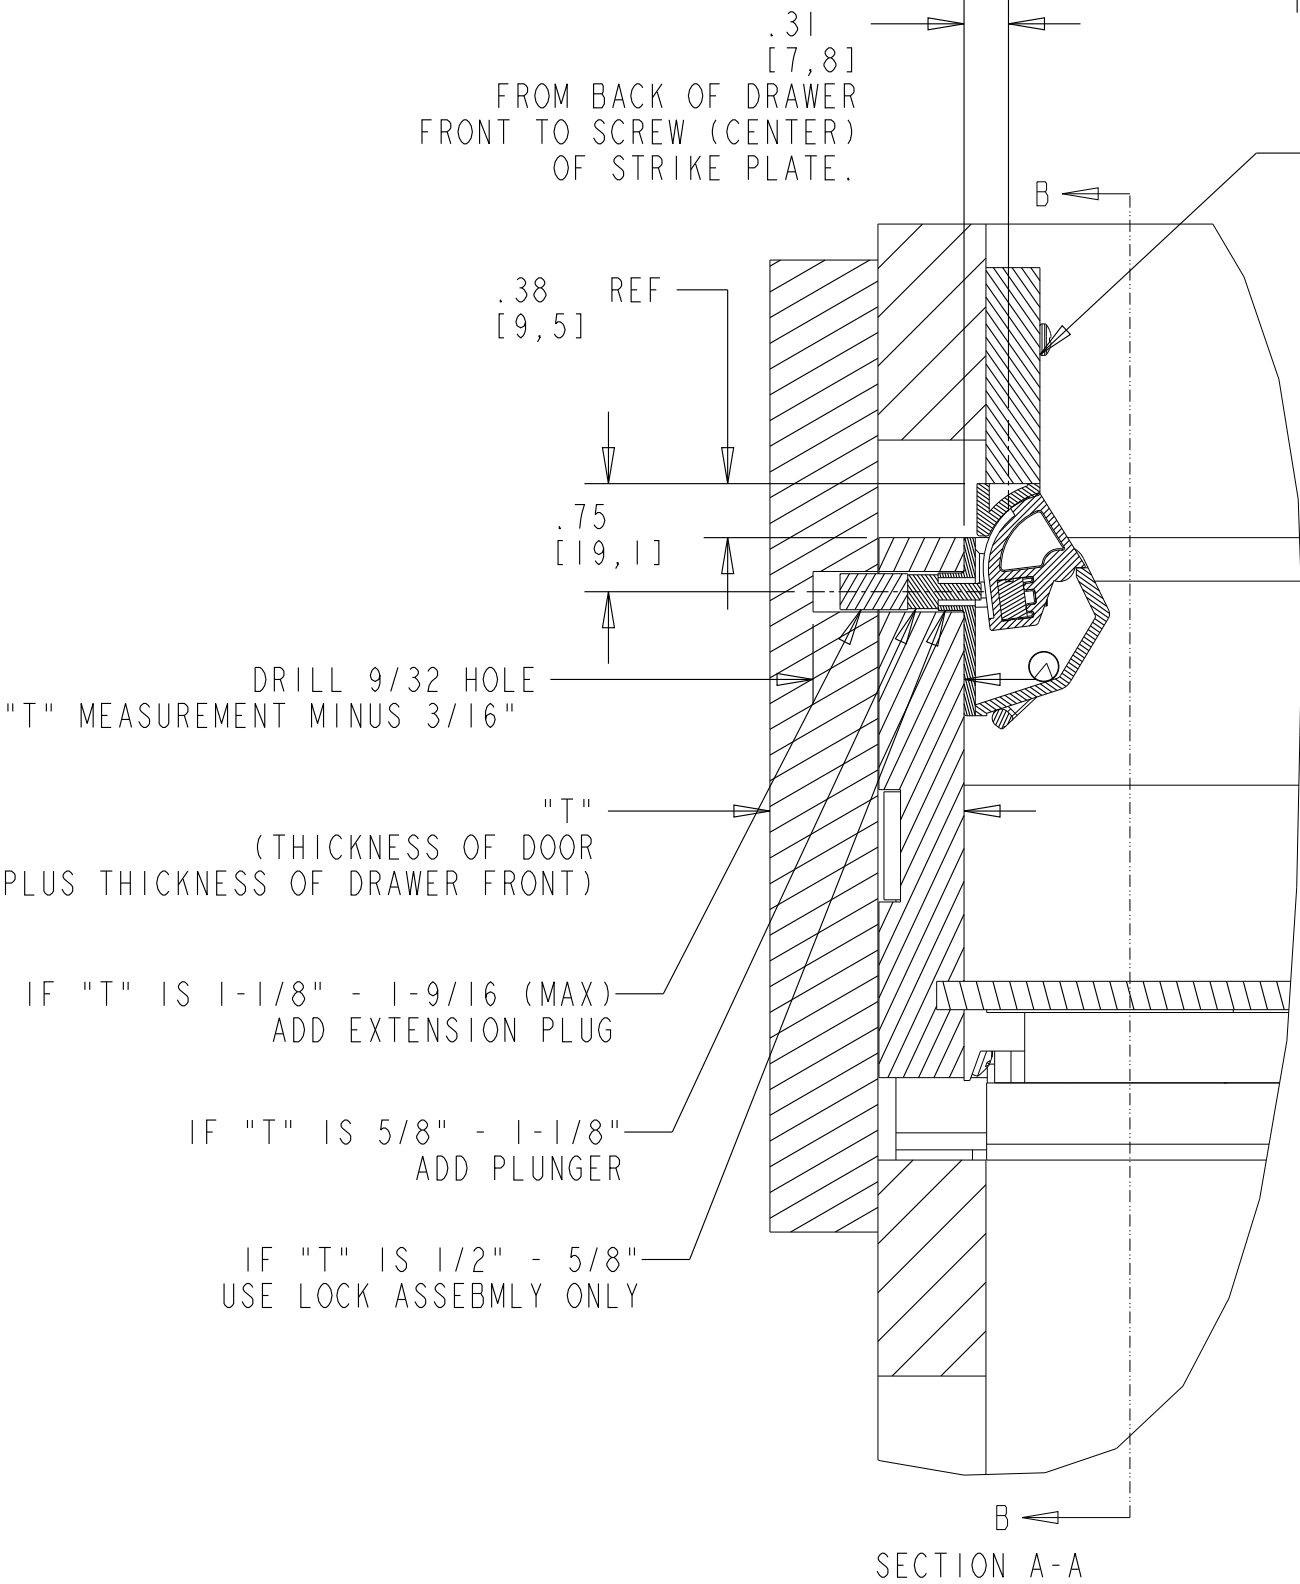

STRIKE PLATE INSTALLATION BLOCK
(NOT PROVIDED)

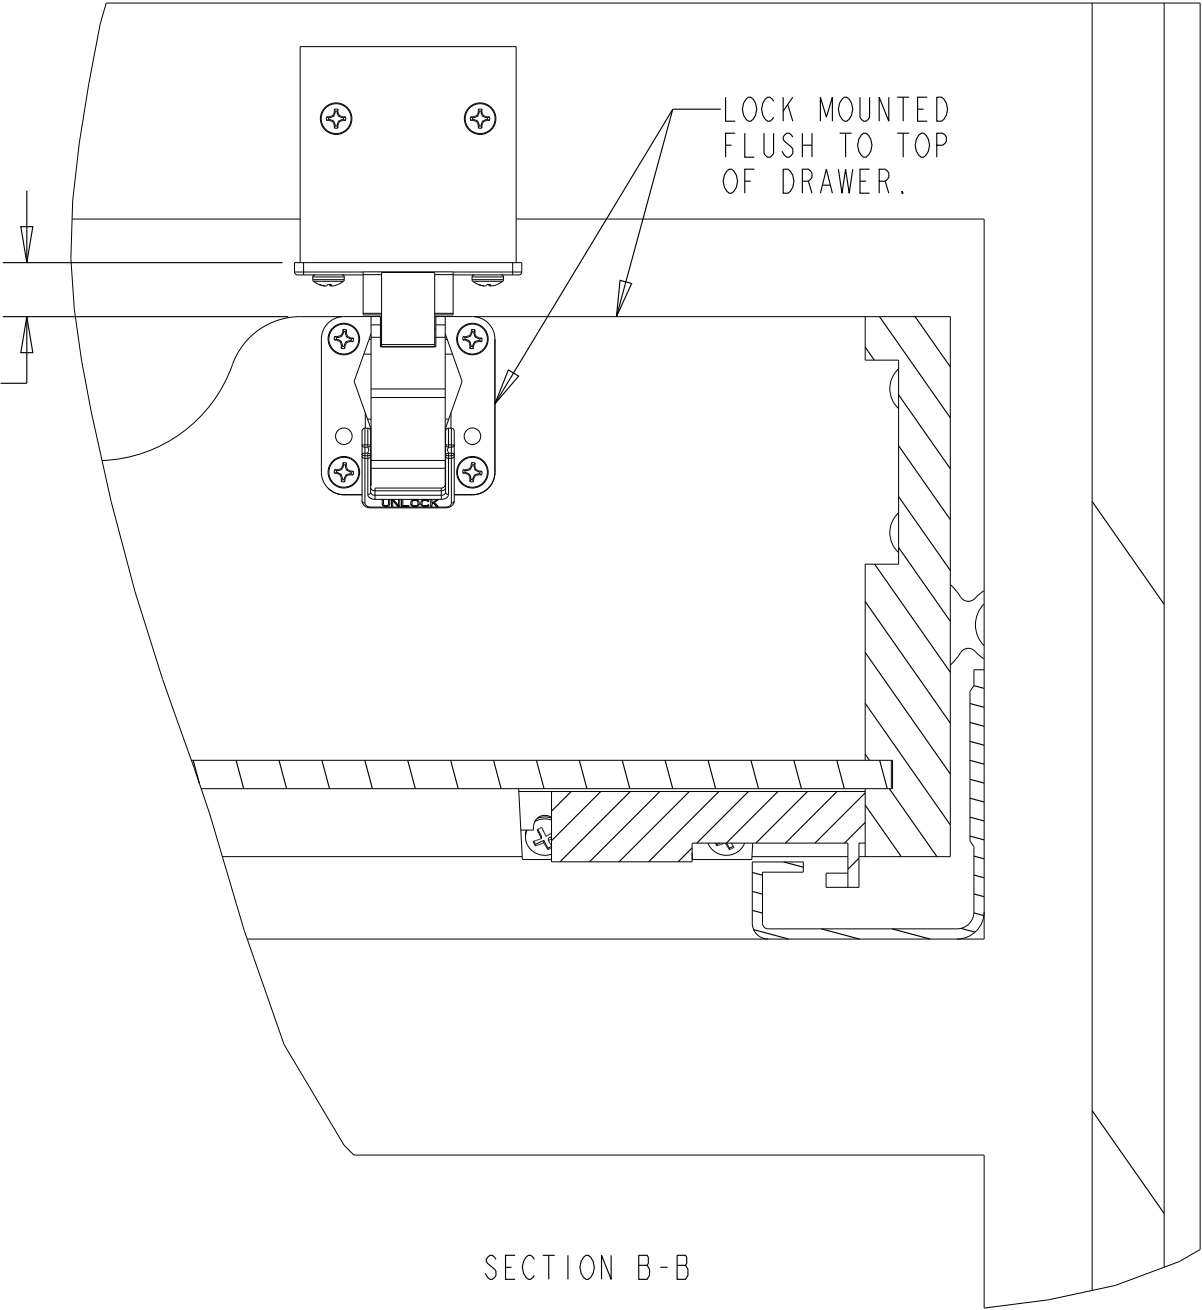


SECTION B-B

CUSTOMER DRAWING

This drawing is the property of Rev-A-Shelf (RAS) and is disclosed in confidence to the extent its subject matter is original to RAS. Any vendor receiving this drawing from RAS shall hold and use this drawing for the sole benefit of RAS and shall not disclose it to, or use or reproduce it for any third party, or perform any act adverse to the interest of RAS with respect to this drawing without the express written permission of RAS. Vendors shall not revise any physical, dimensional or performance characteristic unless authorized by Rev-A-Shelf Engineering.

REV.	DATE	BY	DESCRIPTION OF CHANGE

INCH [MM]	AMERICAN PROJECTION 	DRAWN	BY	DATE	REV-A-SHELF®, INC.	
					SIZE B	REV-A-LOCK DRAWER INATALLATION
TOLERANCES MAT. DEC. ANGLES (WOOD) .XX ±.03 [.8mm] (OTHER) .XX ±.02 [.5mm] (ALL) .XXX ±.005 [.13 mm] FRACTIONS ±1/32 [.8 mm]			MATERIAL	DRAWING NO.	SCALE 0.750	
			FINISH	PART NO.	SHEET OF 1	