

## Technical Data Sheet



Eclectic Products LLC  
Manufacturing Facility  
101 Dixie Mae Drive  
Pineville, Louisiana  
eclecticproducts.com

Customer Service  
1-800-349-4667

Technical Support  
1-800-767-4667

Administration Office  
Eugene, Oregon  
1-800-693-4667

ISO 9001:2015  
Compliant  
Quality Management Systems



### UNITED STATES/MEXICO



Net Wt 6 oz

Net Wt 23 oz

Net Wt 45 oz (not shown)

Gallon

## FAMOWOOD ORIGINAL WOOD FILLER

### PRODUCT DESCRIPTION

First choice of woodworking professionals for more than 70 years! Whether you are masking small or large defects, FAMOWOOD can be used inside or outside and takes stains and paints evenly, making it ideal for any custom project. FAMOWOOD spreads evenly into cracks and holes without shrinking, crumbling or cracking. In addition, FAMOWOOD requires very little sanding to achieve a desired finished look.

### WHERE TO USE / APPLICATIONS

Use to fill cracks or holes in wood. Spread evenly into cracks or holes, let dry and sand smooth to surface repaired. Paint or stain to match wood surface.

### FEATURES AND BENEFITS

**ACTS LIKE REAL WOOD** – Saw, drill, sand, plane and nail

**INTERIOR/EXTERIOR** – Use indoors or outdoors

**WON'T CRACK OR SHRINK** – Spread evenly into cracks and holes without crumbling or cracking

**SUPERIOR STRENGTH** – Hard finish with little or no shrinkage

**QUALITY FINISH** – Takes stains and paints evenly with minimal sanding




### TECHNICAL INFORMATION

#### PROPERTIES

Colors (13):	Alder, Ash, Birch, Cedar, Fir/Pine, Mahogany, Maple, Natural/Tupelo/White Pine, Oak/Teak, Red Oak/Cherry, Walnut, White, White Glaze
VOC:	269 grams/liter
Viscosity:	640,000-460,000 cps
Solvent:	Acetone, Methyl Ethyl Ketone and Petroleum Distillate
Density:	13.9 lbs/gal
Solids:	79% +/- 1.0% (by weight)
Vehicle:	Nitrocellulose Lacquer
Application Temperature:	40 - 80 °F (4 - 27 °C)
Service Temperature:	10 - 150 °F (-12 - 66 °C)
Storage Temperature:	Store between 45 and 85 °F (7 - 29 °C)
Freeze/Thaw Stability:	Yes
Shelf Life:	1 year

### TEST RESULTS: FAMOWOOD vs. COMPETITION

#### APPLIED FORCE NEEDED TO CAUSE WOOD FILLER POP OUTS

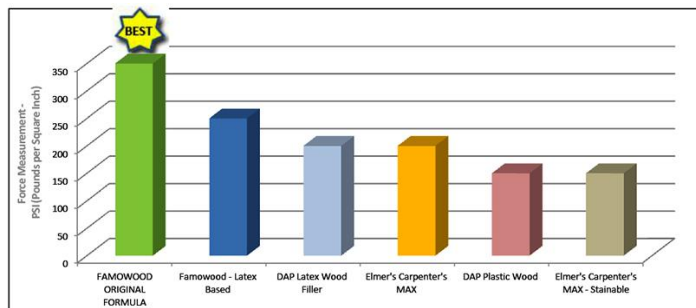


#### BETTER ADHESION = NO POP OUTS!

PSI (pounds per square inch). ASTM D 4541-93. Average adhesion strength in a ¼" deep x 2" diameter defect (Average of 5 samples).

#### PERCENT SHRINKAGE

# FAMOWOOD

## ORIGINAL WOOD FILLER

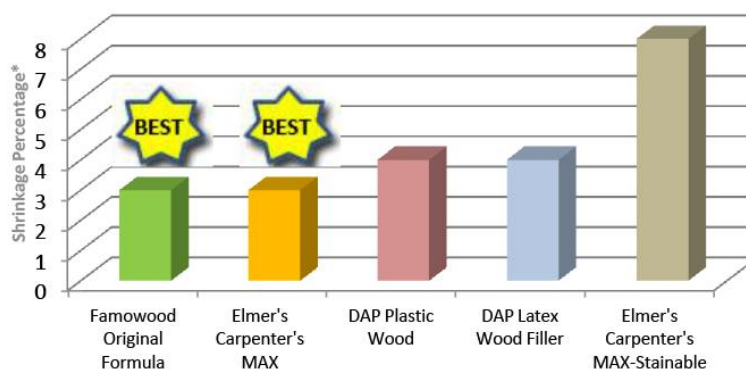

\*Volume was measured on a lab scale using the following formula:  
 $(Initial\ Volume - Final\ Volume) / Initial\ volume \times 100 = Percent\ Shrinkage$

### STAINABILITY

Wood Filler	Stain Quality
FAMOWOOD ORIGINAL FORMULA	Stains Well
FAMOWOOD LATEX BASED	Stains Well
DAP Plastic Wood	Stains Well
Elmer's Carpenter's MAX – Stainable	Stains Well
DAP Latex Wood Filler	Resists Stains
Elmer's Carpenter's MAX	Resists Stains

### DIRECTIONS and APPLICATION NOTES

Test small area before use.

- Step 1 Surface must be clean and dry.
- Step 2 Allow contents to dry thoroughly before sanding (approx. 15 minutes).
- Step 3 Accepts most water-based and oil-based stains.
- NOTE:** TEST STAIN COMPATABILITY BEFORE USE.
- Step 4 For deep repairs, allow 1<sup>st</sup> layer to dry before applying subsequent layers.
- Step 5 Replace lid tightly.
- Step 6 Use lacquer thinner, methyl ethyl ketone, toluene or mineral spirits to restore original consistency or for clean-up.

### HEALTH and SAFETY

Before working with this product, read and become familiar with information concerning hazards, proper use and handling.

To request a Safety Data Sheet, please send an e-mail to [sds@eclecticproducts.com](mailto:sds@eclecticproducts.com).

**⚠WARNING:** This product can expose you to chemicals including wood dust and crystalline silica which are known to the State of California to cause cancer. For more information go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).

---

**FAMOWOOD**  
ORIGINAL WOOD FILLER

---

---

**LIMITED WARRANTY**

---

The product is warranted against any defect in materials or workmanship under normal use for a period of 180 days after the date of purchase. The product is also warranted under any implied warranties provided under applicable state law, including, without limitation, the implied warranty of merchantability and the implied warranty of fitness for a particular purpose, for a period of 180 days after the date of purchase. This warranty covers only the original buyer of the product. For warranty service, the buyer should contact the store where the product was purchased, or write Eclectic Products, LLC., P.O. Box 4450, Pineville LA 71361 or call 800.767.4667. This warranty gives you specific legal rights, and you also have other rights, which vary from state to state.