

# ELite-LED




## Economically Priced LED with Integrated Driver

The ELite-LED is the perfect solution for new installation where lower upfront costs are required. It features an integrated electronic driver and connecting system for easy installation. The ELite-LED uses half the energy of T5 fluorescents with the same brightness and more than twice the lifetime. It is also now available in a dimmable version.


## Product-Features



- 120 Vac LED with integrated electronic driver
- Available in five different sizes: 1' (5 W), 2' (9 W), 3' (12 W), 4' (15 W), 5' (18 W)
- **NEW Feature:** Line Voltage **Dimmable** with compatible LED wall dimmer
- **DLC 4.4 QPL** listed
- Stocked in 3000 K and 4100 K
- Available from 2700 K to 6500 K by special order
- Finish: White housing with white frosted lens
- 50,000 hours usable life
- Good CRI > 80
- Efficacy  $\geq 104$  lm/W
- Fixtures can interconnect with direct connectors or accessory cables
- Optional hardwire adapter box available
- Magnetic mounting clips available
- 277 V option available by special order (non-dimmable)

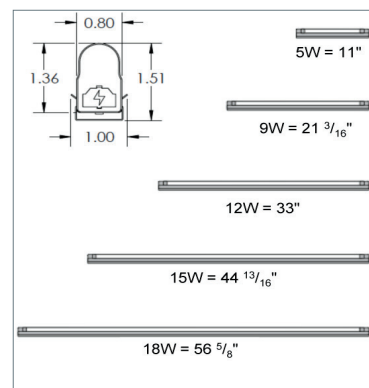

| Fixture   | Watts | Max Interconnected |
|-----------|-------|--------------------|
| EL/LED/12 | 5 W   | 100                |
| EL/LED/22 | 9 W   | 55                 |
| EL/LED/34 | 12 W  | 41                 |
| EL/LED/46 | 15 W  | 33                 |
| EL/LED/59 | 18 W  | 27                 |

| Compatible Dimmers   |
|--|
| Lutron: Diva - DVWCL-153PH<br>Diva - DVELV-303P<br>Skylark - CTCL-153PDH<br>Radio Ra 2 - RRD-6NA<br>Maestro - MRF2-6ND-120 |
| Leviton: Decora - IPL06-10Z<br>Decora - 6615-POW<br>Decora - 6674-10W  |
| Lightolier: Vega - V1000VAU  |
| Cooper: SKYE AL - SAL06P   |
| **Please contact Hera for a complete list of compatible dimmers.   |



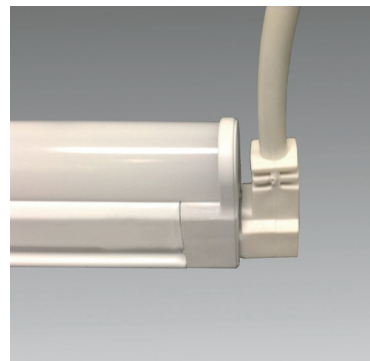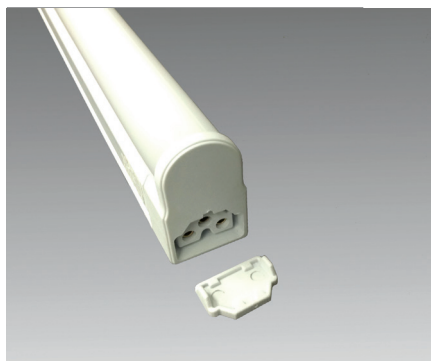

90 degree connector

## What you'll need to buy

### Light Fixtures

| Length | Watt | Lumens | Code No. 3000 K |
|--------|------|--------|-----------------|
| 1'     | 5 W  | 525    | EL/LED/12/WW    |
| 2'     | 9 W  | 945    | EL/LED/22/WW    |
| 3'     | 12 W | 1240   | EL/LED/34/WW    |
| 4'     | 15 W | 1575   | EL/LED/46/WW    |
| 5'     | 18 W | 1890   | EL/LED/59/WW    |

| Length | Watt | Lumens | Code No. 4100 K |
|--------|------|--------|-----------------|
| 1'     | 5 W  | 525    | EL/LED/12/CW    |
| 2'     | 9 W  | 945    | EL/LED/22/CW    |
| 3'     | 12 W | 1240   | EL/LED/34/CW    |
| 4'     | 15 W | 1575   | EL/LED/46/CW    |
| 5'     | 18 W | 1890   | EL/LED/59/CW    |

### Power Cords

|           | Length | Code No.     |
|-----------|--------|--------------|
| With Plug | 36"    | EL/LED/PC36  |
|           | 48"    | EL/LED/PC48  |
|           | 72"    | EL/LED/PC72  |
|           | 96"    | EL/LED/PC96  |
|           | 132"   | EL/LED/PC132 |
|           | 144"   | EL/LED/PC144 |

### Connecting Cables

|                     | Length | Code No.        |
|---------------------|--------|-----------------|
| Straight Connector  | 6"     | EL/LED/CC6      |
|                     | 12"    | EL/LED/CC12     |
|                     | 24"    | EL/LED/CC24     |
|                     | 36"    | EL/LED/CC36     |
|                     | 48"    | EL/LED/CC48     |
|                     | 72"    | EL/LED/CC72     |
| 90 Degree Connector | 96"    | EL/LED/CC96     |
|                     | 144"   | EL/LED/CC144    |
|                     | 6"     | EL/LED/CC6/90   |
|                     | 12"    | EL/LED/CC12/90  |
|                     | 24"    | EL/LED/CC24/90  |
|                     | 36"    | EL/LED/CC36/90  |
|                     | 48"    | EL/LED/CC48/90  |
|                     | 72"    | EL/LED/CC72/90  |
|                     | 96"    | EL/LED/CC96/90  |
|                     | 144"   | EL/LED/CC144/90 |

### Accessories

|                      | Code No.     |
|----------------------|--------------|
| Hardwire Box         | EL/LED/HWB   |
| Hardwire Box, switch | EL/LED/HWB/S |