

# 721DR | 721DW

## SFIC: Deadbolt Door & Drawer Cabinet Locks



For BEST style interchangeable core cylinders



**ANSI/BHMA Grade 1  
E07121 | E07041**  
**Woodwork Institute (WI)  
acknowledged product**

### SPECIFICATIONS

- Retrofits:** Best 3L
- Reversible:** Field reversible between door and drawer functions
- Long bolt:** Extends bolt 3/4" on both ends. Specify -LB option when ordering.
- Testing:** Passed ANSI/BHMA A156.11 Grade 1 performance requirements.
- US Patent Nos:** 4,899,563; 4,920,774
- Body:** Zinc die cast
- Barrel diameter:** 1-1/8"
- Cylinder length:** 1-1/4" or 1-3/8"
- Finish:** US26D (satin chrome), US3 (polished brass), US10B (oil rubbed bronze) or US19 (flat black).  
1-3/8" barrel length available in US26D finish only.

### KEYING INFORMATION

- Cores:** Not included
- Accepts:** Best, Arrow, Falcon, KSP, Schlage SFIC or equivalent small format interchangeable cores
- Compatible electronic cylinders:** Medeco Nexgen XT or VIDEX CyberLock SFIC cylinders.


### INCLUDED ACCESSORIES

- For 1-1/4" barrel length locks:**
  - 725-1 spacer to fit 6 or 7 pin cores
  - 725-PA plastic thumbturn
  - 10-350 (qty 3) plastic spacers
  - 10-054 1/4" plastic bar strike
  - 10-057 .65" plastic bar strike
- For 1-3/8" barrel length locks:**
  - 725-1 spacer to fit 6 or 7 pin cores
  - 725-PA plastic thumbturn
  - 10-054 1/4" plastic bar strike

### OPTIONAL ACCESSORIES

- Extended (long) bolt:** 721-1-LB (for use with 721DR or 721DW)

### HANDING CHART

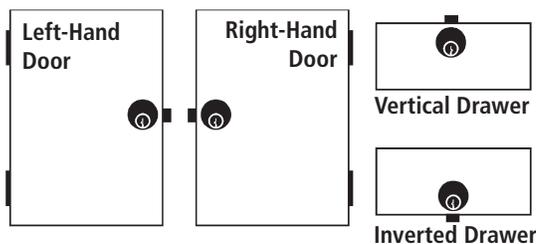

ANSI/BHMA No. E07121

### 721DR

**Function:** Cabinet door lock  
**Standard function:** Key removable in locked or unlocked position. Standard locks are non-handed.  
**Key-retaining function:** Key removable in locked position only. Specify -KR for key-retaining.

Long bolt



ANSI/BHMA No. E07041

### 721DW

**Function:** Drawer lock  
**Standard function:** Key removable in locked or unlocked position. Standard locks are non-handed.  
**Key-retaining function:** Key removable in locked position only. Specify -KR for key-retaining.

Long bolt



### AVAILABLE FINISHES



### INCLUDED ACCESSORIES



**10-350** internal spacers  
For a flush fit on varying material thicknesses



**10-054** bar strike  
1/4" plastic bar strike



**10-057** strike  
.65" plastic bar strike

**WARNING:** This product can expose you to chemicals including chromium, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).



**OLYMPUS  
LOCK**

# 721DR | 721DW

ANSI/BHMA Grade 1  
E07121 | E07041

## SFIC: Deadbolt Door & Drawer Cabinet Locks

**OPTIONAL ACCESSORIES** - See our website for a complete list of optional components.

### Internal Plastic Spacers

- 10-350 1/8" thick plastic spacers
- 10-348 1/4" thick plastic spacers
- 10-349 1/2" thick plastic spacers

### Strikes

- Plastic bar strikes: 10-054, 10-055, 10-057, 10-058. Metal strikes: 10-056 12-1, 12-2, 12-3, 12-4

### Trim Ring

- TR78 trim ring

### 206/207 Series

- 206 Series 6-pin SFIC cylinder
- 207 Series 7-pin SFIC cylinder



BEST compatible interchangeable core cylinders



### AVAILABLE KEYWAYS

A	B	C	D	E	F	G	H	
J	K	L	M	Q	1C	1D	KMT300	

### Through-Bolt Mounting Plate

External metal 1/8" or 1/4" through-bolt plate allows for secure and attractive flush mounting of the cabinet lock face. Available in US3 or US26D finish.

- ETS1-125 through-bolt plate, 1/8" thick
- ETS1-250 through-bolt plate, 1/4" thick

### Through-Bolt Mounting Plate Template

Allows for proper mounting hole placement of through-bolt plate. Can be used as a 1/8" shim spacer. Available in US3 and US26D finish.

- ETST2 through-bolt plate template

ETS1  
Through-bolt plate




ETST1  
Through-bolt plate  
template



U.S. Patent No. D490,686


ETS1-PL  
Through-bolt pull





ETS1-PL  
(requires use of  
ETS1)

## DIMENSIONS | TYPICAL INSTALLATION


### 721DR Cabinet Door Lock



1-3/8" cylinder length available in US26D finish only.

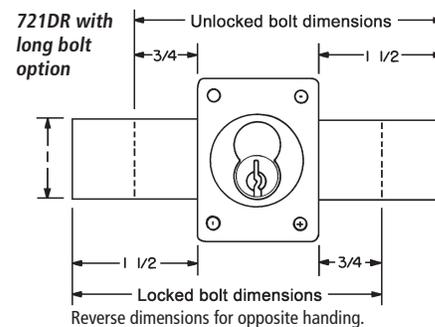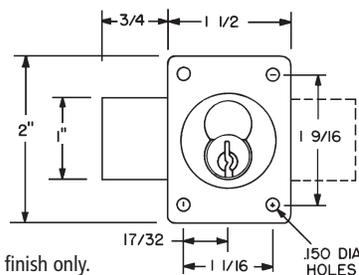


### Typical Installation

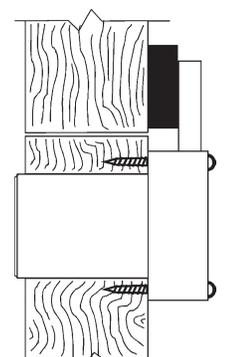

721DR - top view  
721DW - side view

### 721DW Drawer Lock



1-3/8" cylinder length available in US26D finish only.

