



Casters
Wheels
Material Handling
Custom Solutions





Family owned and operated since 1985, DH Casters has dedicated itself to the design, production and distribution of the finest quality casters, wheels, dollies as well as many related specialty hardware for virtually any industry or application.


With manufacturing partners in several regions of the world, DHC has the capability to design products in our domestic R&D and engineering facility. DHC operates showrooms in China and the United States, which has earned us the position as a formidable supplier to all major industries.

Our overseas technical departments work closely with the U.S. based R&D teams to meet clients' specifications. The high standard provided by our engineers allows us to produce quality prototypes for the benefit of the client and manufacturing partners, which enable us to produce quality products.

DHC can design or modify any of our products to meet and exceed your requirements, using sophisticated CAD [Computer Automated Design] drawings with 3D imaging. In addition, with the introduction of re-engineering software, DHC has the ability to fabricate world class products to meet the requirements of any user of casters and wheels, from aerospace to automotive; from medical to material handling. ANSI™ and NSF® available upon request.

Quality control is at the heart of our mission, and the reason for our success. DHC reduces the rare occurrence of product defects by providing independent material and metallurgical testing of products from our manufacturing partners. Our technical expertise and extensive industrial experience allows us to produce the most reliable products. Building an ever increasing presence in the United States, with corporate headquarters located in Ontario, California, DHC offers over 50,000 sq. ft. of management, R&D, customer service and warehousing to satisfy the requirements of our growing customer base.

With our strong manufacturing alliances across the world, and top quality R&D in the U.S., DHC delivers the widest variety of specialized wheels and casters. Customization, quality control and customer service makes DHC a world leader in wheels and casters for the most demanding industries.

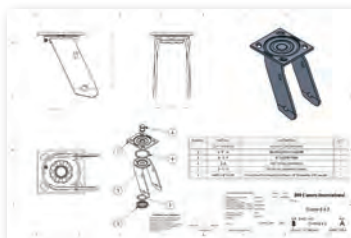

CAD Drawing capabilities



5 Axes CNC machining



Metallurgical testing



Computer Measuring
Machine - CMM



Stress Test machine

Visual Caster Guide	2
-------------------------------	---

CASTERS

Bed Roller Casters	41
Business Machine Casters	42
Drop Forged Heavy Duty Casters	35
Gate Casters	43
General Duty Casters	8
Heavy General Duty Casters.	43
Kingpinless Casters	30
Light Duty Casters	12
Light Furniture Casters	41
Light Institutional Casters	13
Light Medium Duty Casters	16
Light Medium Duty Total Lock Casters	24
Medium Heavy Duty Casters	25
Medium Heavy Duty Total Lock Casters	29
NeverFlat™ Casters	39
Pneumatic Casters	38
Shopping Cart Casters	44
Twin Wheel Casters	40
Waste Bin Casters	72

WHEELS

Aluminum Hub Wheels	48
Balloon Wheels	48
Blue TPR Wheels.	46
DuraPoly™ Polyurethane Wheels.	49
Gray Rubber Wheels	46
Hard Rubber Wheels	45
Hi-Temp. Wheels	52
Metal Hub Wheels	57
Moldon Rubber Wheels	45
NeverFlat™ Wheels	56
Phenolic Wheels	52
Pipe Wheels	53
Plastic Hub Wheels	58
Pneumatic Wheels	55

Poly Hub Wheels	58
Polyolefin Wheels.	51
Polyurethane Cast Iron Wheels	50
Soft Rubber Wheels.	44
Solid Polyurethane Wheels	49
Steel Wheels	53
Thermoplastic Wheels	47
V-Groove Wheels	54
Wheelbarrow Tire	55
Wheelbarrow Tubes.	55

CASTER ACCESSORIES

Ball Bearings	61
Brake Kits	59
Delrin Bearings	61
Expanding Adapters	60
Floor Locks	59
Gate Accessories	54
Metal Bushings	60
Nuts and Bolts	60
Precision Ball Bearings	61
Roller Bearings	61
Yokes - Forks - Rigs	62

SPECIALTY HARDWARE

Axle Caps	63
Connect-A-Cart™	71
Display Sets	75
Dollies	68
Furniture Pads	67
Handtrucks	64
Handtruck Axles	63
Master Movers™	66
Round Stackable Dollies	71
Waste Components	72

Terms and Conditions	76
Credit Application	Back

Visual Caster Guide



2" General Duty
page 8



2-1/2" General Duty
page 9



3" General Duty
page 10



2" Light Duty
page 12



3" Light Institutional
page 13



5" Light Institutional
page 15



3" Light Medium Duty
page 16



4" Light Medium Duty
page 19



4" Light Medium Duty
page 20



5" Light Medium Duty
page 22



5" Light Medium Duty
page 23



Light Medium Total Lock
page 24



4" Medium Heavy Duty
page 25



5" Medium Heavy Duty
page 26



6" Medium Heavy Duty
page 27



Medium H.D. Total Lock
page 29



4" Kingpinless
page 30



5" Kingpinless
page 31



6" Kingpinless
page 32



8" Drop Forged
page 34



Pneumatic
page 38



NeverFlat™
page 39



Twin Wheel
page 40



Light Furniture
page 41



Bed Roller
page 41



Business Machine
page 42



Gate
page 43



Waste Bin
page 72



Shopping Cart
page 44



Quick Change Caster Pad
page 73



Soft Rubber
page 44



Gray Rubber
page 46



Moldon Rubber
page 45



Balloon
page 48



Aluminum Hub
page 48



Thermoplastic Rubber
page 47



Blue TPR
page 46



DuraPoly™ Polyurethane
page 49



Solid Polyurethane
page 49



Poly Cast Iron
page 50



Polyolefin
page 51



Phenolic
page 52



High Temp.
page 52



Pipe Wheels
page 53



V Groove
page 54



Rubber Roller
page 54



Steel
page 53



Pneumatic
page 55



NeverFlat™
page 56



Metal Hub
page 57



Plastic Hub
page 58



Poly Hub
page 58



Floor Locks
page 59



Handtrucks
page 64



Master Mover™
page 66



Furniture Pads
page 67



Dollies
pages 68-71



Connect-A-Cart™
page 71



Waste Components
page 72



Waste Components
page 72-74

Caster Selection Guide






A caster is not just a wheel. A caster is a wheel mounted with an offset pivot, such that the wheel will automatically swivel to align itself to the direction from which it is pushed. A rigid [or fixed] caster is set in one fixed position to only roll forward and back.



Caster












Wheel



- A. Mounting
- B. Yoke-Fork-Rig
- C. Overall Height
- D. Offset
[Distance measured from the center of the kingpin to the center of the axle]
- E. Swivel Radius
[The full radius of the swivel's spin]
- F. Wheel Diameter
- G. Tread Width
- H. Hub Width
- I. Axle Diameter
- J. Overall Plate Size
[Total Width x Total Length of the plate]
- K. Bolt Hole Spacing
- L. Attaching Bolt
[Size of bolt needed to mount caster]

Wheel Material

Moldon Rubber	Featuring a rubber tread for smoother rolling on hard surfaces like asphalt and concrete, primarily for industrial uses. Temp -20° to +160°. Applications: Factory carts, trash dumpsters.	
Hard Rubber	Used for general applications with a slightly higher load rating than soft rubber where non-marking characteristics are not required. Best for soft surfaces. Temp -20° to +160°. Applications: Institutional equipment, store fixtures. Shore A Durometer 95.	
Soft Gray Rubber	A non-marking soft rubber tread wheel used for applications under moderate load ratings. Best for hard surfaces. Temp -20° to +160°. Applications: Display fixtures and indoor uses. Shore A Durometer 80.	
Polyolefin [H.D. Plastic]	Light in weight, very economical and high in impact strength. Non-marking, non-chipping, oil and chemical resistant, non-absorbent and steam-cleanable. Can be used on most surfaces. Temp -40° to +180°. Applications: Office furniture, display fixtures, institutions.	
Polyurethane	Can handle higher load capacities, and is resistant to most chemicals. It is a non-marking material and its durability is unmatched by any rubber tread wheels. Can be used on almost all surfaces. Temp -40° to +180°. Applications: Display fixtures with colored wheels, store equipment.	
Steel	Made of strong steel or semi-steel. Best used on outdoor surfaces. Temp -40° to +500°. Applications: Waste bins and heavy equipment.	
Phenolic	Highly chemical and heat resistant, Phenolic is also floor protective with higher load ratings. Best when used on smooth surfaces. Temp -40° to +250°. Applications: Bakery equipment, heavy equipment, institutions.	
DuraPoly™	A polyurethane tread with a polypropylene [plastic]w hub. It can be used on almost all surfaces. Temp -40° to +180°. Applications: Platform carts, stock carts, and displays.	
High Temp	Best under high temperature applications with moderate load ratings and when used on smooth surfaces. Temp -20° to +525°. Applications: Bakery equipment, oven racks.	

General Duty

90-300 lbs Capacity

Pages 8-11

Wheel Type	Wheel Size			
Soft Rubber	2"	2-1/2"	3"	4"
Hard Rubber	2"	2-1/2"	3"	4"
Polyolefin	2"	2-1/2"	3"	4"
Gray Rubber	2"	2-1/2"	3"	4"
Polyurethane	2"			
Steel			3"	

Light Duty

66-110 lbs Capacity

Page 12

Wheel Type	Wheel Size	
Gray Rubber	2"	3"
Hard Rubber	2"	3"

Light Institutional Duty

100-200 lbs Capacity

Pages 13-15

Wheel Type	Wheel Size		
Hard Rubber	3"	4"	5"
Polyurethane	3"	4"	5"
Gray TPR	3"	4"	5"
Polyolefin	3"	4"	5"

Light Medium Duty

220-320 lbs Capacity

Pages 16-24

Wheel Type	Wheel Size			
Blue TPR	3"	3-1/2"	4"	5"
Hard Rubber	3"	3-1/2"	4"	5"
Polyolefin	3"		4"	5"
Gray TPR	3"	3-1/2"	4"	5"
Polyurethane	3"	3-1/2"	4"	5"
Phenolic			4"	
High Temp Phenolic			4"	
DuraPoly™ Red	3"	3-1/2"	4"	5"
DuraPoly™ Burgundy	3"	3-1/2"	4"	5"

Medium Heavy Duty

350-1100 lbs Capacity

Pages 25-29

Wheel Type	Wheel Size			
Polyolefin	4"	5"	6"	8"
Moldon Rubber	4"	5"	6"	8"
Phenolic	4"	5"	6"	8"
DuraPoly™	4"	5"	6"	8"
Poly / Cast Iron	4"	5"	6"	8"
Steel	4"	5"	6"	8"
Gray TPR	4"	5"	6"	8"

Kingpinless

350-1400 lbs Capacity

Pages 30-33

Wheel Type	Wheel Size			
Moldon Rubber	4"	5"	6"	8"
Steel	4"	5"	6"	8"
Polyolefin	4"	5"	6"	8"
Gray TPR	4"	5"	6"	8"
Poly / Cast Iron	4"	5"	6"	8"
Phenolic	4"	5"	6"	8"
DuraPoly™	4"	5"	6"	8"

Drop Forged Heavy Duty

450-3200 lbs Capacity

Pages 34-37

Wheel Type	Wheel Size			
Moldon Rubber	6"	8"		
Steel	6"	8"	10"	12"
Poly / Cast Iron	6"	8"	10"	12"
Phenolic	6"	8"	10"	12"

Mounting Types



Standard Top Plate
Swivel
General - Light



Slotted Hole Spacing
Rigid
Lt. Med - Heavy



Slotted Hole Spacing
Swivel
Lt. Med - Heavy



Threaded Stem



Stem & Socket



Grip Ring Stem



Expanding Stem



Stemless

2" General Duty Casters



90-125 lbs Capacity

General duty casters are the little work horses of material handling. Single ball bearing raceways, zinc plated finish and simple top plate mountings make them easy and inexpensive. Most swivel models available with side-lock wheel brake.

C-GD Series



C-GD20MRSB



C-GD20RS



C-GD20RR

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
2"	15/16"	Rubber	90	RIGID	2-7/16"	C-GD20RR
2"	15/16"	Rubber	90	1-3/4"	2-7/16"	C-GD20RS
2"	15/16"	Rubber w/brake	90	1-3/4"	2-7/16"	C-GD20RSB
2"	15/16"	Hard Rubber	125	RIGID	2-7/16"	C-GD20HRR
2"	15/16"	Hard Rubber	125	1-3/4"	2-7/16"	C-GD20HRS
2"	15/16"	Hard Rubber w/brake	125	1-3/4"	2-7/16"	C-GD20HRSB
2"	15/16"	Plastic •	125	RIGID	2-7/16"	C-GD20PR
2"	15/16"	Plastic •	125	1-3/4"	2-7/16"	C-GD20PS
2"	15/16"	Plastic w/brake •	125	1-3/4"	2-7/16"	C-GD20PSB
2"	15/16"	Non-Marking Gray Rubber •	90	RIGID	2-7/16"	C-GD20MRR
2"	15/16"	Non-Marking Gray Rubber •	90	1-3/4"	2-7/16"	C-GD20MRS
2"	15/16"	Non-Marking Gray Rubber w/brake •	90	1-3/4"	2-7/16"	C-GD20MRSB
2"	15/16"	Polyurethane •	125	RIGID	2-7/16"	C-GD20PUR
2"	15/16"	Polyurethane •	125	1-3/4"	2-7/16"	C-GD20PUS
2"	15/16"	Polyurethane w/brake •	125	1-3/4"	2-7/16"	C-GD20PUSB

• Non-Marking Wheels

Applications:

- Store fixtures
- Office equipment
- Light industrial equipment

Mounting Specifications			
Type	Plate Size	Hole Spacing	Attaching Bolt
Swivel	1-7/8" x 2-9/16"	15/16" x 2-1/8"	1/4"
Rigid	1-1/2" x 2-21/32"	15/16" x 2-1/8"	1/4"

General duty casters are the little work horses of material handling. Single ball bearing raceways, zinc plated finish and simple top plate mountings make them simple and inexpensive. Most swivel models available with side-lock wheel brake.

100-200 lbs Capacity

C-GD Series

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
2-1/2"	1-1/8"	Rubber	100	RIGID	3-1/4"	C-GD25RR
2-1/2"	1-1/8"	Rubber	100	2-3/8"	3-1/4"	C-GD25RS
2-1/2"	1-1/8"	Rubber w/brake	100	2-3/8"	3-1/4"	C-GD25RSB
2-1/2"	1-1/8"	Hard Rubber	200	RIGID	3-1/4"	C-GD25HRR
2-1/2"	1-1/8"	Hard Rubber	200	2-3/8"	3-1/4"	C-GD25HRS
2-1/2"	1-1/8"	Hard Rubber w/brake	200	2-3/8"	3-1/4"	C-GD25HRSB
2-1/2"	1-1/8"	Plastic •	175	RIGID	3-1/4"	C-GD25PR
2-1/2"	1-1/8"	Plastic •	175	2-3/8"	3-1/4"	C-GD25PS
2-1/2"	1-1/8"	Plastic w/brake •	175	2-3/8"	3-1/4"	C-GD25PSB
2-1/2"	1-1/8"	Non-Marking Gray Rubber •	100	RIGID	3-1/4"	C-GD25MRR
2-1/2"	1-1/8"	Non-Marking Gray Rubber •	100	2-3/8"	3-1/4"	C-GD25MRS
2-1/2"	1-1/8"	Non-Marking Gray Rubber w/brake •	100	2-3/8"	3-1/4"	C-GD25MRSB

• Non-Marking Wheels



C-GD25MRS



C-GD25HRR



C-GD25HRSB

- Applications:
- Store fixtures
 - Office equipment
 - Light industrial equipment

Mounting Specifications			
Type	Plate Size	Hole Spacing	Attaching Bolt
Swivel	2-3/4" x 3-27/32"	1-3/4" x 3"	5/16"
Rigid	2-1/4" x 4-7/16"	1-1/16" x 3-1/2"	5/16"

3" General Duty Casters



125-250 lbs Capacity

General duty casters are the little work horses of material handling. Single ball bearing raceways, zinc plated finish and simple top plate mountings make them simple and inexpensive. Most swivel models available with side-lock wheel brake.

C-GD Series



C-GD30PS



C-GD30HRSB



C-GD30SS

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
3"	1-1/4"	Rubber	125	RIGID	3-13/16"	C-GD30RR
3"	1-1/4"	Rubber	125	2-7/16"	3-13/16"	C-GD30RS
3"	1-1/4"	Rubber w/brake	125	2-7/16"	3-13/16"	C-GD30RSB
3"	1-1/4"	Hard Rubber	220	RIGID	3-13/16"	C-GD30HRR
3"	1-1/4"	Hard Rubber	220	2-7/16"	3-13/16"	C-GD30HRS
3"	1-1/4"	Hard Rubber w/brake	220	2-7/16"	3-13/16"	C-GD30HRSB
3"	1-1/4"	Plastic •	220	RIGID	3-13/16"	C-GD30PR
3"	1-1/4"	Plastic •	220	2-7/16"	3-13/16"	C-GD30PS
3"	1-1/4"	Plastic w/brake •	220	2-7/16"	3-13/16"	C-GD30PSB
3"	1-1/4"	Non-Marking Gray Rubber •	125	RIGID	3-13/16"	C-GD30MRR
3"	1-1/4"	Non-Marking Gray Rubber •	125	2-7/16"	3-13/16"	C-GD30MRS
3"	1-1/4"	Non-Marking Gray Rubber w/brake •	125	2-7/16"	3-13/16"	C-GD30MRSB
3"	1-1/4"	Steel	250	RIGID	3-13/16"	C-GD30SR
3"	1-1/4"	Steel	250	2-7/16"	3-13/16"	C-GD30SS

• Non-Marking Wheels

Applications:

- Store fixtures
- Office furniture
- Light industrial equipment
- Bread racks
- Mover's dollies
- Shop equipment

Mounting Specifications			
Type	Plate Size	Hole Spacing	Attaching Bolt
Swivel	3-1/8" x 4-1/8"	2-3/8" x 3-7/16"	5/16"
Rigid	2-1/2" x 4-7/8"	1-3/16" x 4"	5/16"

General duty casters are the little work horses of material handling. Single ball bearing raceways, zinc plated finish and simple top plate mountings make them simple and inexpensive. Most swivel models available with side-lock wheel brake.

200-300 lbs Capacity

C-GD Series

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
4"	1-1/4"	Rubber	200	RIGID	5"	C-GD40RR
4"	1-1/4"	Rubber	200	3-1/4"	5"	C-GD40RS
4"	1-1/4"	Rubber w/brake	200	3-1/4"	5"	C-GD40RSB
4"	1-1/4"	Hard Rubber	300	RIGID	5"	C-GD40HRR
4"	1-1/4"	Hard Rubber	300	3-1/4"	5"	C-GD40HRS
4"	1-1/4"	Hard Rubber w/brake	300	3-1/4"	5"	C-GD40HRSB
4"	1-1/4"	Plastic •	225	RIGID	5"	C-GD40PR
4"	1-1/4"	Plastic •	225	3-1/4"	5"	C-GD40PS
4"	1-1/4"	Plastic w/brake •	225	3-1/4"	5"	C-GD40PSB
4"	1-1/4"	Non-Marking Gray Rubber •	200	RIGID	5"	C-GD40MRR
4"	1-1/4"	Non-Marking Gray Rubber •	200	3-1/4"	5"	C-GD40MRS
4"	1-1/4"	Non-Marking Gray Rubber w/brake •	200	3-1/4"	5"	C-GD40MRSB

• Non-Marking Wheels



C-GD40PS



C-GD40PR



C-GD40MRSB

Mounting Specifications			
Type	Plate Size	Hole Spacing	Attaching Bolt
Swivel	4" x 5-1/8"	3" x 4"	3/8"
Rigid	2-3/4" x 6"	1-3/4" x 5"	3/8"

- Applications:
- Store fixtures
 - Office equipment
 - Light industrial equipment

2" & 3" Light Duty Casters



66-110 lbs Capacity

These are small yet efficient casters that move cleanly and stay out of the way. Great for light duty equipment that needs to be in motion frequently but doesn't require a lot of upkeep.

Zinc plated for corrosion resistance, riveted axle, and a double ball bearing swivel. Most models are available with brake.

C-L Series



C-L20P2RS



C-L20S1RS



C-L20T1MSB



C-L30GRRS

Applications:

- Office equipment
- Light medical stands & carts
- Chairs and stools
- Store fixtures

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
2"	13/16"	Gray Rubber •	66	1-13/16"	2-5/8"	C-L20 ** MS
2"	13/16"	Gray Rubber w/brake •	66	1-13/16"	2-5/8"	C-L20 ** MSB
2"	13/16"	Hard Rubber	77	1-13/16"	2-5/8"	C-L20 ** RS
2"	13/16"	Hard Rubber w/brake	77	1-13/16"	2-5/8"	C-L20 ** RSB
3"	13/16"	Gray Rubber •	100	2-3/8"	3-5/8"	C-L30 ** MS
3"	13/16"	Gray Rubber w/brake •	100	2-3/8"	3-5/8"	C-L30 ** MSB
3"	13/16"	Hard Rubber	110	2-3/8"	3-5/8"	C-L30 ** RS
3"	13/16"	Hard Rubber w/brake	110	2-3/8"	3-5/8"	C-L30 ** RSB

• Non-Marking Wheels

Replace ** in part number with appropriate Mounting Code below.

Mounting Specifications				
Code	Plate Size	Hole Spacing	Attaching Bolt	Type
P2	1-1/4" x 2-1/16"	13/16" x 1-9/16"	3/16"	Plate
Code	Stem Size	Note		Type
GR	7/16" x 1-7/16"			Grip Ring
S1	5/16" x 1-1/2"	2" only		Stem & Socket
T1	5/16"-18 x 1"			Threaded
T2	3/8"-16 x 1-1/4"			Threaded
Replace ** in part number with appropriate Mounting Code above.				

These casters are specifically designed for light duty institutional and industrial applications -- smooth rolling and low-maintenance.

Nut and bolt wheel assembly, full double ball swivel raceway and zinc plating for corrosion resistance.

100-150 lbs Capacity

C-LI Series

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
3"	1"	Rubber	100	Rigid	3-3/4"	C-LI30P1RR
3"	1"	Rubber	100	2-5/8"	3-3/4"	C-LI30 ** RS
3"	1"	Rubber w/brake	100	2-5/8"	3-3/4"	C-LI30 ** RSB
3"	1"	Polyurethane •	125	Rigid	3-3/4"	C-LI30P1PUR
3"	1"	Polyurethane •	125	2-5/8"	3-3/4"	C-LI30 ** PUS
3"	1"	Polyurethane w/brake •	125	2-5/8"	3-3/4"	C-LI30 ** PUBS
3"	1"	Gray TPR •	125	Rigid	3-3/4"	C-LI30P1TPR
3"	1"	Gray TPR •	125	2-5/8"	3-3/4"	C-LI30 ** TPS
3"	1"	Gray TPR w/brake •	125	2-5/8"	3-3/4"	C-LI30 ** TPSB
3"	1"	Plastic •	150	Rigid	3-3/4"	C-LI30P1LPR
3"	1"	Plastic •	150	2-5/8"	3-3/4"	C-LI30 ** LPS
3"	1"	Plastic w/brake •	150	2-5/8"	3-3/4"	C-LI30 ** LPSB
3"	1"	Non-Marking Gray Rubber w/brake •	100	2-5/8"	3-3/4"	C-LI30T6MSB



C-LI30P1TPS



C-LI30T1RS



C-LI30T6MSB

• Non-Marking Wheels

Replace ** in part number with appropriate mounting code below.

Mounting Specifications				
Code	Plate Size	Hole Spacing	Attaching Bolt	Type
P1	2-3/8" x 3-3/8"	1-3/4" x 2-15/16"	5/16"	Plate
Code	Stem Size	Note		Type
GR	7/16" x 1-1/2"	swivel only		Grip Ring
T1	1/2"-13 x 1-1/2"	swivel only		Threaded
T4	1/2"-13 x 2-3/4"	swivel only		Threaded
T6	1/2"-13 x 5/8"	C-LI30T6MSB only		Threaded
X2	for 7/8" ID tubing	swivel only		Expanding
X6	for 1-1/2" ID tubing	swivel only		Expanding

Replace ** in part number with appropriate Mounting Code above.

Applications:

- Food service equipment
- Bakery racks
- Medical and lab equipment
- Light industrial and institutional carts

4" Light Institutional Casters



150-175 lbs Capacity

These casters are specifically designed for light duty institutional and industrial applications -- smooth rolling and low-maintenance.

Nut and bolt wheel assembly, full double ball swivel raceway and zinc plating for corrosion resistance.

C-LI Series



C-LI40P1RR



C-LI40T1PUS



C-LI40P1TPR

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
4"	1"	Rubber	150	Rigid	4-3/4"	C-LI40P1RR
4"	1"	Rubber	150	3-1/8"	4-3/4"	C-LI40 ** RS
4"	1"	Rubber w/brake	150	3-1/8"	4-3/4"	C-LI40 ** RSB
4"	1"	Polyurethane •	150	Rigid	4-3/4"	C-LI40P1PUR
4"	1"	Polyurethane •	150	3-1/8"	4-3/4"	C-LI40 ** PUS
4"	1"	Polyurethane w/brake •	150	3-1/8"	4-3/4"	C-LI40 ** PUSB
4"	1"	Gray TPR •	150	Rigid	4-3/4"	C-LI40P1TPR
4"	1"	Gray TPR •	150	3-1/8"	4-3/4"	C-LI40 ** TPS
4"	1"	Gray TPR w/brake •	150	3-1/8"	4-3/4"	C-LI40 ** TPSB
4"	1"	Plastic •	175	Rigid	4-3/4"	C-LI40P1LPR
4"	1"	Plastic •	175	3-1/8"	4-3/4"	C-LI40 ** LPS
4"	1"	Plastic w/brake •	175	3-1/8"	4-3/4"	C-LI40 ** LPSB

• Non-Marking Wheels

Replace ** in part number with appropriate mounting code below.

Applications:

- Food service equipment
- Bakery racks
- Medical and lab equipment
- Light industrial and institutional carts

Mounting Specifications				
Code	Plate Size	Hole Spacing	Attaching Bolt	Type
P1	2-3/8" x 3-3/8"	1-3/4" x 2-15/16"	5/16"	Plate
Code	Stem Size	Note		Type
GR	7/16" x 1-1/2"	swivel only		Grip Ring
T1	1/2"-13 x 1-1/2"	swivel only		Threaded
T4	1/2"-13 x 2-3/4"	swivel only		Threaded
X2	for 7/8" ID tubing	swivel only		Expanding
X6	for 1-1/2" ID tubing	swivel only		Expanding
Replace ** in part number with appropriate Mounting Code above.				

These casters are specifically designed for light duty institutional and industrial applications -- smooth rolling and low-maintenance.

Nut and bolt wheel assembly, full double ball swivel raceway and zinc plating for corrosion resistance.

160-200 lbs Capacity

C-LI Series

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
5"	1"	Rubber	160	Rigid	5-3/4"	C-LI50P1RR
5"	1"	Rubber	160	3-3/4"	5-3/4"	C-LI50 ** RS
5"	1"	Rubber w/brake	160	3-3/4"	5-3/4"	C-LI50 ** RSB
5"	1"	Polyurethane •	160	Rigid	5-3/4"	C-LI50P1PUR
5"	1"	Polyurethane •	160	3-3/4"	5-3/4"	C-LI50 ** PUS
5"	1"	Polyurethane w/brake •	160	3-3/4"	5-3/4"	C-LI50 ** PUSB
5"	1"	Gray TPR •	160	Rigid	5-3/4"	C-LI50P1TPR
5"	1"	Gray TPR •	160	3-3/4"	5-3/4"	C-LI50 ** TPS
5"	1"	Gray TPR w/brake •	160	3-3/4"	5-3/4"	C-LI50 ** TPSB
5"	1"	Plastic •	200	Rigid	5-3/4"	C-LI50P1LPR
5"	1"	Plastic •	200	3-3/4"	5-3/4"	C-LI50 ** LPS
5"	1"	Plastic w/brake •	200	3-3/4"	5-3/4"	C-LI50 ** LPSB

• Non-Marking Wheels

Replace ** in part number with appropriate mounting code below.



C-LI50P1RS



C-LI50P1TPS



C-LI50P1LPSB

Mounting Specifications				
Code	Plate Size	Hole Spacing	Attaching Bolt	Type
P1	2-3/8" x 3-3/8"	1-3/4" x 2-15/16"	5/16"	Plate
Code	Stem Size	Note		Type
GR	7/16" x 1-1/2"	swivel only		Grip Ring
T1	1/2"-13 x 1-1/2"	swivel only		Threaded
T4	1/2"-13 x 2-3/4"	swivel only		Threaded
X2	for 7/8" ID tubing	swivel only		Expanding
X6	for 1-1/2" ID tubing	swivel only		Expanding
Replace ** in part number with appropriate Mounting Code above.				

Applications:

- Food service equipment
- Bakery racks
- Medical and lab equipment
- Light industrial and institutional carts

3" Light Medium Duty Casters



220-300 lbs Capacity

These casters feature full double ball bearing heat-treated raceways, axle and nut wheel assembly, and zinc plating for corrosion resistance.

An excellent product for many industrial and institutional applications, with ease of mobility and multiple choices for mounting and wheel options.

C-LM Series



C-LM3P1TPS



C-LM3P1RSB



C-LM3P1BMR

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
3"	1-1/4"	Blue TPR •	220	RIGID	4-1/4"	C-LM3 ** BMR
3"	1-1/4"	Blue TPR •	220	2-3/4"	4-1/4"	C-LM3 ** BMS
3"	1-1/4"	Blue TPR w/brake •	220	2-3/4"	4-1/4"	C-LM3 ** BMSB
3"	1-1/4"	Heavy Plastic Polyolefin •	300	RIGID	4-1/4"	C-LM3 ** HDPR
3"	1-1/4"	Heavy Plastic Polyolefin •	300	2-3/4"	4-1/4"	C-LM3 ** HDPS
3"	1-1/4"	Heavy Plastic Polyolefin w/brake •	300	2-3/4"	4-1/4"	C-LM3 ** HDPSB
3"	1-1/4"	Gray TPR •	220	RIGID	4-1/4"	C-LM3 ** TPR
3"	1-1/4"	Gray TPR •	220	2-3/4"	4-1/4"	C-LM3 ** TPS
3"	1-1/4"	Gray TPR w/brake •	220	2-3/4"	4-1/4"	C-LM3 ** TPSB
3"	1-1/4"	Rubber	220	RIGID	4-1/4"	C-LM3 ** RR
3"	1-1/4"	Rubber	220	2-3/4"	4-1/4"	C-LM3 ** RS
3"	1-1/4"	Rubber w/brake	220	2-3/4"	4-1/4"	C-LM3 ** RSB

• Non-Marking Wheels

Replace ** in part number with appropriate Mounting Code below.

Applications:

- Shop carts & equipment
- Medical and lab carts
- Food service equipment
- Warehouse carts
- Bread racks
- Automotive equipment
- Moving dollies

Mounting Specifications				
Code	Plate Size	Hole Spacing	Attaching Bolt	Type
P1	2-3/8" x 3-5/8"	1-3/4" x 2-15/16"	5/16"	Plate
P2	3-1/8" x 4-1/8"	2-3/8" x 3-3/8"	3/8"	Plate
P3	3-15/16" x 4-1/2"	2-5/8" x 3-5/8"	3/8"	Plate
Code	Note	Stem Size	Type	
GR	swivel only	7/16" x 1-1/2"	Grip Ring	
T2	swivel only	1/2" - 13 x 1"	Threaded	
T3	swivel only	1/2" - 13 x 1-1/2"	Threaded	
T4	swivel only	1/2" - 13 x 2-3/4"	Threaded	
H1	swivel only	3/8" Hole	Stemless	
X2	swivel only	for 7/8" ID tubing	Expanding	
X6	swivel only	for 1-1/2" ID tubing	Expanding	
Replace ** in part number with appropriate Mounting Code above.				

These casters feature full double ball bearing heat-treated raceways, axle and nut wheel assembly, and zinc plating for corrosion resistance.

An excellent product for many industrial and institutional applications, with ease of mobility and multiple choices for mounting and wheel options.

220-240 lbs Capacity

C-LM Series

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
3"	1-1/4"	Solid Polyurethane Red •	240	RIGID	4-1/4"	C-LM3P1PUR
3"	1-1/4"	Solid Polyurethane Red •	240	2-3/4"	4-1/4"	C-LM3 ** PUS
3"	1-1/4"	Solid Polyurethane Red w/brake •	240	2-3/4"	4-1/4"	C-LM3 ** PUBS
3"	1-1/4"	DuraPoly™ Burgundy •	220	RIGID	4-1/4"	C-LM3 ** DPBR
3"	1-1/4"	DuraPoly™ Burgundy •	220	2-3/4"	4-1/4"	C-LM3 ** DPBS
3"	1-1/4"	DuraPoly™ Burgundy w/brake •	220	2-3/4"	4-1/4"	C-LM3 ** DPBSB
3"	1-1/4"	DuraPoly™ Red •	220	RIGID	4-1/4"	C-LM3 ** DPRR
3"	1-1/4"	DuraPoly™ Red •	220	2-3/4"	4-1/4"	C-LM3 ** DPRS
3"	1-1/4"	DuraPoly™ Red w/brake •	220	2-3/4"	4-1/4"	C-LM3 ** DPRSB

• Non-Marking Wheels


Replace ** in part number with appropriate Mounting Code below.



C-LM3P1PUS



C-LM3P1DPRS



C-LM3P1DPRR

Mounting Specifications				
Code	Plate Size	Hole Spacing	Attaching Bolt	Type
P1	2-3/8" x 3-5/8"	1-3/4" x 2-15/16"	5/16"	Plate
Code	Note	Stem Size		Type
GR	swivel only	7/16" x 1-1/2"		Grip Ring
T2	swivel only	1/2" - 13 x 1"		Threaded
T3	swivel only	1/2" - 13 x 1-1/2"		Threaded
T4	swivel only	1/2" - 13 x 2-3/4"		Threaded
H1	swivel only	3/8" Hole		Stemless
X2	swivel only	for 7/8" ID tubing		Expanding
X6	swivel only	for 1-1/2" ID tubing		Expanding

Replace ** in part number with appropriate Mounting Code above.

Applications:

- Shop carts & equipment
- Medical and lab carts
- Food service equipment
- Warehouse carts
- Bread racks
- Automotive equipment
- Moving dollies

3-1/2" Light Medium Duty Casters



220-260 lbs Capacity

These casters feature full double ball bearing heat-treated raceways, axle and nut wheel assembly, and zinc plating for corrosion resistance.

An excellent product for many industrial and institutional applications, with ease of mobility and multiple choices for mounting and wheel options.

C-LM Series



C-LM35P1BMS



C-LM35P1PUS



C-LM35X2PUS

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
3-1/2"	1-1/4"	Blue TPR •	220	RIGID	4-11/16"	C-LM35 ** BMR
3-1/2"	1-1/4"	Blue TPR •	220	3-1/16"	4-11/16"	C-LM35 ** BMS
3-1/2"	1-1/4"	Blue TPR w/brake •	220	3-1/16"	4-11/16"	C-LM35 ** BMSB
3-1/2"	1-1/4"	Solid Polyurethane Blue •	260	RIGID	4-11/16"	C-LM35 ** PUR
3-1/2"	1-1/4"	Solid Polyurethane Blue •	260	3-1/16"	4-11/16"	C-LM35 ** PUS
3-1/2"	1-1/4"	Solid Polyurethane Blue w/brake •	260	3-1/16"	4-11/16"	C-LM35 ** PUSB
3-1/2"	1-1/4"	Rubber	225	RIGID	4-11/16"	C-LM35 ** RR
3-1/2"	1-1/4"	Rubber	225	3-1/16"	4-11/16"	C-LM35 ** RS
3-1/2"	1-1/4"	Rubber w/brake	225	3-1/16"	4-11/16"	C-LM35 ** RSB
3-1/2"	1-1/4"	Gray TPR •	220	RIGID	4-11/16"	C-LM35 ** TPR
3-1/2"	1-1/4"	Gray TPR •	220	3-1/16"	4-11/16"	C-LM35 ** TPS
3-1/2"	1-1/4"	Gray TPR w/brake •	220	3-1/16"	4-11/16"	C-LM35 ** TPSB

• Non-Marking Wheels

Replace ** in part number with appropriate Mounting Code below.

Applications:

- Shop carts & equipment
- Medical and lab carts
- Food service equipment
- Warehouse carts
- Bread racks
- Automotive & Electrical equipment
- Moving dollies

Mounting Specifications				
Code	Plate Size	Hole Spacing	Attaching Bolt	Type
P1	2-3/8" x 3-5/8"	1-3/4" x 2-15/16"	5/16"	Plate
Code	Note	Stem Size		Type
GR	swivel only	7/16" x 1-1/2"		Grip Ring
T3	swivel only	1/2" - 13 x 1-1/2"		Threaded
T4	swivel only	1/2" - 13 x 2-3/4"		Threaded
H1	swivel only	3/8" Hole		Stemless
X2	swivel only	for 7/8" ID tubing		Expanding
X6	swivel only	for 1-1/2" ID tubing		Expanding
Replace ** in part number with appropriate Mounting Code above.				

4" Light Medium Duty Casters

These casters feature full double ball bearing heat-treated raceways, axle and nut wheel assembly, and zinc plating for corrosion resistance.

An excellent product for many industrial and institutional applications, with ease of mobility and multiple choices for mounting and wheel options.

240-300 lbs Capacity

C-LM Series

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
4"	1-1/4"	Blue TPR •	265	RIGID	5-1/8"	C-LM4 ** BMR
4"	1-1/4"	Blue TPR •	265	3-1/2"	5-1/8"	C-LM4 ** BMS
4"	1-1/4"	Blue TPR w/brake •	265	3-1/2"	5-1/8"	C-LM4 ** BMSB
4"	1-1/4"	DuraPoly™ Red •	240	RIGID	5-1/8"	C-LM4 ** DPRR
4"	1-1/4"	DuraPoly™ Red •	240	3-1/2"	5-1/8"	C-LM4 ** DPRS
4"	1-1/4"	DuraPoly™ Red w/brake •	240	3-1/2"	5-1/8"	C-LM4 ** DPRSB
4"	1-1/4"	DuraPoly™ Burgundy •	240	RIGID	5-1/8"	C-LM4 ** DPBR
4"	1-1/4"	DuraPoly™ Burgundy •	240	3-1/2"	5-1/8"	C-LM4 ** DPBS
4"	1-1/4"	DuraPoly™ Burgundy w/brake •	240	3-1/2"	5-1/8"	C-LM4 ** DPBSB

• Non-Marking Wheels

Replace ** in part number with appropriate Mounting Code below.



C-LM4P1BMS



C-LM4P1DPRS



C-LM4P1DPBS

Mounting Specifications				
Code	Plate Size	Hole Spacing	Attaching Bolt	Type
P1	2-3/8" x 3-5/8"	1-3/4" x 2-15/16"	5/16"	Plate
P2	3-1/8" x 4-1/8"	2-3/8" x 3-3/8"	3/8"	Plate
P3	3-15/16" x 4-1/2"	2-5/8" x 3-5/8"	3/8"	Plate
Code	Note	Stem Size		Type
GR	swivel only	7/16" x 1-1/2"		Grip Ring
T3	swivel only	1/2" - 13 x 1-1/2"		Threaded
T4	swivel only	1/2" - 13 x 2-3/4"		Threaded
H1	swivel only	3/8" Hole		Stemless
X2	swivel only	for 7/8" ID tubing		Expanding
X6	swivel only	for 1-1/2" ID tubing		Expanding
Replace ** in part number with appropriate Mounting Code above.				

Applications:

- Shop carts & equipment
- Medical and lab carts
- Food service equipment
- Warehouse carts
- Bread racks
- Automotive & Electrical equipment
- Moving dollies

4" Light Medium Duty Casters



240-300 lbs Capacity

These casters feature full double ball bearing heat-treated raceways, axle and nut wheel assembly, and zinc plating for corrosion resistance.

An excellent product for many industrial and institutional applications, with ease of mobility and multiple choices for mounting and wheel options.

C-LM Series



C-LM4P1HTS



C-LM4P1TPR



C-LM4P1HTSB

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
4"	1-1/4"	Rubber	265	RIGID	5-1/8"	C-LM4 ** RR
4"	1-1/4"	Rubber	265	3-1/2"	5-1/8"	C-LM4 ** RS
4"	1-1/4"	Rubber w/brake	265	3-1/2"	5-1/8"	C-LM4 ** RSB
4"	1-1/4"	Gray TPR •	240	RIGID	5-1/8"	C-LM4 ** TPR
4"	1-1/4"	Gray TPR •	240	3-1/2"	5-1/8"	C-LM4 ** TPS
4"	1-1/4"	Gray TPR w/brake •	240	3-1/2"	5-1/8"	C-LM4 ** TPSB
4"	1-1/2"	High Temp. Phenolic •	300	RIGID	5-1/8"	C-LM4 ** HTR
4"	1-1/2"	High Temp. Phenolic •	300	3-1/2"	5-1/8"	C-LM4 ** HTS
4"	1-1/2"	High Temp. Phenolic w/brake •	300	3-1/2"	5-1/8"	C-LM4 ** HTSB
4"	1-1/2"	High Temp. Epoxy •	300	RIGID	5-1/8"	C-LM4 ** EPR
4"	1-1/2"	High Temp. Epoxy •	300	3-1/2"	5-1/8"	C-LM4 ** EPS
4"	1-1/2"	High Temp. Epoxy w/brake •	300	3-1/2"	5-1/8"	C-LM4 ** EPSB

• Non-Marking Wheels

Replace ** in part number with appropriate Mounting Code below.

Applications:

- Shop carts & equipment
- Medical and lab carts
- Food service equipment
- Warehouse carts
- Bread racks
- Automotive & Electrical equipment
- Moving dollies

Mounting Specifications				
Code	Plate Size	Hole Spacing	Attaching Bolt	Type
P1	2-3/8" x 3-5/8"	1-3/4" x 2-15/16"	5/16"	Plate
P2	3-1/8" x 4-1/8"	2-3/8" x 3-3/8"	3/8"	Plate
P3	3-15/16" x 4-1/2"	2-5/8" x 3-5/8"	3/8"	Plate
Code	Note	Stem Size	Type	
GR	swivel only	7/16" x 1-1/2"	Grip Ring	
T3	swivel only	1/2" - 13 x 1-1/2"	Threaded	
T4	swivel only	1/2" - 13 x 2-3/4"	Threaded	
H1	swivel only	3/8" Hole	Stemless	
X2	swivel only	for 7/8" ID tubing	Expanding	
X6	swivel only	for 1-1/2" ID tubing	Expanding	
Replace ** in part number with appropriate Mounting Code above.				

These casters feature full double ball bearing heat-treated raceways, axle and nut wheel assembly, and zinc plating for corrosion resistance.

An excellent product for many industrial and institutional applications, with ease of mobility and multiple choices for mounting and wheel options.

275-300 lbs Capacity

C-LM Series

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
4"	1-1/4"	Heavy Plastic Polyolefin •	300	RIGID	5-1/8"	C-LM4 ** HDPR
4"	1-1/4"	Heavy Plastic Polyolefin •	300	3-1/2"	5-1/8"	C-LM4 ** HDPS
4"	1-1/4"	Heavy Plastic Polyolefin w/brake •	300	3-1/2"	5-1/8"	C-LM4 ** HDPSB
4"	1-1/4"	Phenolic •	300	RIGID	5-1/8"	C-LM4 ** PNR
4"	1-1/4"	Phenolic •	300	3-1/2"	5-1/8"	C-LM4 ** PNS
4"	1-1/4"	Phenolic w/brake •	300	3-1/2"	5-1/8"	C-LM4 ** PNSB
4"	1-1/4"	Solid Polyurethane Blue •	275	RIGID	5-1/8"	C-LM4 ** PUR
4"	1-1/4"	Solid Polyurethane Blue •	275	3-1/2"	5-1/8"	C-LM4 ** PUS
4"	1-1/4"	Solid Polyurethane Blue w/brake •	275	3-1/2"	5-1/8"	C-LM4 ** PUSB

• Non-Marking Wheels

Replace ** in part number with appropriate Mounting Code below.



C-LM4P1PUS



C-LM4P1PUSB



C-LM4P1PNR

Mounting Specifications				
Code	Plate Size	Hole Spacing	Attaching Bolt	Type
P1	2-3/8" x 3-5/8"	1-3/4" x 2-15/16"	5/16"	Plate
P2	3-1/8" x 4-1/8"	2-3/8" x 3-3/8"	3/8"	Plate
P3	3-15/16" x 4-1/2"	2-5/8" x 3-5/8"	3/8"	Plate
Code	Note	Stem Size	Type	
GR	swivel only	7/16" x 1-1/2"	Grip Ring	
T3	swivel only	1/2" - 13 x 1-1/2"	Threaded	
T4	swivel only	1/2" - 13 x 2-3/4"	Threaded	
H1	swivel only	3/8" Hole	Stemless	
X2	swivel only	for 7/8" ID tubing	Expanding	
X6	swivel only	for 1-1/2" ID tubing	Expanding	
Replace ** in part number with appropriate Mounting Code above.				

Applications:

- Shop carts & equipment
- Medical and lab carts
- Food service equipment
- Warehouse carts
- Bread racks
- Automotive & Electrical equipment
- Moving dollies

5" Light Medium Duty Casters



240-320 lbs Capacity

These casters feature full double ball bearing heat-treated raceways, axle and nut wheel assembly, and zinc plating for corrosion resistance.

An excellent product for many industrial and institutional applications, with ease of mobility and multiple choices for mounting and wheel options.

C-LM Series



C-LM5P1BMSB



C-LM5P1DPRR

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
5"	1-1/4"	Heavy Plastic Polyolefin •	320	RIGID	6-1/8"	C-LM5 ** HDPR
5"	1-1/4"	Heavy Plastic Polyolefin •	320	4"	6-1/8"	C-LM5 ** HDPS
5"	1-1/4"	Heavy Plastic Polyolefin w/brake •	320	4"	6-1/8"	C-LM5 ** HDPSB
5"	1-1/4"	Blue TPR •	240	RIGID	6-1/8"	C-LM5 ** BMR
5"	1-1/4"	Blue TPR •	240	4"	6-1/8"	C-LM5 ** BMS
5"	1-1/4"	Blue TPR w/brake •	240	4"	6-1/8"	C-LM5 ** BMSB
5"	1-1/4"	DuraPoly™ Burgundy •	240	RIGID	6-1/8"	C-LM5 ** DPBR
5"	1-1/4"	DuraPoly™ Burgundy •	240	4"	6-1/8"	C-LM5 ** DPBS
5"	1-1/4"	DuraPoly™ Burgundy w/brake •	240	4"	6-1/8"	C-LM5 ** DPBSB
5"	1-1/4"	DuraPoly™ Red •	240	RIGID	6-1/8"	C-LM5 ** DPRR
5"	1-1/4"	DuraPoly™ Red •	240	4"	6-1/8"	C-LM5 ** DPRS
5"	1-1/4"	DuraPoly™ Red w/brake •	240	4"	6-1/8"	C-LM5 ** DPRSB

• Non-Marking Wheels

Replace ** in part number with appropriate Mounting Code below.

Applications:

- Shop carts & equipment
- Medical and lab carts
- Food service equipment
- Warehouse carts
- Bread racks
- Automotive & Electrical equipment
- Moving dollies

Mounting Specifications				
Code	Plate Size	Hole Spacing	Attaching Bolt	Type
P1	2-3/8" x 3-5/8"	1-3/4" x 2-15/16"	5/16"	Plate
P2	3-1/8" x 4-1/8"	2-3/8" x 3-3/8"	3/8"	Plate
P3	3-15/16" x 4-1/2"	2-5/8" x 3-5/8"	3/8"	Plate
Code	Note	Stem Size	Type	
GR	swivel only	7/16" x 1-1/2"	Grip Ring	
T3	swivel only	1/2" - 13 x 1-1/2"	Threaded	
T4	swivel only	1/2" - 13 x 2-3/4"	Threaded	
H1	swivel only	3/8" Hole	Stemless	
X2	swivel only	for 7/8" ID tubing	Expanding	
X6	swivel only	for 1-1/2" ID tubing	Expanding	
Replace ** in part number with appropriate Mounting Code above.				

These casters feature full double ball bearing heat-treated raceways, axle and nut wheel assembly, and zinc plating for corrosion resistance.

An excellent product for many industrial and institutional applications, with ease of mobility and multiple choices for mounting and wheel options.

240-300 lbs Capacity

C-LM Series

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
5"	1-1/4"	Polyurethane •	300	RIGID	6-1/8"	C-LM5 ** PUR
5"	1-1/4"	Polyurethane •	300	4"	6-1/8"	C-LM5 ** PUS
5"	1-1/4"	Polyurethane w/brake •	300	4"	6-1/8"	C-LM5 ** PUBS
5"	1-1/4"	Rubber	300	RIGID	6-1/8"	C-LM5 ** RR
5"	1-1/4"	Rubber	300	4"	6-1/8"	C-LM5 ** RS
5"	1-1/4"	Rubber w/brake	300	4"	6-1/8"	C-LM5 ** RSB
5"	1-1/4"	Gray TPR •	240	RIGID	6-1/8"	C-LM5 ** TPR
5"	1-1/4"	Gray TPR •	240	4"	6-1/8"	C-LM5 ** TPS
5"	1-1/4"	Gray TPR w/brake •	240	4"	6-1/8"	C-LM5 ** TPSB

• Non-Marking Wheels

Replace ** in part number with appropriate Mounting Code below.



C-LM5P1PUS



C-LM5P1RSB



C-LM5P1TPR

Mounting Specifications				
Code	Plate Size	Hole Spacing	Attaching Bolt	Type
P1	2-3/8" x 3-5/8"	1-3/4" x 2-15/16"	5/16"	Plate
P2	3-1/8" x 4-1/8"	2-3/8" x 3-3/8"	3/8"	Plate
P3	3-15/16" x 4-1/2"	2-5/8" x 3-5/8"	3/8"	Plate
Code	Note	Stem Size	Type	
GR	swivel only	7/16" x 1-1/2"	Grip Ring	
T3	swivel only	1/2" - 13 x 1-1/2"	Threaded	
T4	swivel only	1/2" - 13 x 2-3/4"	Threaded	
H1	swivel only	3/8" Hole	Stemless	
X2	swivel only	for 7/8" ID tubing	Expanding	
X6	swivel only	for 1-1/2" ID tubing	Expanding	

Replace ** in part number with appropriate Mounting Code above.

Applications:

- Shop carts & equipment
- Medical and lab carts
- Food service equipment
- Warehouse carts
- Bread racks
- Automotive & Electrical equipment
- Moving dollies

Light Medium Duty Total Lock Casters



220-320 lbs Capacity

Total Locking Casters totally lock the caster down -- both the wheel and the swivel.

Double ball bearing swivel raceway, zinc plated finish, and a good selection of floor-protective wheels help make this a must-have caster.

C-ML Series



C-ML4P1PUS



C-ML4T3RS



C-ML5P1BMS

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
3"	1-1/4"	Rubber	220	3"	4-1/4"	C-ML3 ** RS
3"	1-1/4"	Gray TPR •	220	3"	4-1/4"	C-ML3 ** TPS
3"	1-1/4"	Solid Polyurethane Red •	240	3"	4-1/4"	C-ML3 ** PUS
3"	1-1/4"	Heavy Plastic Polyolefin •	300	3"	4-1/4"	C-ML3 ** HDPS
3"	1-1/4"	Blue TPR •	220	3"	4-1/4"	C-ML3 ** BMS
3-1/2"	1-1/4"	Gray TPR •	220	3-1/16"	4-11/16"	C-ML35 ** TPS
3-1/2"	1-1/4"	Solid Polyurethane Blue •	260	3-1/16"	4-11/16"	C-ML35 ** PUS
3-1/2"	1-1/4"	Blue TPR •	220	3-1/16"	4-11/16"	C-ML35 ** BMS
4"	1-1/4"	Rubber	265	3-1/2"	5-1/8"	C-ML4 ** RS
4"	1-1/4"	Gray TPR •	240	3-1/2"	5-1/8"	C-ML4 ** TPS
4"	1-1/4"	Solid Polyurethane Blue •	275	3-1/2"	5-1/8"	C-ML4 ** PUS
4"	1-1/4"	Heavy Plastic Polyolefin •	310	3-1/2"	5-1/8"	C-ML4 ** HDPS
4"	1-1/4"	Blue TPR •	240	3-1/2"	5-1/8"	C-ML4 ** BMS
4"	1-1/4"	DuraPoly™ Red •	265	3-1/2"	5-1/8"	C-ML4 ** DPRS
5"	1-1/4"	Rubber	300	4"	6-5/32"	C-ML5 ** RS
5"	1-1/4"	Gray TPR •	240	4"	6-5/32"	C-ML5 ** TPS
5"	1-1/4"	Heavy Plastic Polyolefin •	320	4"	6-5/32"	C-ML5 ** HDPS
5"	1-1/4"	Blue TPR •	240	4"	6-5/32"	C-ML5 ** BMS
5"	1-1/4"	DuraPoly™ Red •	300	4"	6-5/32"	C-ML5 ** DPRS
5"	1-1/4"	Polyurethane •	300	4"	6-5/32"	C-ML5 ** PUS

• Non-Marking Wheels

DuraPoly™ available in red or burgundy tread.

Replace ** in part number with appropriate mounting code below.

Applications:

- Institutional carts
- Food service equipment
- Store display fixtures
- Industrial products
- Film & movie equipment
- Automotive equipment

Mounting Specifications				
Code	Plate Size	Hole Spacing	Attaching Bolt	Type
P1	2-3/8" x 3-5/8"	1-3/4" x 2-15/16"	5/16"	Plate
Code	Stem Size			
T3	1/2" - 13 x 1-1/2"	Threaded		
Replace ** in part number with appropriate mounting code above.				

Designed above industry standards, they feature full double-ball heat treated raceways, double-welded legs, nut-and-bolt kingpin, zinc plating standard [unplated and stainless steel also available], and zerk fittings for grease to help maintain all bearings. Available with brake or swivel lock.

300-800 lbs Capacity

C-MHD Series



Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
4"	2"	Heavy Plastic Polyolefin •	800	RIGID	5-5/8"	C-MHD4HDPR
4"	2"	Heavy Plastic Polyolefin •	800	3-3/16"	5-5/8"	C-MHD4HDPS
4"	2"	Heavy Plastic Polyolefin w/brake •	800	3-3/16"	5-5/8"	C-MHD4HDPSB
4"	2"	Moldon Rubber	350	RIGID	5-5/8"	C-MHD4MRR
4"	2"	Moldon Rubber	350	3-3/16"	5-5/8"	C-MHD4MRS
4"	2"	Moldon Rubber w/brake	350	3-3/16"	5-5/8"	C-MHD4MRSB
4"	2"	Phenolic •	800	RIGID	5-5/8"	C-MHD4PNR
4"	2"	Phenolic •	800	3-3/16"	5-5/8"	C-MHD4PNS
4"	2"	Phenolic w/brake •	800	3-3/16"	5-5/8"	C-MHD4PNSB
4"	2"	DuraPoly™ Red •	660	RIGID	5-5/8"	C-MHD4DPRR
4"	2"	DuraPoly™ Red •	660	3-3/16"	5-5/8"	C-MHD4DPRS
4"	2"	DuraPoly™ Red w/brake •	660	3-3/16"	5-5/8"	C-MHD4DPRSB
4"	2"	Poly / Cast Iron •	700	RIGID	5-5/8"	C-MHD4PUR
4"	2"	Poly / Cast Iron •	700	3-3/16"	5-5/8"	C-MHD4PUS
4"	2"	Poly / Cast Iron w/brake •	700	3-3/16"	5-5/8"	C-MHD4PUSB
4"	2"	Steel	700	RIGID	5-5/8"	C-MHD4SSR
4"	2"	Steel	700	3-3/16"	5-5/8"	C-MHD4SSS
4"	2"	Steel w/brake	700	3-3/16"	5-5/8"	C-MHD4SSSB
4"	2"	Gray TPR •	300	RIGID	5-5/8"	C-MHD4TPR
4"	2"	Gray TPR •	300	3-3/16"	5-5/8"	C-MHD4TPS
4"	2"	Gray TPR w/brake •	300	3-3/16"	5-5/8"	C-MHD4TPSB

• Non-Marking Wheels

DuraPoly™ also available in Burgundy tread.



C-MHD4DPRS



C-MHD4MRR



C-MHD4PUS



Swivel Lock is
available for
C-MHD casters

Applications:

- Platform trucks
- Flatbed carts
- Containers
- Automotive equipment
- Distribution carts
- Warehouse equipment

Code	Plate Size	Available Top Plates	
		Hole Spacing	Attaching Bolt
[Standard]	3-15/16" x 4-1/2"	2-5/8" x 3-5/8" slotted to 3" x 3"	3/8"
P2	4-1/2" x 6-1/4"	2-7/16" x 4-15/16" to 3-3/8" x 5-1/4"	1/2"

5" Medium Heavy Duty Casters



350-1000 lbs Capacity

Designed above industry standards, they feature full double-ball heat treated raceways, double-welded legs, nut-and-bolt kingpin, zinc plating standard [unplated and stainless steel also available], and zerk fittings for grease to help maintain all bearings. Available with brake or swivel lock.



Quick Change
Caster Pad
Please see
page 73

C-MHD Series



C-MHD5DPRS



C-MHD5PUSB



C-MHD5PUR



Swivel Lock is
available for
C-MHD casters

Applications:

- Platform trucks
- Flatbed carts
- Containers
- Automotive equipment
- Distribution carts
- Warehouse equipment

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
5"	2"	Heavy Plastic Polyolefin •	650	RIGID	6-1/2"	C-MHD5HDPRS
5"	2"	Heavy Plastic Polyolefin •	650	3-7/8"	6-1/2"	C-MHD5HDPS
5"	2"	Heavy Plastic Polyolefin w/brake •	650	3-7/8"	6-1/2"	C-MHD5HDPSB
5"	2"	Moldon Rubber	400	RIGID	6-1/2"	C-MHD5MRR
5"	2"	Moldon Rubber	400	3-7/8"	6-1/2"	C-MHD5MRS
5"	2"	Moldon Rubber w/brake	400	3-7/8"	6-1/2"	C-MHD5MRSB
5"	2"	Phenolic •	900	RIGID	6-1/2"	C-MHD5PNR
5"	2"	Phenolic •	900	3-7/8"	6-1/2"	C-MHD5PNS
5"	2"	Phenolic w/brake •	900	3-7/8"	6-1/2"	C-MHD5PNSB
5"	2"	DuraPoly™ Red •	800	RIGID	6-1/2"	C-MHD5DPRR
5"	2"	DuraPoly™ Red •	800	3-7/8"	6-1/2"	C-MHD5DPRS
5"	2"	DuraPoly™ Red w/brake •	800	3-7/8"	6-1/2"	C-MHD5DPRSB
5"	2"	Poly / Cast Iron •	900	RIGID	6-1/2"	C-MHD5PUR
5"	2"	Poly / Cast Iron •	900	3-7/8"	6-1/2"	C-MHD5PUS
5"	2"	Poly / Cast Iron w/brake •	900	3-7/8"	6-1/2"	C-MHD5PUSB
5"	2"	Steel	1000	RIGID	6-1/2"	C-MHD5SSR
5"	2"	Steel	1000	3-7/8"	6-1/2"	C-MHD5SSS
5"	2"	Steel w/brake	1000	3-7/8"	6-1/2"	C-MHD5SSSB
5"	2"	Gray TPR •	350	RIGID	6-1/2"	C-MHD5TPR
5"	2"	Gray TPR •	350	3-7/8"	6-1/2"	C-MHD5TPS
5"	2"	Gray TPR w/brake •	350	3-7/8"	6-1/2"	C-MHD5TPSB

• Non-Marking Wheels

DuraPoly™ also available in Burgundy tread.

Available Top Plates			
Code	Plate Size	Hole Spacing	Attaching Bolt
[Standard]	3-15/16" x 4-1/2"	2-5/8" x 3-5/8" slotted to 3" x 3"	3/8"
P2	4-1/2" x 6-1/4"	2-7/16" x 4-15/16" to 3-3/8" x 5-1/4"	1/2"

Designed above industry standards, they feature full double-ball heat treated raceways, double-welded legs, nut-and-bolt kingpin, zinc plating standard [unplated and stainless steel also available], and zerk fittings for grease to help maintain all bearings. Available with brake or swivel lock.

425-1000 lbs Capacity

C-MHD Series



Quick Change
Caster Pad
Please see
page 73

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
6"	2"	Heavy Plastic Polyolefin •	750	RIGID	7-1/2"	C-MHD6HDPR
6"	2"	Heavy Plastic Polyolefin •	750	4-9/16"	7-1/2"	C-MHD6HDPS
6"	2"	Heavy Plastic Polyolefin w/brake •	750	4-9/16"	7-1/2"	C-MHD6HDPSB
6"	2"	Moldon Rubber	450	RIGID	7-1/2"	C-MHD6MRR
6"	2"	Moldon Rubber	450	4-9/16"	7-1/2"	C-MHD6MRS
6"	2"	Moldon Rubber w/brake	450	4-9/16"	7-1/2"	C-MHD6MRSB
6"	2"	Phenolic •	1000	RIGID	7-1/2"	C-MHD6PNR
6"	2"	Phenolic •	1000	4-9/16"	7-1/2"	C-MHD6PNS
6"	2"	Phenolic w/brake •	1000	4-9/16"	7-1/2"	C-MHD6PNSB
6"	2"	DuraPoly™ Red •	900	RIGID	7-1/2"	C-MHD6DPRR
6"	2"	DuraPoly™ Red •	900	4-9/16"	7-1/2"	C-MHD6DPRS
6"	2"	DuraPoly™ Red w/brake •	900	4-9/16"	7-1/2"	C-MHD6DPRSB
6"	2"	Poly / Cast Iron •	1000	RIGID	7-1/2"	C-MHD6PUR
6"	2"	Poly / Cast Iron •	1000	4-9/16"	7-1/2"	C-MHD6PUS
6"	2"	Poly / Cast Iron w/brake •	1000	4-9/16"	7-1/2"	C-MHD6PUSB
6"	2"	Steel	1000	RIGID	7-1/2"	C-MHD6SSR
6"	2"	Steel	1000	4-9/16"	7-1/2"	C-MHD6SSS
6"	2"	Steel w/brake	1000	4-9/16"	7-1/2"	C-MHD6SSSB
6"	2"	Gray TPR •	425	RIGID	7-1/2"	C-MHD6TPR
6"	2"	Gray TPR •	425	4-9/16"	7-1/2"	C-MHD6TPS
6"	2"	Gray TPR w/brake •	425	4-9/16"	7-1/2"	C-MHD6TPSB

• Non-Marking Wheels

DuraPoly™ also available in Burgundy tread.



C-MHD6HDPS



C-MHD6DPRR



C-MHD6TPSB



Swivel Lock is
available for
C-MHD casters

Applications:

- Platform trucks
- Flatbed carts
- Containers
- Automotive equipment
- Distribution carts
- Warehouse equipment

Available Top Plates			
Code	Plate Size	Hole Spacing	Attaching Bolt
[Standard]	3-15/16" x 4-1/2"	2-5/8" x 3-5/8" slotted to 3" x 3"	3/8"
P2	4-1/2" x 6-1/4"	2-7/16" x 4-15/16" to 3-3/8" x 5-1/4"	1/2"

8" Medium Heavy Duty Casters



500-1100 lbs Capacity

Designed above industry standards, they feature full double-ball heat treated raceways, double-welded legs, nut-and-bolt kingpin, zinc plating standard [unplated and stainless steel also available], and zerk fittings for grease to help maintain all bearings. Available with brake or swivel lock.



Quick Change
Caster Pad
Please see
page 73

C-MHD Series



C-MHD8PUS



C-MHD8DPRS



C-MHD8MRR



Swivel Lock is
available for
C-MHD casters

Applications:

- Platform trucks
- Flatbed carts
- Containers
- Automotive equipment
- Distribution carts
- Warehouse equipment

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
8"	2"	Heavy Plastic Polyolefin •	900	RIGID	9-1/2"	C-MHD8HDP R
8"	2"	Heavy Plastic Polyolefin •	900	6"	9-1/2"	C-MHD8HDPS
8"	2"	Heavy Plastic Polyolefin w/brake •	900	6"	9-1/2"	C-MHD8HDPSB
8"	2"	Moldon Rubber	500	RIGID	9-1/2"	C-MHD8MRR
8"	2"	Moldon Rubber	500	6"	9-1/2"	C-MHD8MRS
8"	2"	Moldon Rubber w/brake	500	6"	9-1/2"	C-MHD8MR SB
8"	2"	Phenolic •	1000	RIGID	9-1/2"	C-MHD8PNR
8"	2"	Phenolic •	1000	6"	9-1/2"	C-MHD8PNS
8"	2"	Phenolic w/brake •	1000	6"	9-1/2"	C-MHD8PNSB
8"	2"	DuraPoly™ Red •	950	RIGID	9-1/2"	C-MHD8DPR R
8"	2"	DuraPoly™ Red •	950	6"	9-1/2"	C-MHD8DPRS
8"	2"	DuraPoly™ Red w/brake •	950	6"	9-1/2"	C-MHD8DPR SB
8"	2"	Poly / Cast Iron •	1100	RIGID	9-1/2"	C-MHD8PUR
8"	2"	Poly / Cast Iron •	1100	6"	9-1/2"	C-MHD8PUS
8"	2"	Poly / Cast Iron w/brake •	1100	6"	9-1/2"	C-MHD8PUSB
8"	2"	Steel	1000	RIGID	9-1/2"	C-MHD8SSR
8"	2"	Steel	1000	6"	9-1/2"	C-MHD8SSS
8"	2"	Steel w/brake	1000	6"	9-1/2"	C-MHD8SSSB
8"	2"	Gray TPR •	500	RIGID	9-1/2"	C-MHD8TPR
8"	2"	Gray TPR •	500	6"	9-1/2"	C-MHD8TPS
8"	2"	Gray TPR w/brake •	500	6"	9-1/2"	C-MHD8TPSB

• Non-Marking Wheels

DuraPoly™ also available in Burgundy tread.

Available Top Plates			
Code	Plate Size	Hole Spacing	Attaching Bolt
[Standard]	3-15/16" x 4-1/2"	2-5/8" x 3-5/8" slotted to 3" x 3"	3/8"
P2	4-1/2" x 6-1/4"	2-7/16" x 4-15/16" to 3-3/8" x 5-1/4"	1/2"

Total Locking Casters totally lock the caster down -- both the wheel and the swivel.

Hardened double ball bearing swivel raceway, double-welded legs, zinc plated finish, and a good selection of floor-protective wheels help make this a must-have caster.

375-1000 lbs Capacity

C-MML Series

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
5"	2"	Moldon Rubber	400	3-7/8"	6-1/2"	C-MML5MRS
5"	2"	Heavy Plastic Polyolefin •	900	3-7/8"	6-1/2"	C-MML5HDPS
5"	2"	Phenolic •	900	3-7/8"	6-1/2"	C-MML5PNS
5"	2"	Poly / Cast Iron •	900	3-7/8"	6-1/2"	C-MML5PUS
5"	2"	Gray TPR •	375	3-7/8"	6-1/2"	C-MML5TPS
5"	2"	DuraPoly™ Red •	800	3-7/8"	6-1/2"	C-MML5DPRS
6"	2"	Moldon Rubber	450	4-9/16"	7-1/2"	C-MML6MRS
6"	2"	Heavy Plastic Polyolefin •	750	4-9/16"	7-1/2"	C-MML6HDPS
6"	2"	Phenolic •	900	4-9/16"	7-1/2"	C-MML6PNS
6"	2"	Poly / Cast Iron •	1000	4-9/16"	7-1/2"	C-MML6PUS
6"	2"	Gray TPR •	425	4-9/16"	7-1/2"	C-MML6TPS
6"	2"	DuraPoly™ Red •	800	4-9/16"	7-1/2"	C-MML6DPRS

• Non-Marking Wheels

DuraPoly™ also available in Burgundy tread.



C-MML5MRS



C-MML6TPS

Top Plate Mounting Specifications		
Plate Size	Hole Spacing	Attaching Bolt
3-15/16" x 4-1/2"	2-5/8" x 3-5/8" to 3" x 3"	3/8"

Applications:

- Platform trucks
- Film & movie equipment
- Food service equipment
- Automotive equipment
- Warehouse equipment

4" Kingpinless Casters



300–800 lbs Capacity

There is no kingpin to break. Excellent durability. Zerk grease fitting on swivel raceway for lubrication.



C-KL4PNS



C-KL4PUS



C-KL4TPS

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
4"	2"	Heavy Plastic Polyolefin •	550	RIGID	5-5/8"	C-MHD4HDPR
4"	2"	Heavy Plastic Polyolefin •	550	3-3/16"	5-5/8"	C-KL4HDPS
4"	2"	Heavy Plastic Polyolefin w/brake •	550	3-3/16"	5-5/8"	C-KL4HDPSB
4"	2"	Moldon Rubber	350	RIGID	5-5/8"	C-MHD4MRR
4"	2"	Moldon Rubber	350	3-3/16"	5-5/8"	C-KL4MRS
4"	2"	Moldon Rubber w/brake	350	3-3/16"	5-5/8"	C-KL4MRSB
4"	2"	Phenolic •	800	RIGID	5-5/8"	C-MHD4PNR
4"	2"	Phenolic •	800	3-3/16"	5-5/8"	C-KL4PNS
4"	2"	Phenolic w/brake •	800	3-3/16"	5-5/8"	C-KL4PNSB
4"	2"	DuraPoly™ Red •	660	RIGID	5-5/8"	C-MHD4DPRR
4"	2"	DuraPoly™ Red •	660	3-3/16"	5-5/8"	C-KL4DPRS
4"	2"	DuraPoly™ Red w/brake •	660	3-3/16"	5-5/8"	C-KL4DPRSB
4"	2"	Poly / Cast Iron •	700	RIGID	5-5/8"	C-MHD4PUR
4"	2"	Poly / Cast Iron •	700	3-3/16"	5-5/8"	C-KL4PUS
4"	2"	Poly / Cast Iron w/brake •	700	3-3/16"	5-5/8"	C-KL4PUSB
4"	2"	Steel	700	RIGID	5-5/8"	C-MHD4SSR
4"	2"	Steel	700	3-3/16"	5-5/8"	C-KL4SSS
4"	2"	Steel w/brake	700	3-3/16"	5-5/8"	C-KL4SSSB
4"	2"	Gray TPR •	300	RIGID	5-5/8"	C-MHD4TPR
4"	2"	Gray TPR •	300	3-3/16"	5-5/8"	C-KL4TPS
4"	2"	Gray TPR w/brake •	300	3-3/16"	5-5/8"	C-KL4TPSB

• Non-Marking Wheels

DuraPoly™ also available in Burgundy tread.

Applications:

- Platform trucks
- Flatbed carts
- Containers
- Automotive equipment
- Distribution carts
- Warehouse equipment

Mounting Specifications		
Plate Size	Hole Spacing	Attaching Bolt
3-15/16" x 4-1/2"	2-5/8" x 3-5/8" to 3" x 3"	3/8"

5" Kingpinless Casters

There is no kingpin to break. Excellent durability. Zerk grease fitting on swivel raceway for lubrication.

350-1000 lbs Capacity

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
5"	2"	Heavy Plastic Polyolefin •	650	RIGID	6-1/2"	C-MHD5HDPR
5"	2"	Heavy Plastic Polyolefin •	650	3-7/8"	6-1/2"	C-KL5HDPS
5"	2"	Heavy Plastic Polyolefin w/brake •	650	3-7/8"	6-1/2"	C-KL5HDPSB
5"	2"	Moldon Rubber	400	RIGID	6-1/2"	C-MHD5MRR
5"	2"	Moldon Rubber	400	3-7/8"	6-1/2"	C-KL5MRS
5"	2"	Moldon Rubber w/brake	400	3-7/8"	6-1/2"	C-KL5MRSB
5"	2"	Phenolic •	900	RIGID	6-1/2"	C-MHD5PNR
5"	2"	Phenolic •	1000	3-7/8"	6-1/2"	C-KL5PNS
5"	2"	Phenolic w/brake •	1000	3-7/8"	6-1/2"	C-KL5PNSB
5"	2"	DuraPoly™ Red •	800	RIGID	6-1/2"	C-MHD5DPRR
5"	2"	DuraPoly™ Red •	800	3-7/8"	6-1/2"	C-KL5DPRS
5"	2"	DuraPoly™ Red w/brake •	800	3-7/8"	6-1/2"	C-KL5DPRSB
5"	2"	Poly / Cast Iron •	900	RIGID	6-1/2"	C-MHD5PUR
5"	2"	Poly / Cast Iron •	1000	3-7/8"	6-1/2"	C-KL5PUS
5"	2"	Poly / Cast Iron w/brake •	1000	3-7/8"	6-1/2"	C-KL5PUSB
5"	2"	Steel	1000	RIGID	6-1/2"	C-MHD5SSR
5"	2"	Steel	1000	3-7/8"	6-1/2"	C-KL5SSS
5"	2"	Steel w/brake	1000	3-7/8"	6-1/2"	C-KL5SSSB
5"	2"	Gray TPR •	350	RIGID	6-1/2"	C-MHD5TPR
5"	2"	Gray TPR •	350	3-7/8"	6-1/2"	C-KL5TPS
5"	2"	Gray TPR w/brake •	350	3-7/8"	6-1/2"	C-KL5TPSB

• Non-Marking Wheels

DuraPoly™ also available in Burgundy tread.

Mounting Specifications		
Plate Size	Hole Spacing	Attaching Bolt
3-15/16" x 4-1/2"	2-5/8" x 3-5/8" to 3" x 3"	3/8"



C-KL5PNS



C-MHD5PUR



C-KL5SSS

Applications:

- Platform trucks
- Flatbed carts
- Containers
- Automotive equipment
- Distribution carts
- Warehouse equipment

6" Kingpinless Casters



425-1200 lbs Capacity

There is no kingpin to break. Excellent durability.
Zerk grease fitting on swivel raceway for lubrication.



C-KL6HDPS



C-KL6DPRS



C-KL6PUS



C-KL6TPS

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
6"	2"	Heavy Plastic Polyolefin •	750	RIGID	7-1/2"	C-MHD6HDPR
6"	2"	Heavy Plastic Polyolefin •	750	4-9/16"	7-1/2"	C-KL6HDPS
6"	2"	Heavy Plastic Polyolefin w/brake •	750	4-9/16"	7-1/2"	C-KL6HDPSB
6"	2"	Moldon Rubber	450	RIGID	7-1/2"	C-MHD6MRR
6"	2"	Moldon Rubber	450	4-9/16"	7-1/2"	C-KL6MRS
6"	2"	Moldon Rubber w/brake	450	4-9/16"	7-1/2"	C-KL6MRSB
6"	2"	Phenolic •	1000	RIGID	7-1/2"	C-MHD6PNR
6"	2"	Phenolic •	1200	4-9/16"	7-1/2"	C-KL6PNS
6"	2"	Phenolic w/brake •	1200	4-9/16"	7-1/2"	C-KL6PNSB
6"	2"	DuraPoly™ Red •	900	RIGID	7-1/2"	C-MHD6DPRR
6"	2"	DuraPoly™ Red •	900	4-9/16"	7-1/2"	C-KL6DPRS
6"	2"	DuraPoly™ Red w/brake •	900	4-9/16"	7-1/2"	C-KL6DPRSB
6"	2"	Poly / Cast Iron •	1000	RIGID	7-1/2"	C-MHD6PUR
6"	2"	Poly / Cast Iron •	1200	4-9/16"	7-1/2"	C-KL6PUS
6"	2"	Poly / Cast Iron w/brake •	1200	4-9/16"	7-1/2"	C-KL6PUSB
6"	2"	Steel	1000	RIGID	7-1/2"	C-MHD6SSR
6"	2"	Steel	1200	4-9/16"	7-1/2"	C-KL6SSS
6"	2"	Steel w/brake	1200	4-9/16"	7-1/2"	C-KL6SSSB
6"	2"	Gray TPR •	425	RIGID	7-1/2"	C-MHD6TPR
6"	2"	Gray TPR •	425	4-9/16"	7-1/2"	C-KL6TPS
6"	2"	Gray TPR w/brake •	425	4-9/16"	7-1/2"	C-KL6TPSB

• Non-Marking Wheels

DuraPoly™ also available in Burgundy tread.

Applications:

- Platform trucks
- Flatbed carts
- Containers
- Automotive equipment
- Distribution carts
- Warehouse equipment

Mounting Specifications		
Plate Size	Hole Spacing	Attaching Bolt
3-15/16" x 4-1/2"	2-5/8" x 3-5/8" to 3" x 3"	3/8"

8" Kingpinless Casters

There is no kingpin to break. Excellent durability. Zerk grease fitting on swivel raceway for lubrication.

500-1400 lbs Capacity

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
8"	2"	Heavy Plastic Polyolefin •	900	RIGID	9-1/2"	C-MHD8HDPR
8"	2"	Heavy Plastic Polyolefin •	900	6"	9-1/2"	C-KL8HDPS
8"	2"	Heavy Plastic Polyolefin w/brake •	900	6"	9-1/2"	C-KL8HDPSB
8"	2"	Moldon Rubber	500	RIGID	9-1/2"	C-MHD8MRR
8"	2"	Moldon Rubber	500	6"	9-1/2"	C-KL8MRS
8"	2"	Moldon Rubber w/brake	500	6"	9-1/2"	C-KL8MRSB
8"	2"	Phenolic •	1000	RIGID	9-1/2"	C-MHD8PNR
8"	2"	Phenolic •	1400	6"	9-1/2"	C-KL8PNS
8"	2"	Phenolic w/brake •	1400	6"	9-1/2"	C-KL8PNSB
8"	2"	DuraPoly™ Red •	950	RIGID	9-1/2"	C-MHD8DPRR
8"	2"	DuraPoly™ Red •	950	6"	9-1/2"	C-KL8DPRS
8"	2"	DuraPoly™ Red w/brake •	950	6"	9-1/2"	C-KL8DPRSB
8"	2"	Poly / Cast Iron •	1100	RIGID	9-1/2"	C-MHD8PUR
8"	2"	Poly / Cast Iron •	1400	6"	9-1/2"	C-KL8PUS
8"	2"	Poly / Cast Iron w/brake •	1400	6"	9-1/2"	C-KL8PUSB
8"	2"	Steel	1100	RIGID	9-1/2"	C-MHD8SSR
8"	2"	Steel	1400	6"	9-1/2"	C-KL8SSS
8"	2"	Steel w/brake	1400	6"	9-1/2"	C-KL8SSSB
8"	2"	Gray TPR •	500	RIGID	9-1/2"	C-MHD8TPR
8"	2"	Gray TPR •	500	6"	9-1/2"	C-KL8TPS
8"	2"	Gray TPR w/brake •	500	6"	9-1/2"	C-KL8TPSB

• Non Marking Wheels

DuraPoly™ also available in Burgundy tread.



C-KL8PUS



C-MHD8MRR



C-KL8TPS

Applications:

- Platform trucks
- Flatbed carts
- Containers
- Automotive equipment
- Distribution carts
- Warehouse equipment

Mounting Specifications		
Plate Size	Hole Spacing	Attaching Bolt
3-15/16" x 4-1/2"	2-5/8" x 3-5/8" to 3" x 3"	3/8"

6" & 8" Drop Forged Casters



450-1400 lbs Capacity

Drop Forged Heavy Duty casters feature AISI 1045 hot forged steel with more impact resistance, yet still rolls smooth. Precision bearing raceway, zinc plated finish, 5/16" welded legs, 3/8" thick top plate, nut and bolt kingpin, 3/4" axle with zerk fittings for wheel and swivel bearings.

C-DF Series



C-DF6PUS



C-DF6PNS

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
6"	2"	Moldon Rubber	450	4-7/8"	7-1/2"	C-DF6MRS
6"	2"	Heavy Plastic Polyolefin •	700	4-7/8"	7-1/2"	C-DF6HDPS
6"	2"	Phenolic •	1200	4-7/8"	7-1/2"	C-DF6PNS
6"	2"	Poly / Cast Iron •	1200	4-7/8"	7-1/2"	C-DF6PUS
6"	2"	Steel	1200	4-7/8"	7-1/2"	C-DF6SSS
8"	2"	Heavy Plastic Polyolefin •	900	6-13/16"	9-1/2"	C-DF8HDPS
8"	2"	Moldon Rubber	500	6-13/16"	9-1/2"	C-DF8MRS
8"	2"	Steel	1400	6-13/16"	9-1/2"	C-DF8SSS
8"	2"	Phenolic •	1400	6-13/16"	9-1/2"	C-DF8PNS
8"	2"	Poly / Cast Iron •	1400	6-13/16"	9-1/2"	C-DF8PUS

• Non-Marking Wheels

Applications:

- Cargo containers
- Factory assembly tables
- Heavy machinery

Mounting Specifications		
Plate Size	Hole Spacing	Attaching Bolt
4-1/2" x 6-1/4"	2-7/16" x 4-15/16" to 3-3/8" x 5-1/4"	1/2"

Drop Forged Heavy Duty casters feature AISI 1045 hot forged steel with more impact resistance, yet still rolls smooth. With wheels for almost any condition, and extra width for extra strength, these casters are the right choice when you need more muscle.

Full double ball bearing raceway, zinc plated finish, 5/16" welded legs, 3/8" thick top plate, nut and bolt kingpin, 3/4" axle with zerk fittings for wheel and swivel bearings.

750-2000 lbs Capacity

C-SHD Series

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
6"	2-1/2"	Phenolic •	1600	RIGID	7-1/2"	C-SHD625PNR
6"	2-1/2"	Phenolic •	1600	4-7/8"	7-1/2"	C-SHD625PNS
6"	2-1/2"	Poly / Cast Iron •	1600	RIGID	7-1/2"	C-SHD625PUR
6"	2-1/2"	Poly / Cast Iron •	1600	4-7/8"	7-1/2"	C-SHD625PUS
6"	3"	Moldon Rubber	750	RIGID	8"	C-SHD630MRR
6"	3"	Moldon Rubber	750	5-3/4"	8"	C-SHD630MRS
6"	3"	Phenolic •	2000	RIGID	8"	C-SHD630PNR
6"	3"	Phenolic •	2000	5-3/4"	8"	C-SHD630PNS
6"	3"	Poly / Cast Iron •	2000	RIGID	8"	C-SHD630PUR
6"	3"	Poly / Cast Iron •	2000	5-3/4"	8"	C-SHD630PUS
6"	3"	Steel	2000	RIGID	8"	C-SHD630SSR
6"	3"	Steel	2000	5-3/4"	8"	C-SHD630SSS

• Non-Marking Wheels



C-SHD625PUS



C-SHD630PNS



C-SHD630MRR

Applications:

- Cargo containers
- Factory assembly tables
- Heavy machinery

Mounting Specifications			
Tread Width	Plate Size	Hole Spacing	Attaching Bolt
2-1/2"	4-1/2" x 6-1/4"	2-7/16" x 4-15/16" to 3-3/8" x 5-1/4"	1/2"
3"	5-1/4" x 7-1/4"	4-1/8" x 6-1/8" to 3-3/8" x 5-1/4"	3/4"

8" Drop Forged Heavy Duty Casters



1900-2500 lbs Capacity

Drop Forged Heavy Duty casters feature AISI 1045 hot forged steel with more impact resistance, yet still rolls smooth. With wheels for almost any condition, and extra width for extra strength, these casters are the right choice when you need more muscle.

Full double ball bearing raceway, zinc plated finish, 5/16" welded legs, 3/8" thick top plate, nut and bolt kingpin, 3/4" axle with zerk fittings for wheel and swivel bearings.

C-SHD Series



C-SHD830PUS



C-SHD830PUR



C-SHD830PNS

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
8"	2-1/2"	Phenolic •	2000	RIGID	10-1/8"	C-SHD825PNR
8"	2-1/2"	Phenolic •	2000	6-13/16"	10-1/8"	C-SHD825PNS
8"	2-1/2"	Poly / Cast Iron •	1900	RIGID	10-1/8"	C-SHD825PUR
8"	2-1/2"	Poly / Cast Iron •	1900	6-13/16"	10-1/8"	C-SHD825PUS
8"	2-1/2"	Steel	1900	RIGID	10-1/2"	C-SHD825SSR
8"	2-1/2"	Steel	1900	6-3/4"	10-1/2"	C-SHD825SSS
8"	3"	Phenolic •	2500	RIGID	10-1/2"	C-SHD830PNR
8"	3"	Phenolic •	2500	6-3/4"	10-1/2"	C-SHD830PNS
8"	3"	Poly / Cast Iron •	2500	RIGID	10-1/2"	C-SHD830PUR
8"	3"	Poly / Cast Iron •	2500	6-3/4"	10-1/2"	C-SHD830PUS
8"	3"	Steel	2500	RIGID	10-1/2"	C-SHD830SSR
8"	3"	Steel	2500	6-3/4"	10-1/2"	C-SHD830SSS

• Non-Marking Wheels

Applications:

- Cargo containers
- Factory assembly tables
- Heavy machinery

Tread Width	Plate Size	Mounting Specifications	
		Hole Spacing	Attaching Bolt
2-1/2"	4-1/2" x 6-1/4"	2-7/16" x 4-15/16" to 3-3/8" x 5-1/4"	1/2"
3"	5-1/4" x 7-1/4"	4-1/8" x 6-1/8" to 3-3/8" x 5-1/4"	3/4"

Drop Forged Heavy Duty casters feature AISI 1045 hot forged steel with more impact resistance, yet still rolls smooth. With wheels for almost any condition, and extra width for extra strength, these casters are the right choice when you need more muscle.

Full double ball bearing raceway, zinc plated finish, 5/16" welded legs, 3/8" thick top plate, nut and bolt kingpin, 3/4" axle with zerk fittings for wheel and swivel bearings.

2200-3200 lbs Capacity

C-SHD Series

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
10"	2-1/2"	Phenolic •	2500	RIGID	11-7/8"	C-SHD1025PNR
10"	2-1/2"	Phenolic •	2500	8-1/4"	11-7/8"	C-SHD1025PNS
10"	2-1/2"	Poly / Cast Iron •	2200	RIGID	11-7/8"	C-SHD1025PUR
10"	2-1/2"	Poly / Cast Iron •	2200	8-1/4"	11-7/8"	C-SHD1025PUS
10"	2-1/2"	Steel	2200	RIGID	11-7/8"	C-SHD1025SSR
10"	2-1/2"	Steel	2200	8-1/4"	11-7/8"	C-SHD1025SSS
10"	3"	Phenolic •	2900	RIGID	12-1/2"	C-SHD1030PNR
10"	3"	Phenolic •	2900	7-1/2"	12-1/2"	C-SHD1030PNS
10"	3"	Poly / Cast Iron •	3000	RIGID	12-1/2"	C-SHD1030PUR
10"	3"	Poly / Cast Iron •	3000	7-1/2"	12-1/2"	C-SHD1030PUS
10"	3"	Steel	2500	RIGID	12-1/2"	C-SHD1030SSR
10"	3"	Steel	2500	7-1/2"	12-1/2"	C-SHD1030SSS
12"	3"	Phenolic •	3200	RIGID	15-1/2"	C-SHD1230PNR
12"	3"	Phenolic •	3200	9-1/4"	15-1/2"	C-SHD1230PNS
12"	3"	Poly / Cast Iron •	3200	RIGID	15-1/2"	C-SHD1230PUR
12"	3"	Poly / Cast Iron •	3200	9-1/4"	15-1/2"	C-SHD1230PUS
12"	3"	Steel	3000	RIGID	15-1/2"	C-SHD1230SSR
12"	3"	Steel	3000	9-1/4"	15-1/2"	C-SHD1230SSS

• Non-Marking Wheels

Mounting Specifications			
Tread Width	Plate Size	Hole Spacing	Attaching Bolt
2-1/2"	4-1/2" x 6-1/4"	2-7/16" x 4-15/16" to 3-3/8" x 5-1/4"	1/2"
3"	5-1/4" x 7-1/4"	4-1/8" x 6-1/8" to 3-3/8" x 5-1/4"	3/4"



C-SHD1025PUS



C-SHD1230PUR

Applications:

- Cargo containers
- Factory assembly tables
- Heavy machinery

350 lbs Capacity

Air-filled pneumatics provide extra-cushion and support.

Also available in NeverFlat™. [page 39]

Double-row ball bearing swivel raceway, zinc plated finish, ball bearings in wheels, and optional wheel brake.

C-PN Series



C-PN8212RS



C-PN10312RSB



C-PN10312RR

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
8"	2-1/2"	Pneumatic	350	RIGID	10"	C-PN8212RR
8"	2-1/2"	Pneumatic	350	6-5/8"	10"	C-PN8212RS
8"	2-1/2"	Pneumatic with brake	350	6-5/8"	10"	C-PN8212RSB
10"	3-1/2"	Pneumatic	350	RIGID	12"	C-PN10312RR
10"	3-1/2"	Pneumatic	350	8-1/4"	12"	C-PN10312RS
10"	3-1/2"	Pneumatic with brake	350	8-1/4"	12"	C-PN10312RSB

Applications:

- Food service equipment
- Film & movie equipment
- Cargo containers

Top Plate Mounting Specifications		
Plate Size	Hole Spacing	Attaching Bolt
3-15/16" x 4-1/2"	2-5/8" x 3-5/8" to 3" x 3"	3/8"

Air-free **NeverFlat™** [polyurethane foam] provides extra-cushion and support.

Also available in air-filled pneumatics. [page 38]

Double-row ball bearing swivel raceway, zinc plated

250-350 lbs Capacity

C-NF Series

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
6"	2"	NeverFlat™	250	RIGID	7-1/2"	C-NF60200RR
6"	2"	NeverFlat™	250	4-37/64"	7-1/2"	C-NF60200RS
8"	2-1/2"	NeverFlat™	350	RIGID	10"	C-NF8212RR
8"	2-1/2"	NeverFlat™	350	6-5/8"	10"	C-NF8212RS
8"	2-1/2"	NeverFlat™ w/brake	350	6-5/8"	10"	C-NF8212RSB
10"	3-1/2"	NeverFlat™ Gray	350	RIGID	12"	C-NF10312GR
10"	3-1/2"	NeverFlat™ Gray	350	8-1/4"	12"	C-NF10312GS
10"	3-1/2"	NeverFlat™ Gray w/brake	350	8-1/4"	12"	C-NF10312GSB



C-NF60200RS



C-NF8212RS



C-NF10312GS

Applications:

- Food service equipment
- Film & movie equipment
- Cargo containers

Top Plate Mounting Specifications		
Plate Size	Hole Spacing	Attaching Bolt
3-15/16" x 4-1/2"	2-5/8" x 3-5/8" to 3" x 3"	3/8"

Twin Wheel Furniture Casters



70-85 lbs Capacity

All plastic nylon bodies and wheels provide strength and ease-of-rolling on any surface. Optional brake available.

C-T Series



C-T15P1BK



C-T15P1BKB



C-T20T1BK



C-T20UBBK

Wheel Size	Wheel Description	Load Cap.	Finish	Overall Height	Part Number
1-1/2"	Twin Wheel •	70	Black	1-3/4"	C-T15 ** BK
1-1/2"	Twin Wheel with brake •	70	Black	1-3/4"	C-T15 ** BKB
2"	Twin Wheel •	85	Black	2-3/8"	C-T20 ** BK
2"	Twin Wheel with brake •	85	Black	2-3/8"	C-T20 ** BKB

• Non-Marking Wheels

Replace ** in part number with appropriate Mounting Code below.

Applications:

- Office furniture
- Store fixtures
- Home carts & racks

Mounting Specifications		
Code	Size	Type
P1	1-1/2" x 1-1/2"	Plate
P2	2-1/16" x 1-1/4"	Plate
S1	5/16" x 1-1/2"	Stem & Socket
GR	7/16" x 1-1/2"	Grip Ring
T1	5/16" - 18 x 1"	Threaded
UB	5/8" ▲	U-Bracket
34UB	3/4" ▲	U-Bracket
▲ Special Order		

Simple casters for simple needs. Zinc finish with light duty plastic wheels are sturdy and dependable.

45-77 lbs Capacity

C-R Series

Wheel Size	Tread Width	Wheel Description	Load Cap.	Overall Height	Part Number
1-1/4"	9/16"	Plastic •	45	1-1/2"	C-R125**Z
1-5/8"	5/8"	Plastic •	65	1-7/8"	C-R158**Z
2"	13/16"	Plastic •	77	2-21/32"	C-R200P0Z

• Non-Marking Wheels Replace ** in part number with appropriate Mounting Code below.



C-R125P0Z

Mounting Specifications			
Code	Wheel Size	Plate Size	Type
P0	1-1/4", 1-5/8"	1-5/8" x 1-1/4"	Plate
P0	2" only	1-1/4" x 2-1/16"	Plate
Code	Wheel Size	Stem Size	Type
S1	1-1/4", 1-5/8"	5/16" x 1-1/2"	Stem

Applications:

- Light office furniture
- Light weight carts
- Cribs and changing tables

Bed Roller Casters

Available in brass finish, with brown wheel. Optional brake available. Provides easy rolling on rugs and carpets.

Up to 165 lbs Capacity

C-B02 Series

Wheel Size	Tread Width	Wheel Description	Load Cap.	Wheel Color	Overall Height	Part Number
2"	2-1/4"	Plastic •	165	Brown	2-3/8"	C-B02214B

• Non-Marking Wheel



C-B02214B

Mounting Specifications	
Size	Type
3/8" [Bed stem]	Stem & Socket

Applications:

- Bed frames
- Home furniture

200-500 lbs Capacity

Twin wheel version for easy-rolling. Single wheel model for strength. Zinc plated finish, double ball raceway.



C-B22034P1HR

2" Double Wheel

C-B220 Series

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
2"	13/16"	Hard Rubber	200	1-7/8"	2-13/16"	C-B22034 ** HR
2"	13/16"	Hard Rubber with brake	200	1-7/8"	2-13/16"	C-B22034 ** HRB
2"	13/16"	Polyolefin •	300	1-7/8"	2-13/16"	C-B22034 ** PS
2"	13/16"	Polyolefin with brake•	300	1-7/8"	2-13/16"	C-B22034 ** PSB

• Non-Marking Wheels

Replace ** in part number with appropriate Mounting Code below.



C-B20034T2PS

2" Single Wheel

C-B200 Series

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
2"	1-11/16"	Polyolefin •	300	1-7/8"	2-13/16"	C-B20034 ** PS
2"	1-11/16"	Polyolefin with brake•	300	1-7/8"	2-13/16"	C-B20034 ** PSB

• Non-Marking Wheels

Replace ** in part number with appropriate Mounting Code below.



C-BU3P2NS

3" Single Wheel

C-BU3 Series

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
3"	1-7/8"	Nylon •	500	RIGID	4-1/8"	C-BU3P2NR
3"	1-7/8"	Nylon •	500	2-5/16"	4-1/8"	C-BU3P2NS
3"	1-7/8"	Nylon with brake•	500	2-5/16"	4-1/8"	C-BU3P2NSB

• Non-Marking Wheels

Applications:

- Pianos
- Computer mainframes
- Store display fixtures
- Grocery coolers & freezers
- Vending machines

Mounting Specifications					
Code		Plate Size	Hole Spacing	Bolt Size	Type
P1	2" only	2-3/4" x 3-3/4"	1-3/4" x 2-7/8"	5/16"	Plate
P2	3" only	3-1/4" x 4-1/4"	2-5/16" x 3-1/4"	5/16"	Plate
Code		Stem Size			Type
GR	2" only	7/16" x 1-1/2"			Grip Ring
T2	2" only	1/2" - 13 x 1-1/2"			Threaded

Spring-loaded gate casters designed for uneven surfaces.
Zinc plated and double ball raceway.
Includes mounting bracket and spring.

Up to 200 lbs Capacity

C-GSL Series

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
3"	13/16"	Hard Rubber	100	2-3/8"	9-1/2"	C-GSL3
3"	13/16"	Hard Rubber with brake	100	2-3/8"	9-1/2"	C-GSL3B
4"	1-1/4"	Hard Rubber	200	3-1/2"	11"	C-GSL4
4"	1-1/4"	Hard Rubber with brake	200	3-1/2"	11"	C-GSL4B
5"	1-1/4"	Hard Rubber	200	4"	12"	C-GSL5
5"	1-1/4"	Hard Rubber with brake	200	4"	12"	C-GSL5B



C-GSL3

Applications:

- Residential gates
- Industrial doors

Mounting Specifications		
Hole Spacing	Attaching Bolt	Type
2-1/4"	3/8"	Frame

Heavy General Duty Casters

Superior quality, smooth rolling with black semi-gloss finish.

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
2"	1"	Polyurethane •	150	2"	2-7/8"	CB-HGD20PTS

• Non-Marking Wheel



CB-HGD20PTS

Mounting Specifications		
Plate Size	Hole Spacing	Attaching Bolt
2" x 2-13/16"	1-3/8" x 2"	5/16"

Applications:

- Store fixtures
- Office furniture

Soft Rubber Wheels



90–200 lbs Capacity

Soft Rubber wheels feature floor protection, quiet and smooth rolling operation, resistant to oil, water and many chemicals. Shore A Durometer 80.

W-SR Series



W-SR25118N56



W-SR40100S3

Wheel Size	Tread Width	Bearing	Load Cap.	Part Number
2"	29/32"	1/4" Nylon	90	W-SR20100N4
2-1/2"	1-1/8"	5/16" Nylon	100	W-SR25118N56
3"	1"	5/16" Nylon	110	W-SR30100N56
3"	1-1/4"	3/8" Nylon	125	W-SR30114N56
4"	1"	5/16" Nylon	125	W-SR40100N56
4"	1"	3/8" Steel	140	W-SR40100S3
4"	1-1/2"	7/16" Nylon	200	W-SR40156N3
5"	1"	5/16" Nylon	130	W-SR50100N56
5"	1-1/4"	3/8" Nylon	175	W-SR50114N3

Applications:

- General Duty casters
- Light-Medium Duty casters
- Store fixtures
- Light office furniture

Shopping Cart Casters

Up to 250 lbs Capacity

Special keylock stem is designed to work with the most popular shopping carts on the market. These casters also feature nut and bolt wheel axle, zinc plated finish and excellent mobility. Non-marking.



C-SC5T1PS

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
5"	1-1/4"	Polyurethane •	250	4"	5-7/8"	C-SC5T1PS

• Non-Marking Wheel

Components	Part Number
5" Shopping Cart Caster Yoke Only	Y-SC5T1
5" Shopping Cart Polyurethane Wheel Only	W-SC5P

Applications:

- Shopping carts

Mounting Specifications		
Code	Size	Type
T1	1/2" - 13 x 7/8"	Threaded

Hard Rubber wheels feature floor protection, smooth rolling operation, resistant to oil, water and many chemicals. Shore A Durometer 95.

125–300 lbs Capacity

W-HR Series

Wheel Size	Tread Width	Bearing	Load Cap.	Part Number
2"	29/32"	1/4" Nylon	125	W-HR20100N4
2-1/2"	1-1/8"	5/16" Nylon	175	W-HR25118N56
3"	1"	5/16" Nylon	150	W-HR30100N56
3"	1-1/4"	3/8" Nylon	220	W-HR30114P38
3-1/2"	1-1/4"	3/8" Nylon	250	W-HR35114P38
4"	1"	5/16" Nylon	250	W-HR40100N56
4"	1-1/4"	3/8" Nylon	265	W-HR40114P38
4"	1-1/2"	7/16" Nylon	300	W-HR40156N3
5"	1"	5/16" Nylon	270	W-HR50100N56
5"	1-1/4"	3/8" Nylon	300	W-HR50114P38



W-HR30114P38



W-HR40114P38

Applications:

- General Duty casters
- Light-Medium Duty casters
- Store fixtures
- Light office furniture

Moldon Rubber Wheels

Rubber tread on cast iron core with roller bearings for easy handling of heavy loads. Excellent durability.

350–500 lbs Capacity

Wheel Size	Tread Width	Bearing	Load Cap.	Wheel Description	Part Number
4"	2"	3/4" Roller - Centered Hub	350	Moldon Rubber	W-MHD4MR
5"	2"	3/4" Roller - Centered Hub	400	Moldon Rubber	W-MHD5MR
6"	2"	3/4" Roller - Centered Hub	450	Moldon Rubber	W-MHD6MR
8"	2"	3/4" Roller - Centered Hub	500	Moldon Rubber	W-MHD8MR



W-MHD6MR

Applications:

- Platform trucks
- Heavy equipment
- Waste bins

Gray Rubber Wheels



120–300 lbs Capacity

Gray non-marking rubber wheels offer excellent floor protection, and are quiet and smooth-rolling. Shore A Durometer 80.

W-MR Series



W-MR30114P38



W-MR40114P38

Wheel Size	Tread Width	Bearing	Load Cap.	Part Number
2"	29/32"	1/4" Nylon	150	W-MR20100N4
2-1/2"	1-1/8"	5/16" Nylon	200	W-MR25118N56
3"	1-1/4"	3/8" Nylon	225	W-MR30114P38
4"	1-1/4"	3/8" Nylon	300	W-MR40114P38
5"	1-1/4"	3/8" Plain	300	W-MR50114P38

Applications:

- Light-Medium Duty casters
- Display fixtures
- Institutional equipment

Blue TPR Wheels

220-240 lbs Capacity

Non-marking blue Thermoplastic Rubber offers easy-rolling, smooth and dependable performance.



W-BMR4

Wheel Size	Tread Width	Bearing	Load Cap.	Part Number
3"	1-1/4"	3/8" Ball	220	W-BMR3
3-1/2"	1-1/4"	3/8" Ball	220	W-BMR35
4"	1-1/4"	3/8" Ball	240	W-BMR4
5"	1-1/4"	3/8" Ball	240	W-BMR5

Applications:

- Light institutional equipment
- Display fixtures
- Light industrial carts

Gray non-marking Thermoplastic Rubber tread on a polypropylene core. Excellent floor protection and maneuverability.

175–500 lbs Capacity

Wheel Size	Tread Width	Bearing	Load Cap.	Part Number
3"	1"	5/16" Plain	175	W-TP30100P56
3"	1-1/4"	3/8" Precision Ball	220	W-TP30114B3
3-1/2"	1-1/4"	3/8" Precision Ball	220	W-TP35114B3
4"	1"	5/16" Plain	200	W-TP40100P56
4"	1-1/4"	3/8" Precision Ball	240	W-TP40114B3
4"	2"	3/4" Roller	300	W-MHD4TP
5"	1"	5/16" Plain	225	W-TP50100P56
5"	1-1/4"	3/8" Precision Ball	240	W-TP50114B3
5"	2"	3/4" Roller	350	W-MHD5TP
6"	2"	3/4" Roller	425	W-MHD6TP
8"	2"	3/4" Roller	500	W-MHD8TP



W-TP40114B3



W-MHD6TP

Applications:

- Institutional equipment
- Food service equipment
- Industrial applications

Aluminum Hub Wheels



220–450 lbs Capacity

Rubber tread bonded to an aluminum core. Resistant to water and most chemicals.

W-AH Series



W-AH35118AB3



W-AH60112B6

Applications:

- Food service equipment
- Textile carts
- Handtrucks
- Large stock carts

Wheel Size	Tread Width	Bearing	Load Cap.	Part Number
3-1/2"	1-1/4"	3/8" Annular Ball - Centered Hub	220	W-AH35118AB3
4"	1-1/4"	3/8" Annular Ball - Centered Hub	240	W-AH40118AB3
5"	1-1/4"	3/8" Annular Ball - Centered Hub	265	W-AH50118AB3
5"	1-1/4"	3/8" Precision - Centered Hub	265	W-AH50114B3
6"	1-1/2"	1/2" Ball - Centered Hub	350	W-AH60112B4
6"	1-1/2"	5/8" Ball - Centered Hub	350	W-AH60112B5
6"	1-1/2"	3/4" Ball - Centered Hub	350	W-AH60112B6
6"	2"	1/2" Roller - Centered Hub	410	W-AH60200RB4
8"	1-5/8"	1/2" Ball - Offset Hub	400	W-AH80134B4
8"	1-5/8"	5/8" Ball - Offset Hub	400	W-AH80134B5
8"	1-5/8"	3/4" Ball - Offset Hub	400	W-AH80134B6
8"	2"	1/2" Roller - Centered Hub	450	W-AH80200RB4
8"	2"	3/4" Roller - Centered Hub	450	W-AH80200RB6

Balloon Wheels

300–350 lbs Capacity

Rubber molded onto strong aluminum core. Cushion tread for extra floor protection. Quiet and smooth-rolling. Rounded tread for easier turning and rolling.



W-BA8020GB4

Wheel Size	Wheel Color	Tread Width	Bearing	Load Cap.	Part Number
6"	Black	2"	3/4" Roller - Centered Hub	300	W-BA6020BB4
6"	Gray	2"	3/4" Roller - Centered Hub	300	W-BA6020GB4
8"	Black	2"	3/4" Roller - Centered Hub	350	W-BA8020BB4
8"	Gray	2"	3/4" Roller - Centered Hub	350	W-BA8020GB4

Applications:

- Platform trucks
- Handtrucks
- Material handling equipment

Polyurethane tread on a polypropylene core. Excellent durability and rollability. Acts like rubber, but lasts longer. Floor-protective and non-marking.

220–950 lbs Capacity

Wheel Size	Tread Width	Bearing	Load Cap.	Part Number
3"	1-1/4"	3/8" Ball	220	W-DP30114RB3
3"	1-1/4"	3/8" Ball	220	W-DP30114BB3
3-1/2"	1-1/4"	3/8" Ball	260	W-DP35114RB3
3-1/2"	1-1/4"	3/8" Ball	260	W-DP35114BB3
4"	1-1/4"	3/8" Ball	275	W-DP40114RB3
4"	1-1/4"	3/8" Ball	275	W-DP40114BB3
4"	2"	3/4" Roller	660	W-MHD4DPB
4"	2"	3/4" Roller	660	W-MHD4DPR
5"	1-1/4"	3/8" Ball	300	W-DP50114RB3
5"	1-1/4"	3/8" Ball	300	W-DP50114BB3
5"	2"	3/4" Roller	800	W-MHD5DPB
5"	2"	3/4" Roller	800	W-MHD5DPR
6"	2"	3/4" Roller	900	W-MHD6DPB
6"	2"	3/4" Roller	900	W-MHD6DPR
8"	2"	3/4" Roller	950	W-MHD8DPB
8"	2"	3/4" Roller	950	W-MHD8DPR

Available in red or burgundy tread.



W-DP40114BB3



W-MHD6DPR

Applications:

- Automotive equipment
- Display fixtures

Solid Polyurethane Wheels

Durability exceeds rubber, stands up to water and most chemicals, easy and smooth-rolling. Non-marking.

220–1000 lbs Capacity

Wheel Size	Tread Width	Bearing	Load Cap.	Part Number
3"	1-1/4"	3/8" Precision Ball	220	W-SP30114B38
3-1/2"	1-1/4"	3/8" Precision Ball	260	W-SP35114B38
4"	1-1/4"	3/8" Precision Ball	275	W-SP40114B38
4"	2"	3/4" Roller	800	W-MHD4SP
5"	1-1/4"	5/16" Precision Ball	300	W-SP50114B38
5"	2"	3/4" Roller	750	W-MHD5SP
6"	2"	3/4" Roller	850	W-MHD6SP
8"	2"	3/4" Roller	1000	W-MHD8SP



W-SP40114B38

Applications:

- Display fixtures
- Institutional equipment
- Light-Medium Duty applications

Polyurethane Cast Iron Wheels



800–3200 lbs Capacity

Non-marking polyurethane tread is chemically bonded to a strong cast iron core. Floor protective, resists oil, grease, water and most chemicals. Zerk fitting for bearing lubrication. Shore A Durometer 90-95.



W-MHD5PU



W-MHD6PUC



W-SHD830PU

Wheel Size	Tread Width	Bearing	Load Cap.	Part Number
4"	2"	3/4" Roller	800	W-MHD4PU
5"	2"	3/4" Roller	1100	W-MHD5PU
6"	2"	3/4" Roller	1200	W-MHD6PU
6"	2"	1/2" Precision	1200	W-MHD6PUC
6"	2-1/2"	1" Roller	1600	W-SHD625PU
6"	3"	1" Roller	2000	W-SHD630PU
8"	2"	3/4" Roller	1400	W-MHD8PU
8"	2"	1/2" Precision	1400	W-MHD8PUC
8"	2-1/2"	1" Roller	2000	W-SHD825PU
8"	3"	1" Roller	2500	W-SHD830PU
10"	2-1/2"	1" Roller	2200	W-SHD1025PU
10"	3"	1" Roller	3000	W-SHD1030PU
12"	2-1/2"	1" Roller	2500	W-SHD1225PU
12"	3"	1" Roller	3200	W-SHD1230PU

Applications:

- Drop Forged casters
- Medium Heavy Duty casters
- Heavy Duty casters
- Heavy equipment

Injection molded polyolefin [H.D. plastic] withstands high impacts, is non-marking, impervious to water and unaffected by most chemicals.

175–900 lbs Capacity

Wheel Size	Tread Width	Bearing	Load Cap.	Part Number
3"	1"	5/16" Plain	175	W-LDP30100P56
3"	1-1/4"	3/8" Plain	300	W-LDP30114P3
4"	1"	5/16" Plain	200	W-LDP40100P56
4"	1-1/4"	3/8" Plain	225	W-LDP40114P3
4"	2"	3/4" Roller	600	W-MHD4HDP
5"	1"	5/16" Plain	225	W-LDP50100P56
5"	1-1/4"	3/8" Plain	230	W-LDP50114P3
5"	2"	3/4" Roller	650	W-MHD5HDP
6"	2"	3/4" Roller	750	W-MHD6HDP
8"	2"	3/4" Roller	900	W-MHD8HDP



W-LDP30114P3



W-LDP50114P3



W-MHD6HDP

Applications:

- FoodService equipment
- Institutional & industrial carts
- Heavy equipment

400–3500 lbs Capacity

Designed for a high load rating. Resistant to grease, oil and most chemicals. Provides superior floor protection and non-marking.

W-PHN Series



W-LM4PN



W-PHN60212B7

Applications:

- Bakery equipment
- Automotive equipment
- Heavy equipment

Wheel Size	Tread Width	Bearing	Load Cap.	Part Number
4"	1-1/4"	1/2" Plain with 3/8" Bushing	400	W-LM4PN
4"	2"	3/4" Roller	800	W-MHD4PN
5"	2"	3/4" Roller	1100	W-MHD5PN
6"	2"	3/4" Roller	1200	W-MHD6PN
6"	2-1/2"	1" Roller	1600	W-PHN60212B7
6"	3"	1" Roller	2000	W-PHN60300B7
8"	2"	3/4" Roller	1400	W-MHD8PN
8"	2-1/2"	1" Roller	2000	W-PHN80212B7
8"	3"	1" Roller	2500	W-PHN80300B7
10"	2-1/2"	1" Roller	2500	W-PHN10212B7
10"	3"	1" Roller	2900	W-PHN10300B7
12"	2-1/2"	1" Roller	3000	W-PHN12212B7
12"	3"	1" Roller	3500	W-PHN12300B7

Hi-Temp Wheels

600-700 lbs Capacity

For environments with temperatures from 400 - 525 degrees Fahrenheit. Floor protective, non-marking, and tough.



W-PHT415R4



W-RET62

Applications:

- Bakery
- Ovens
- Food service equipment

Wheel Size	Tread Width	Bearing	Load Cap.	Wheel Description	Part Number
4"	1-1/2"	1/2" Roller	600	Phenolic	W-PHT415R4
4"	1-3/8"	3/8" Precision Ball	600	Epoxy	W-EP415B3
6"	2"	3/4" Plain	700	Retort	W-RET62

High load capacities and tough composite iron materials with strength and durability. A blend of cast iron and steel. Temperature rating -40° to +500°

700–1400 lbs Capacity

Wheel Size	Tread Width	Bearing	Load Capacity	Part Number
4"	2"	3/4" Roller	700	W-MHD4SS
5"	2"	3/4" Roller	1100	W-MHD5SS
6"	2"	3/4" Roller	1200	W-MHD6SS
8"	2"	3/4" Roller	1400	W-MHD8SS



W-MHD4SS



W-MHD6SS

Applications:

- Heavy industrial equipment
- Factory workstations
- Automotive equipment

Pipe Wheels

Cast iron construction for heavy loads. Roller bearings for easy rolling. Excellent durability.

Up to 600 lbs Capacity

Wheel Size	Tread Width	Wheel ID	Bearing	Load Capacity	Part Number
5"	2-1/4"	1-13/16"	3/4" Roller	600	W-MP50158



W-MP50158

Applications:

- Gates
- Fences

400–1200 lbs Capacity

Cast iron construction for heavy loads. Use on standard size angle iron track.

W-VG Series



W-VG415B



W-VG415S



W-VG620B

Wheel Size	Tread Width	Bearing	Load Cap.	Part Number
3"	1-5/8"	3/4" Precision Ball	400	W-VG3158S
4"	1-1/2"	3/4" Roller	600	W-VG415B
4"	1-1/2"	3/4" Precision Ball	600	W-VG415S
6"	2"	3/4" Roller	1200	W-VG620B
6"	2"	3/4" Precision Ball	1200	W-VG620S

Gate Accessories



W-VGBOX



W-ROL6B



W-ROL3

Applications:

- Gates
- Fences
- Angle Iron Track

Accessories	Part Number
Metal Box for 3" x 1-5/8" V-Groove Wheel	W-VGBOX3158
Metal Box for 4" x 1-1/2" V-Groove Wheel	W-VGBOX
Metal Box for 6" x 2" V-Groove Wheel	W-VGBOX620
3" Rubber Roller Welded	W-ROL3
3" Rubber Roller with Axle & Nut	W-ROL3B
6" Rubber Roller Welded	W-ROL6
6" Rubber Roller with Axle & Nut	W-ROL6B
12" Rubber Roller Welded	W-ROL12
12" Rubber Roller with Axle & Nut	W-ROL12B

Air-filled pneumatic wheels provide excellent shock absorption. Cushioned ride for better load protection.

310–350 lbs Capacity

W-PN Series

Wheel Size	Tread Width	Bearing	Load Cap.	Tread Type	Part Number
8"	2-1/2"	5/8" Ball - Centered Hub	310	Ribbed	W-PN08250RC
8"	2-1/2"	5/8" Ball - Offset Hub	310	Ribbed	W-PN08250ROC
10"	3-1/2"	5/8" Ball - Offset Hub	350	Ribbed	W-PN10350ROC
16"	480/400-8	5/8" Ball - Centered Hub	350	4 Ply Knobby	W-PN16480K4C
16"	480/400-8	5/8" Ball - Centered Hub	350	2 Ply Ribbed	W-PN16480R2C



W-PN08250RC



W-PN16480R2C

- Applications:
- Platform carts
 - Handtrucks
 - Machinery

Wheelbarrow Tubes and Tire

Replacement inner tubes for wheelbarrow.
Requires air inflation.

Size	Description	Part Number
8"	280/250-4 Tube Only	W-TT08250
10"	410/350-4 Tube Only	W-TT103004
13"	400-6 Tube Only	W-TT134006
16"	480/400-8 Tube Only	W-TT164008



Replacement rubber wheelbarrow tire.

Size	Description	Part Number
480/400-8	16" Diameter Ribbed 4-Ply Tire	W-TR16480R4

250–480 lbs Capacity

Air-free **NeverFlat™** tires [polyurethane foam] act similar to a pneumatic wheel, but more durable. Excellent on rough flooring.



W-NF06200R



W-NF10350R-G



W-NF16480K-B



W-NF16480R-R

Applications:

- Platform carts
- Handtrucks
- Factory and warehouse carts
- Wheelbarrows

W-NF Series

Wheel Size	Tread Width	Wheel Color	Bearing	Load Cap.	Tread Type	Part Number
6"	2"	Black	1/2" Ball - Centered Hub	250	Ribbed	W-NF06200R
8"	2-1/2"	Black	1/2" Ball - Centered Hub	300	Ribbed	W-NF08250R
8"	2-1/2"	Black	5/8" Ball - Offset	300	Ribbed	W-NF08250RO
10"	3-1/2"	Red	5/8" Ball - Offset	350	Knobby	W-NF10350KOR
10"	3-1/2"	Gray	1/2" Ball - Centered Hub	350	Ribbed	W-NF10350R-G
16"	480/400-8	Black	5/8" Ball - Centered Hub	480	Knobby	W-NF16480K
16"	480/400-8	Blue	5/8" Ball - Centered Hub	480	Knobby	W-NF16480K-B
16"	480/400-8	Red	5/8" Ball - Centered Hub	480	Ribbed	W-NF16480R-R



Full color
packaging label
for retail

Rubber tread wheel with metal hub. Great for both indoor and outdoor uses.

120–375 lbs Capacity

W-MH Series

Wheel Size	Tread Width	Bearing	Load Cap.	Part Number
6"	1-1/2"	1/2" Ball - Centered Hub	120	W-MH06112B4W
6"	1-1/2"	5/8" Ball - Centered Hub	120	W-MH06112B5W
7"	1-1/2"	1/2" Ball - Centered Hub	120	W-MH07112B4W
8"	1-3/4"	1/2" Ball - Centered Hub	140	W-MH08134B4W
8"	1-3/4"	5/8" Ball - Centered Hub	140	W-MH08134B5W
8"	1-3/4"	3/4" Ball - Centered Hub	140	W-MH08134B6W
8"	2-1/2"	5/8" Ball - Centered Hub	160	W-MH08212B5
8"	2-1/2"	3/4" Ball - Centered Hub	160	W-MH08212B6
10"	1-3/4"	1/2" Ball - Centered Hub	185	W-MH10134B4-TAN
10"	1-3/4"	1/2" Ball - Centered Hub	185	W-MH10134B4W
10"	1-3/4"	5/8" Ball - Centered Hub	185	W-MH10134B5W
10"	2-1/2"	5/8" Ball - Centered Hub	375	W-MH10234B5
10"	2-1/2"	3/4" Ball - Centered Hub	375	W-MH10234B6
12"	1-3/4"	1/2" Ball - Centered Hub	200	W-MH12134B4W
12"	1-3/4"	5/8" Ball - Centered Hub	200	W-MH12134B5W



W-MH06112B4W



W-MH08212B5



W-MH10134B4-TAN



W-MH10212B5

- Applications:
- Handtrucks
 - Platform carts
 - Stock carts

Plastic Hub Wheels



45–75 lbs Capacity

Rubber tread wheel with white plastic hub. Excellent for outdoor uses. Quiet and easy operation.

W-PH Series



W-PH80134P4

Wheel Size	Tread Width	Bearing	Load Cap.	Part Number
5"	1"	3/8" Plain - Offset Hub	45	W-PH50100P3
5"	1"	1/2" Plain - Offset Hub	45	W-PH50100P4
6"	1-1/2"	1/2" Plain - Offset Hub	50	W-PH60112P4
7"	1-1/2"	1/2" Plain - Offset Hub	55	W-PH70112P4
8"	1-3/4"	1/2" Plain - Offset Hub	60	W-PH80134P4
10"	1-3/4"	1/2" Plain - Offset Hub	75	W-PH10134P4

Applications:

- Lawn mowers
- Garden carts
- Other portable equipment

Poly Hub Wheels

300–350 lbs Capacity

Solid rubber tread wheel with poly hub. Easy and smooth rolling.

W-PL Series



W-PL08225B5

Wheel Size	Tread Width	Bearing	Load Cap.	Part Number
8"	2-1/4"	5/8" Ball - Offset Hub	300	W-PL08225B5
8"	2-1/4"	3/4" Ball - Offset Hub	300	W-PL08225B6
10"	2-1/2"	5/8" Ball - Offset Hub	350	W-PL10212B5
10"	2-1/2"	3/4" Ball - Offset Hub	350	W-PL10212B6

Applications:

- Food service equipment
- Textile carts
- Hotel equipment
- Mobile trash carts
- Handtrucks

Brake kit includes lever, pedal, axle and nut.

Description	For	Part Number
3" Brake Kit for C-LI Series	Lt. Institutional Casters	BK-LI3
4" Brake Kit for C-LI Series	Lt. Institutional Casters	BK-LI4
5" Brake Kit for C-LI Series	Lt. Institutional Casters	BK-LI5
3" Brake Kit for C-LM Series	Lt. Medium Duty Casters	BK-LM3
3-1/2" Brake Kit for C-LM Series	Lt. Medium Duty Casters	BK-LM35
4" Brake Kit for C-LM Series	Lt. Medium Duty Casters	BK-LM4
5" Brake Kit for C-LM Series	Lt. Medium Duty Casters	BK-LM5
4" Brake Kit for C-MHD Series	Med. Heavy Duty Casters	BK-MHD4
5" Brake Kit for C-MHD Series	Med. Heavy Duty Casters	BK-MHD5
6" Brake Kit for C-MHD Series	Med. Heavy Duty Casters	BK-MHD6
8" Brake Kit for C-MHD Series	Med. Heavy Duty Casters	BK-MHD8



BK-MHD6

Floor Locks

Welded steel construction with non-slip rubber pad, foot-operated.

Size	Ext. Height	Retracted Height	Throw	Part Number
4"	5-5/8"	5-5/16"	9/16"	C-FL4
5"	6-1/2"	5-1/2"	1"	C-FL5
6"	7-1/2"	6-1/2"	1"	C-FL6
8"	9-1/2"	8-1/2"	1"	C-FL8



C-FL4

Mounting Specifications			
Plate Size	Hole Spacing	Attaching Bolt	Type
3-15/16" x 4-1/2"	2-5/8" x 3-5/8" to 3" x 3"	3/8"	Plate

Expanding Adapters



XA-1050

Part Number	Round Tubing ID	Expanding Range
XA-0875	7/8"	0.852 - 0.927
XA-1050	1-1/2"	1.426 - 1.589

Nuts and Bolts



NB-MHDZ

Description	For	Part Number
5/16" Nut and Bolt	Shopping Cart Caster	NB-LM516
3/8" Nut and Bolt	Light Medium Duty Casters	NB-LM38
3/8" Nut and Bolt with Zerk Fitting	Light Medium Duty Casters	NB-LM38Z
1/2" Nut and Bolt	Medium Heavy Duty Casters	NB-MHD
1/2" Nut and Bolt with Zerk Fitting	Medium Heavy Duty Casters	NB-MHDZ
1/2" Nut and Bolt with Zerk Fitting	Medium Heavy Duty Brake Casters	NB-MHDZ358

Metal Bushings



W-MB1258

Dimensions	Part Number
3/8" ID x 1/2" OD x 1-11/16" L	W-MB3812
1/2" ID x 5/8" OD x 1-15/16" L	W-MB1258
1/2" ID x 3/4" OD x 1-15/16" L	W-MB1234
1/2" ID x 3/4" OD x 2-7/16" L	BU-34
5/8" ID x 3/4" OD x 2-7/16" L	W-MB5834

Ball Bearings

Bearing ID	Bearing OD	Part Number
1/2"	1-1/8"	W-WB12118
1/2"	1-3/8"	W-WB12138
5/8"	1-3/8"	W-WB58138
3/4"	1-3/8"	W-WB34138

NOTE: Packaged 2 per box



W-WB34138

Delrin Bearings

Bearing ID	Bearing OD	Length	Part Number
1/2"	1-3/16"	0.69"	DB-50
3/4"	1-3/16"	0.69	DB-34

Note: Packed 2 per carton.



DB-50

Roller Bearings

Bearing ID	Bearing OD	Length	Part Number	Note
1/2"	1-3/16"	1-3/8"	RB-12	Includes outer race
3/4"	1-3/16"	1-7/8"	RB-34	Includes outer race



RB-34

Precision Ball Bearings

Bearing ID	Bearing OD	Length	Part Number
1/2"	1-1/8"	5/16"	PB-50118
1/2"	1-3/16"	Outer race: 1/2" Inner race: 1-1/4"	PB-501316

Note: Packed 2 per carton.



PB-501316, PB-50118



Y-DF8S



Y-KL6S



Y-MHD6S



Y-ML5P1S

Additional
Mounting
Options
Available

Description		Part Number
6" Drop Forged	Swivel, Plate	Y-DF6S
8" Drop Forged	Swivel, Plate	Y-DF8S
4" Kingpinless	Swivel, Plate	Y-KL4S
5" Kingpinless	Swivel, Plate	Y-KL5S
6" Kingpinless	Swivel, Plate	Y-KL6S
8" Kingpinless	Swivel, Plate	Y-KL8S
3" Light Medium Duty	Rigid, Plate	Y-LM3P1R
3" Light Medium Duty	Swivel, Plate	Y-LM3P1S
3-1/2" Light Medium Duty	Rigid, Plate	Y-LM35P1R
3-1/2" Light Medium Duty	Swivel, Plate	Y-LM35P1S
4" Light Medium Duty	Rigid, Plate	Y-LM4P1R
4" Light Medium Duty	Swivel, Plate	Y-LM4P1S
5" Light Medium Duty	Rigid, Plate	Y-LM5P1R
5" Light Medium Duty	Swivel, Plate	Y-LM5P1S
4" Medium Heavy Duty	Rigid, Plate	Y-MHD4R
4" Medium Heavy Duty	Rigid, P2 Plate	Y-MHD4R-P2
4" Medium Heavy Duty	Swivel, Plate	Y-MHD4S
4" Medium Heavy Duty	Swivel, P2 Plate	Y-MHD4S-P2
5" Medium Heavy Duty	Rigid, Plate	Y-MHD5R
5" Medium Heavy Duty	Swivel, P2 Plate	Y-MHD5R-P2
5" Medium Heavy Duty	Swivel, Plate	Y-MHD5S
5" Medium Heavy Duty	Swivel, P2 Plate	Y-MHD5S-P2
6" Medium Heavy Duty	Rigid, Plate	Y-MHD6R
6" Medium Heavy Duty	Rigid, P2 Plate	Y-MHD6R-P2
6" Medium Heavy Duty	Swivel, Plate	Y-MHD6S
6" Medium Heavy Duty	Swivel, P2 Plate	Y-MHD6S-P2
8" Medium Heavy Duty	Rigid, Plate	Y-MHD8R
8" Medium Heavy Duty	Rigid, P2 Plate	Y-MHD8R-P2
8" Medium Heavy Duty	Swivel, Plate	Y-MHD8S
8" Medium Heavy Duty	Swivel, P2 Plate	Y-MHD8S-P2
3" Total Locking	Swivel, Plate	Y-ML3P1S
3-1/2" Total Locking	Swivel, Plate	Y-ML35P1S
4" Total Locking	Swivel, Plate	Y-ML4P1S
5" Total Locking	Swivel, Plate	Y-ML5P1S
5" Shopping Cart	Swivel, Threaded Stem	Y-SC5T1
6" Waste Component	Swivel, Plate	YZ-MHD6S
6" Waste Component	Rigid, Plate	YZ-MHD6R

Description	Part Number
3/8" Diameter x 18" Length Axle	W-WA38018
3/8" Diameter x 24" Length Axle	W-WA38024
1/2" Diameter x 9-3/4" Length Axle	W-WA12009
1/2" Diameter x 18" Length Axle	W-WA12018
1/2" Diameter x 24" Length Axle	W-WA12024
5/8" Diameter x 9-3/4" Length Axle	W-WA58009
5/8" Diameter x 18" Length Axle	W-WA58018
5/8" Diameter x 24" Length Axle	W-WA58024
5/8" Diameter x 36" Length Axle	W-WA58036
3/4" Diameter x 18" Length Axle	W-WA34018
3/4" Diameter x 24" Length Axle	W-WA34024
3/4" Diameter x 36" Length Axle	W-WA34036



W-WA58009

Axle Caps

Description	Part Number
3/8" Diameter Axle Cap	W-WC038
1/2" Diameter Axle Cap	W-WC012
5/8" Diameter Axle Cap	W-WC058
3/4" Diameter Axle Cap	W-WC034
NOTE: Packaged 2 Per Box	



W-WC058

DIY [Do-It-Yourself] -Truck



Part Number: HT-EC
Plate Size: 14" x 6"
Load Capacity: 180 lbs.
Wheels: 8" Plastic Hub Wheel
Description: Light Duty Economy Handtruck



W-PH80134P4

Utility Truck



Part Number: HT-ST
Plate Size: 14" x 7-1/2"
Load Capacity: 440 lbs.
Wheels: 10" Pneumatic Tire
Description: "P" Handle
Also available with **NeverFlat™** wheels



W-PN10350ROC

Heavy Duty



Part Number: HT-PHD
Plate Size: 18" x 7-1/4"
Load Capacity: 660 lbs.
Wheels: 10" Solid Tire with Poly Hub
Description: "P" Handle



W-PL10212B5

Convertible



C-LM4T3RS



W-PL10212B5

Part Number: HT-CV

Plate Size: 14" x 7-1/4"

Load Capacity: 550 lbs.

Wheels: 10" Solid Tire with Poly Hub

Description: Convertible Handtruck



Appliance

Part Number: HT-AP

Plate Size: 24" x 4-1/2"

Load Capacity: 440 lbs.

Wheels: 8" Solid Tire with Metal Hub

Description: With Racket Assembly and
Nylon Cargo Belt



Master Mover™ Transforming Carts



Part Number: MM-150

Size: 28-3/4" L x 19-5/16" W x 33" H

Load Capacity: 330 lbs.

Wheels: 4" Polyurethane Casters

Description: Fold down handle for easy storage.
Optional shelves make a two or three layer cart.



C-MM150S [Swivel]



C-MM150R [Rigid]

Applications:

- Restaurants
- Hotels
- Automotive & Electrical equipment



Part Number: MM-300

Size: 35-3/4" L x 23-5/8" W x 34-1/32" H

Load Capacity: 660 lbs.

Wheels: 5" Polyurethane Casters

Description: Fold down handle for easy storage.
Optional wire cage transforms cart into a mobile crate.



C-MM300S [Swivel]



C-MM300R [Rigid]

Applications:

- Restaurants
- Hotels
- Automotive & Electrical equipment
- Warehouse picking cart



Econo Pad

Part Number: FP-7280ECP
Finished Size: 72" x 80"
Weight: 3.5 lbs.
Color: Blue
Description: Economy pad
 Polyester filler with Zig Zag stitching
 Woven edge for added strength
 12 pcs per bundle



Heavy Duty Pad

Part Number: FP-7280HDP
Finished Size: 72" x 80"
Weight: 5 lbs.
Color: Blue
Description: Heavy Duty pad
 Polyester filler with Zig Zag stitching
 Woven edge for added strength
 12 pcs per bundle



Pro Pad

Part Number: FP-7280PRO
Finished Size: 72" x 80"
Weight: 6.75 lbs.
Color: Blue
Description: Premium [Professional] pad
 Polyester filler with Zig Zag stitching
 Woven edge for added strength
 12 pcs per bundle



Solid Planter Dolly



Part Number: DL-1010TW

Size: 12" x 12"

Load Capacity: 100 lbs.

Wheels: 1-1/2" Twin Wheel Casters

Slotted Planter Dolly



Part Number: DL-1212TW

Size: 12" x 12"

Load Capacity: 100 lbs.

Wheels: 1-1/2" Twin Wheel Casters

Home Use Dolly



Part Number: DL-173412

Size: 17-3/4" x 12"

Load Capacity: 250 lbs.

Wheels: 3" Rubber Casters

Pro-Mover



C-LM4P1TPS

Part Number: DL-41931MS
Size: 19" x 31"
Load Capacity: 1000 lbs.
Wheels: 4" Non-Marking TPR Casters
Description: Wider frame for heavy duty needs.
 Ball bearing wheels for smooth rolling.



Piano Dolly



C-LM4P1PUS

Part Number: DL-41830BPUS
Size: 18" x 30"
Load Capacity: 700 lbs.
Wheels: 4" Polyurethane Casters
Other wheel types: —RS [Rubber]
 —MS [Gray Rubber]



Solid Wood Platform Dolly



C-LM4P1RS

Part Number: DL-42317HRS
Size: 23-5/8" x 17-3/4"
Load Capacity: 700 lbs.
Wheels: 4" Rubber Casters
Description: Handles on two sides.
Other wheel types: —PUS [Polyurethane]
 —MS [Gray Rubber]



Mini Mover



Part Number: DL-31218
Size: 12" x 18"
Load Capacity: 600 lbs.
Wheels: 3" Rubber Casters



C-GD30HRS

DIY [Do-It-Yourself]



Part Number: DL-31624RS
Size: 16" x 24"
Load Capacity: 600 lbs.
Wheels: 3" Rubber Casters
Other wheel types: —PS [Polyolefin]
—MS [Gray Rubber]



C-GD30HRS

Semi-Pro



Part Number: DL-31830RS
Size: 18" x 30"
Load Capacity: 700 lbs.
Wheels: 3" Rubber Casters
Other wheel types: —PS [Polyolefin]
—MS [Gray Rubber]



C-GD30HRS

Round Stackable



Stackable

Available option with:

Semi-Pro



W-TP40114B3

Part Number: DL-2424PS

Size: 24" x 24"

Load Capacity: 660 lbs.

Wheels: 3" Heavy Duty Plastic Casters

Description: Round, Stackable.
Carpet Covered Ends.



Also available with:
4" Casters

DIY



W-LDP40114P3

Semi-Pro



W-TP40114B3

Professional



W-SP40114B38

Part Number: DL-IL1623


Size: 16" x 23"

Load Capacity: 330 lbs.

Wheels: 3" Gray Non-Marking TPR Casters

Description: Blue Polyolefin Platform for
Extra Protection, Stackable,
and Interlocking

Connect-A-Cart™ Interlocking Dolly

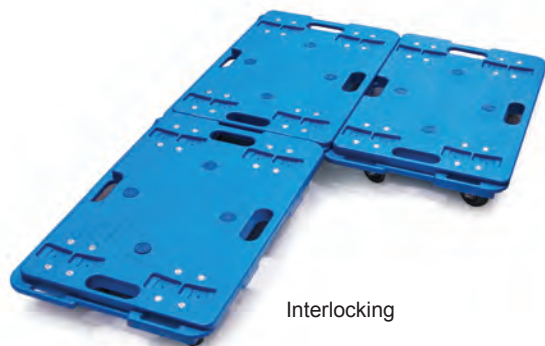

Interlocking



Heavy Duty Truss Suupport



Stackable

450–750 lbs Capacity

Unplated yoke prevents caustic zinc fumes when welding casters onto bins. Nut and bolt kingpin, 5/16" thick top plate, double welded 5/16" thick legs, roller bearings and cross-drilled hardened spanner bushing in wheel, zerk fittings in both wheel axle and the double ball bearing swivel raceway.



CZ-MHD6MRS

Wheel Size	Tread Width	Wheel Description	Load Cap.	Swivel Radius	Overall Height	Part Number
6"	2"	Heavy Plastic Polyolefin •	750	RIGID	7-1/2"	CZ-MHD6HDPR
6"	2"	Heavy Plastic Polyolefin •	750	4-9/16"	7-1/2"	CZ-MHD6HDPS
6"	2"	Moldon Rubber	450	RIGID	7-1/2"	CZ-MHD6MRR
6"	2"	Moldon Rubber	450	4-9/16"	7-1/2"	CZ-MHD6MRS
6"	2"	Phenolic •	1000	RIGID	7-1/2"	CZ-MHD6PNR
6"	2"	Phenolic •	1000	4-9/16"	7-1/2"	CZ-MHD6PNS

• Non-Marking Wheels

Applications:

- Waste bins
- Trash containers

Mounting Specifications		
Plate Size	Hole Spacing	Attaching Bolt
3-15/16" x 4-1/2"	2-5/8" x 3-5/8" to 3"x 3"	3/8"

Waste Components

Ground Rollers



W-GR808



W-GR808PU

Wheel Size	Tread Width	Axle Length	Wheel Description	Part Number
8.75"	6.25"	8.5"	Steel	W-GR806
8.75"	6.25"	8.5"	Steel	W-GR806R with mounting
8.75"	8.25"	10.5"	Steel	W-GR808
8.75"	8.25"	10.5"	Steel	W-GR808R with mounting
8.75"	8.25"	10.5"	Steel	W-GR808PU with Poly coating
8.75"	10.25"	12.5"	Steel	W-GR810
8.75"	10.25"	12.5"	Steel	W-GR810R with mounting
10.75"	8.25"	10.5"	Steel	W-GR108

Replacement Axles for Ground Rollers

Dimensions	Part Number
1-1/2" x 8-1/2" Zerk Axle	W-WA112085
1-1/2" x 10-1/2" Zerk Axle	W-WA112105
1-1/2" x 12-1/2" Zerk Axle	W-WA112125



W-WA112085


Nose Rollers

Wheel Size	Tread Width	Axle Length	Wheel Description	Part Number
4"	4"	6.25"	Cast Iron	W-NR44
4"	6"	8.5"	Cast Iron	W-NR46

Description	Dimensions	Part Number
Nose Cone for roll-off container	10" x 7" x 1-1/2"	Z-NC710



W-NR46



Z-NC710

Hinge Rod

Description	Part Number
0.5" x 65" Zinc Plated Rod with Threaded Ends and Nuts	Z-HR0565
0.5" x 75" Zinc Plated Rod with Threaded Ends and Nuts	Z-HR0575



Z-HR0575

Lid Ear Plate


Description	Part Number
3/16" Lid Ear Plate	Z-LE316



Z-LE316

Corner Plates

Description	Part Number
1-5/8" x 13" x 7-3/8" Corner Plate	Z-CP1014
3/4" x 14" x 7-1/8"	Z-CP1114



Z-CP1014

Heavy Duty Door Hinge

Description	Part Number
4" x 4" and 8" x 8-3/4" Heavy Duty Door Hinge for Container	Z-H4488



Z-H4488

Quick Change Caster Pad

Description	Part Number
4" x 4-1/2" Quick Change Caster Pad for C-MHD Series with Plate	C-MHDPAD



C-MHDPAD

Plastic Drain Plug



Z-DP150PF

Description	Part Number
3-1/2" diameter, 1-1/2" ID, 11/64" thickness	Z-DP150PF

Fork Channel



Z-FC4929

Description	Part Number
29-3/4" x 9-5/8" x 4-3/4" & 3/16" thickness	Z-FC4929

Gussett



Z-GU550

Description	Part Number
3-3/4" x 3-3/4" x 5-1/2" & 11/64" thickness	Z-GU550

Bumper



Z-BUM416

Description	Part Number
16" x 4-1/8" & 7/32" thickness	Z-BUM416

Hinge Lock Bar



Z-BAR

Description	Part Number
78" long x 1" diameter & 1/8" thickness	Z-BAR

Hinge Lock



Z-LOC

Description	Part Number
Fits most containers	Z-LOC
Set of two - left & right.	

Roller Bracket



Z-RB512

Description	Part Number
4-3/4" x 12-1/2" & 1/2" thickness	Z-RB512

Hook & Plate



Z-HP613

Description	Part Number
6" x 13" & 1" thickness	Z-HP613
[Fits axles of 4" x 4" and 4" x 6" Nose Rollers]	


DHC also offers customized caster and wheel display programs. We can help you design the best selling retail program for your store. In order to assist customers in finding their parts easily, each display set comes with a consumer-friendly header board and color-coded bin tags.





DHI CASTER DISPLAY SET

General Duty Casters, Light to Medium Heavy Duty Casters, Furniture Casters, Twin Wheel Casters, Wheel Bearings, Metal Bushings, Axle Caps, and more.

DH INTERNATIONAL 4" (34") CASTER PLANOGRAM



DH INTERNATIONAL 6" (34") CASTER PLANOGRAM

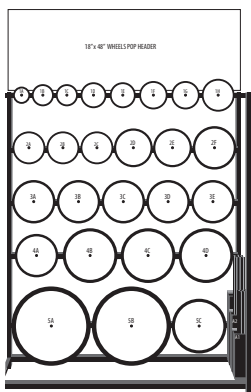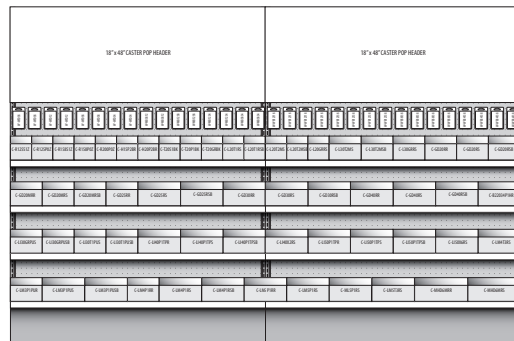

DHI WHEEL DISPLAY SET

Rubber Wheels, Metal Hub Wheels, Plastic Hub Wheels, Pneumatic Wheels, Wheelbarrow Tires, Inner Tubes, Axles, and more.



Payment Terms

For customers with established credit, terms are Net thirty [30] days from date of shipment. Application for credit is available with three trade references and bank references on a DHC Credit form. If credit is not established, please include payment with orders through Visa, MasterCard, or American Express. Cash will be accepted if provided the correct invoice amount.

Prices and Product Information

DHC reserves the right to change any and all existing prices without prior notice. Product information, data and description are for reference only and are subject to change without further notice.

Blanket Order Contracts and Special Orders

Blanket order contracts [BOC] are determined over the life of the agreement with the customer, created to specifically supply DHC customer with multiple shipping dates over negotiated terms set in the BOC. If you require long terms agreements please contact the Customer Sales and Service department for further explanations. Special orders without prior credit approval will require payment in advance, and are not refundable nor returnable.

Taxes

DHC is required by law to charge all applicable local and state taxes on items for which a sales tax exemption certificate has not been provided. Under state law, a copy of your tax exemption certificate must be on file in the DHC office.

Shipping and Transit of Products

All orders are shipped F.O.B Ontario, California, Approved prepaid orders are shipped by a preferred carrier group of DHC to any point within the United States of America. Drop shipments will carry additional surcharge which is determined at time of shipment. A product in transit travels at risk of purchaser. DHC is not liable for loss or damages in transit. If cartons and packages exhibit external damage, please note this to the carrier receipt at time of delivery and contact carrier for claim informational and instructions. Shipments should be verified immediately upon arrival at your facility. Within ten [10] days of receipt or tender of products and prior to changes being made to the original condition, buyer must inform DHC of defects of material or shortages. In any and all respects, failure to inform DHC, or use of the material shall be conclusive that DHC has satisfactorily performed its responsibilities.

Limited Liability

DHC limits its liability to the value of the defective material only. DHC assumes no liability for damage to person or property caused by merchandise bought from or through DHC. DHC shall not in any way be liable for special, indirect, incidents or consequential damages.

Returns

If you require returning any products purchased from DHC please contact our customer service during normal business hours. An RGA [Return Goods Authorization] number will be issued and should be written on the outside of your return package which should contain all documentation as well as the product being returned. All correspondence related to the returned product will require the following: Part Number, quantity, original purchase order number and explanation of the return. There is a 25% restocking charge for new and unused products returned to our facility in resalable condition.

Customer Service

Customer service is an essential component to our overall success. DHC perpetually strives to provide our customers with a combination of value added service coupled with a superior product at the most competitive price. Every member of the DHC team is empowered to maximize the customer experience on every transaction. DHC strives to be the best supplier in the industry, and we hope we meet and exceed your expectations.

DH Casters Standard Warranty

All DHC products are warranted for the period of one year from date of purchase. Any product that exhibits defects in material and or workmanship within the period of one year will be repaired or replaced at the discretion of DHC.

Nevertheless, the defective product must be acknowledged by DHC immediately. Once your claim has been approved by DHC we will issue you a claim form. When the form has been returned to DHC we will determine the next steps in resolving your claim. The process for warranty claims takes approximately two business days from receipt of claim.

Our warranty does not apply to abuse or misuse of our products, i.e. overloading, misapplication, accident, normal wear and tear, damage in transit or any unusual operating conditions [extreme temperatures], of which DHC was not consulted with prior to purchase. All DHC products are not intended for the transportation of humans or the use for any riding apparatus. DHC liability is limited to the factory cost based on the product purchased date.

DHC makes no other express or implied warranty with respect to the product other than the limited warranty set forth above. No DHC employees, sales agent, dealer or distributor is authorized to make modifications extensions or additions to the warranty above, unless it is enforceable by applicable law, DHC disclaims all implied warranties of merchantability, non infringement, and fitness for a particular purpose and the liability of DHC. If any damages related to any allegedly defective product shall under any tort, contract, or legal theory be limited to the actual price paid for such product and in no event include incidental, consequential, special indirect damages of any kind even if DHC is aware of the possibility of such damages. Some states do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply.



Credit Application

Business Credit Application

Ref No. _____

General Information

Last:	First:	Middle:	Title:
Name of Business:			Tax I.D.:
Address:			Phone:
City:	State:	ZIP:	Fax:

Company Information

Type of Business:	In Business Since:
Legal Form Under Which Business Operates: Corporation <input type="radio"/> Partnership <input type="radio"/> Proprietorship <input type="radio"/>	
If Division/Subsidiary, Name of Parent Company:	In Business Since:
Name of Company Principal Responsible for Business Transactions:	
Address:	City: State: ZIP: Phone:
Name of Company Principal Responsible for Business Transactions:	
Address:	Phone:
Has the company or any of it's principals filed for bankruptcy in the last then years? [Y / N]	
Has a civil judgment been obtained against the company or any of its principals in the last ten years? [Y / N]	

Bank References

Institution Name:	Checking Account #:
Address:	Phone:
Institution Name:	Checking Account #:
Address:	Phone:

Trade References

Company Name:	Contact Name:
Address:	Phone:
Account Opened Since:	Credit Limit: Fax:
Company Name:	Contact Name:
Address:	Phone:
Account Opened Since:	Credit Limit: Fax:
Company Name:	Contact Name:
Address:	Phone:
Account Opened Since:	Credit Limit: Fax:

I hereby certify that the information contained herein is complete and accurate. This information has been furnished with the understanding that it is to be used to determine the amount and conditions of the credit to be extended. Furthermore, I hereby authorize the financial institutions listed in this credit application to release necessary information to the company for which credit is being applied for in order to verify the information contained herein. I also agree to a 2% charge on all invoices over 30 days, and will pay all fees if action is taken for late payment. If legal action is necessary to collect sums due on this account, I agree to pay attorney fees or any collection costs and costs incurred in connection with such action; I further agree that the venue for such action be in San Bernardino, California, and that the laws of the State of California shall govern the rights, obligations and liabilities of the parties. I further agree that I shall be personally liable for payment of the sums due on account, even if the account is in the name of my/our company.

Sign, Title, & Date

FORM - CREAPP06



Casters

Wheels

Material Handling

Custom Solutions



[p] 800.543.3413

[f] 909.930.6448

[w] www.dhcasters.com

2260 South Haven Avenue, Suite C

Ontario, CA 91761