




Mini Hinges

SALICE

Mini hinges - Series 400




Compact, elegant, very strong mini hinge.
Bright nickel plated steel cup.
Bright nickel plated die-cast arm.
Dimensions of the \varnothing 26 mm cup.

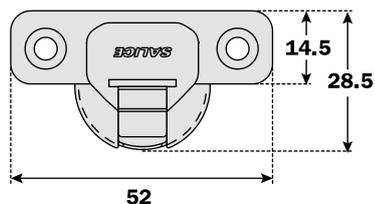

Constant "L" value of 0.7 mm (it does not change during side adjustment).

Approx. number of hinges required according to the door dimension and weight.

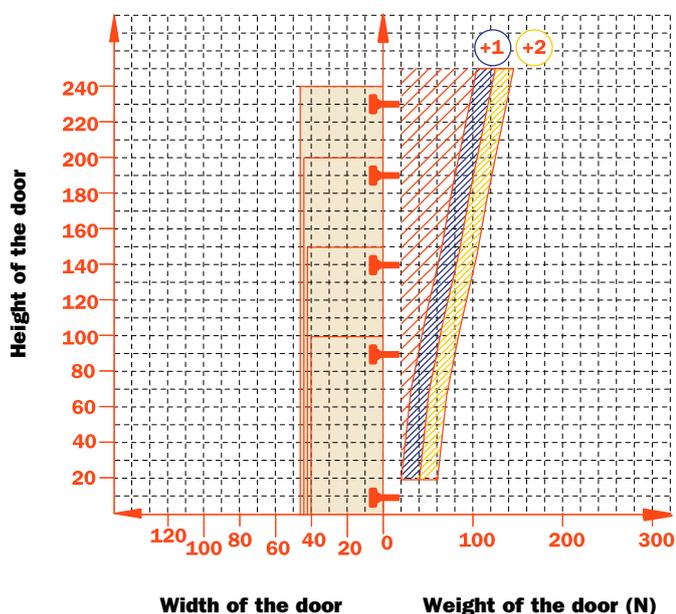





Adjustments

Compensated side adjustment from -0.5 mm to +5.5 mm.
 Height adjustment ± 2 mm.
 Depth adjustment with Series 200 mounting plates +2.8 mm.
 Depth adjustment with Domi mounting plates from -0.5 mm to +2.8 mm.

Mounting plates

Symmetrical and asymmetrical bright nickel plated steel or die-cast Series 200 mounting plates.
 Snap-on assembly on series Domi mounting plates.
 Positioning with pre-determined stop on traditional Series 200 mounting plates.


N.B. : Use POZIDRIVE No. 2 screwdrivers for all screws.

		
<p>Wood screw</p> 	<p>A</p>	
		
<p>Dowel</p> 	<p>B</p>	<p>R</p>

Use this table to identify the available drillings and fixings.
 Fill the third position of the hinge code number with the letter or the number corresponding to your choice. I.e.: C4_7A99.

↑
 Fill this position with the chosen letter or number.


Mini hinges - Series 400 - 94° opening

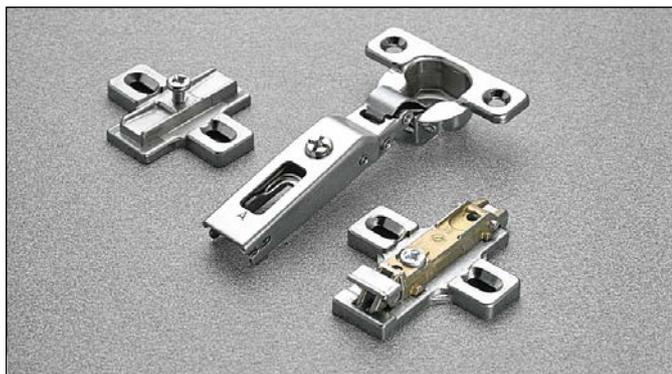


Technical information

11.5 mm deep metal cup.
 26 mm cup diameter.
 94° opening.
 Possible drilling distance on the door (K): from 3 to 8 mm.
 Compatible with all traditional Series 200 mounting plates and with all Domi snap-on mounting plates.

Space needed to open the door

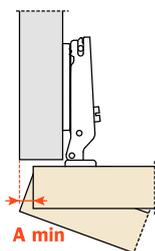

T=	16	17	18	19	20	21	22	23
K=3	A= 0.4	0.7	0.9	1.3	2.0	2.9	3.8	4.7
K=4	A= 0.4	0.6	0.9	1.1	1.6	2.4	3.3	4.2
K=5	A= 0.4	0.6	0.8	1.1	1.4	2.0	2.8	3.6
K=6	A= 0.4	0.6	0.8	1.0	1.2	1.8	2.4	3.2
K=7	A= 0.4	0.6	0.8	0.9	1.2	1.5	2.2	2.8
K=8	A= 0.4	0.6	0.8	0.9	1.2	1.5	1.9	2.6

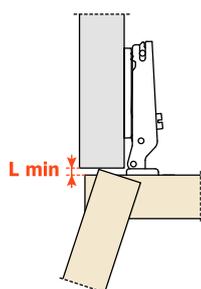


K=	3	4	5	6	7	8
L=	0.0	0.0	0.0	0.7	1.7	2.6

The above values are calculated on the assumption that the doors have square edges. They are reduced if the doors have radiussed edges.

Projection of the door


Projection of the door from the cabinet side at the max. opening. The figures are based on a straight arm hinge, H=0 mm thickness of mounting plate and K value = 3 mm.

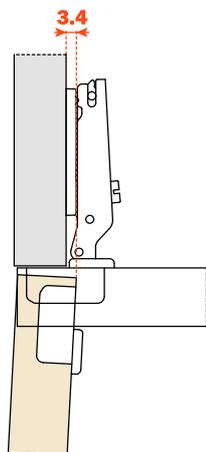

"C" value

With this formula you can obtain the max. thickness of the moulded door that can be opened without touching adjacent carcass sides, doors or walls, whilst bearing in mind the above L-K-T values.

$$C = 16.5 + K + A$$





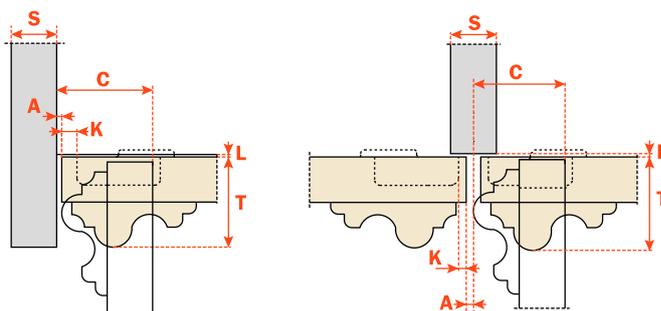


Packing

Boxes 300 pcs.
Pallets 7.200 pcs.

Use these formulas to determine the type of hinge arm, the drilling distance "K" and the height of the mounting plate "H" which is necessary to solve each application problem.

Use the tables "Drillings and fixings" at page 5 to complete the code number of the desired hinge.

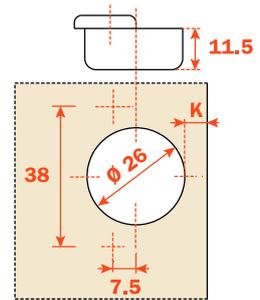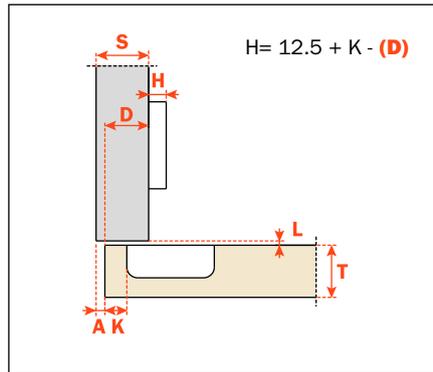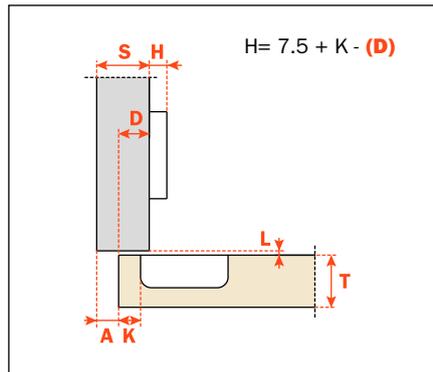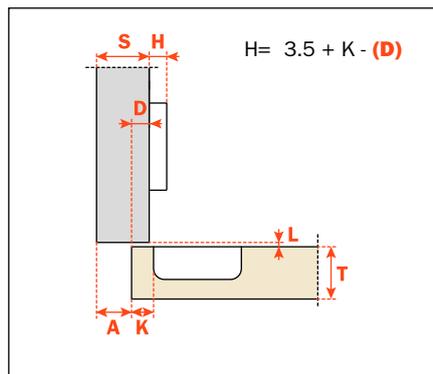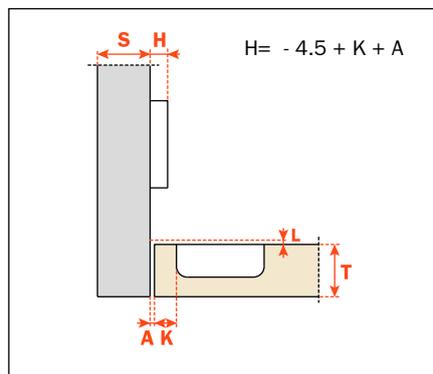**CA sprung hinge****Arm 0****CA - C4_7A99****Arm 5****CA - C4_7D99****Arm 9****CA - C4_7G99****Arm 17****CA - C4_7P99**



Technical information

Hinges for doors with positive angled assembly and crampon hinges.

11.5 mm deep metal cup.
 26 mm cup diameter.
 94° opening.
 Possible drilling distance on the door (K): from 3 to 8 mm.
 Compatible with all traditional Series 200 mounting plates and with all Domi snap-on mounting plates.


Packing

Boxes 150 pcs.
 Pallets 3.600 pcs.


CA sprung hinge

The solution of assembly problems where doors are mounted at a positive or negative angle requires the verification of drilling distances by a practical trial. Please do not hesitate to consult our technical support department for assistance.

Use the tables "Drillings and fixings" at page 5 to complete the code number of the desired hinge.

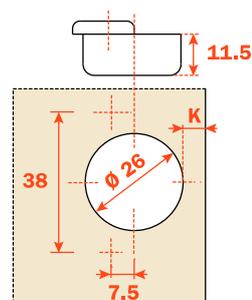


Arm 30°

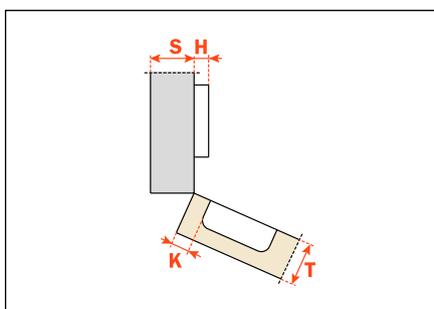


CA - C4_7E99

Arm 45°

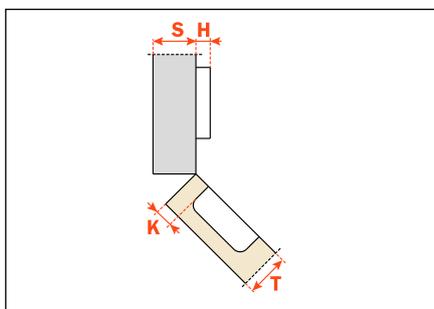

CA - C4_7M99




Crampon

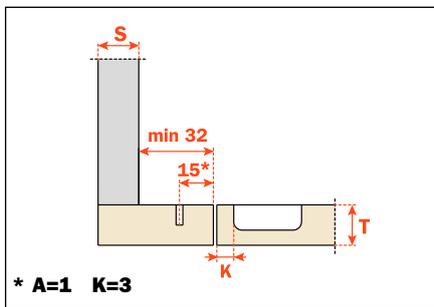

Crampon hinge to be used only with Series 200 mounting plates for traditional assembly and drilling 28x32mm.

CA - C4_7N99


Heights of mounting plates for every assembly.

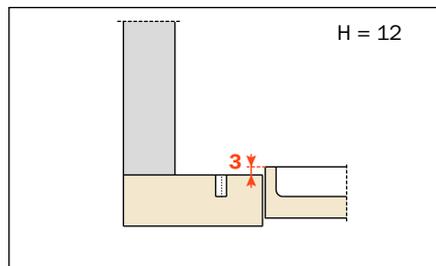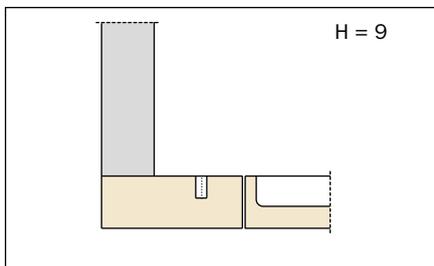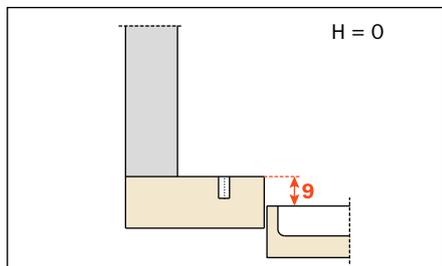

Mini hinges - Series 600




**Compact, elegant, very strong mini hinge.
Bright nickel plated steel cup and arm.
Dimensions of the ø 26 mm cup.**

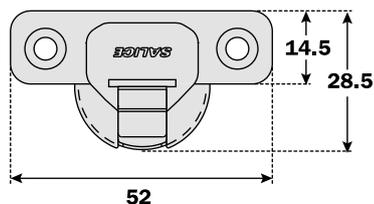

Constant "L" value of 0.7 mm (it does not change during side adjustment).

Approx. number of hinges required according to the door dimension and weight.

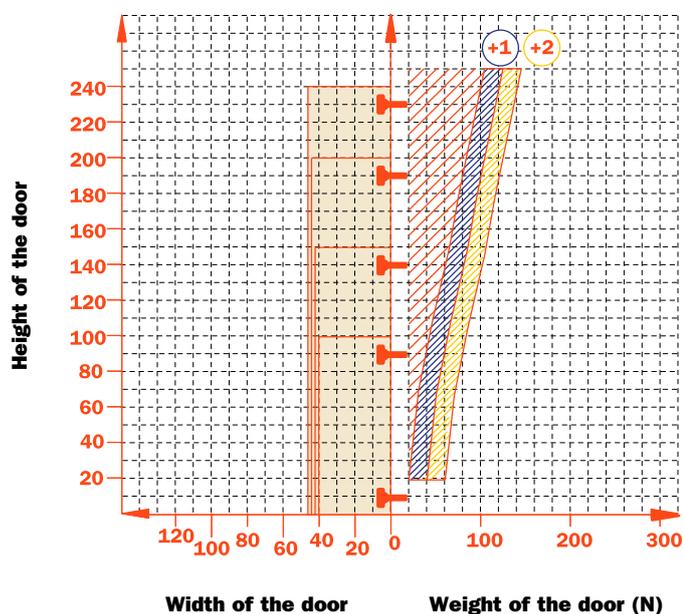

Adjustments

Side adjustment +5 mm. It is possible to recover the gap behind the door (the initial "L" value of 0.7 mm) simply by using the assembly stop located on the underside of the hinge.
Height adjustment ± 2 mm.
Depth adjustment with Series 200 mounting plates +2.5 mm.

Mounting plates

Symmetrical and asymmetrical bright nickel plated steel or die-cast Series 200 mounting plates.
Positioning with pre-determined stop on Series 200 traditional mounting plates.
NOT COMPATIBLE with Series 200 mounting plates with negative height.

N.B. : Use POZIDRIVE No. 2 screwdrivers for all screws.

Wood screw		A
		B
Dowel		R
		R

Use this table to identify the available drillings and fixings.

Fill the third position of the hinge code number with the letter or the number corresponding to your choice. I.e.: C6_7C99.

↑
Fill this position with the chosen letter or number.


Mini hinges - Series 600 - 94° opening




Technical information

11.5 mm deep metal cup.
 26 mm cup diameter.
 94° opening.
 Possible drilling distance on the door (K): from 3 to 8 mm.
 Compatible with all traditional Series 200 mounting plates.
NOT COMPATIBLE with Domi snap-on mounting plates.

Space needed to open the door

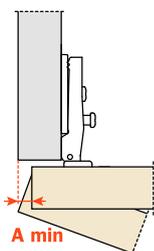

T=	16	17	18	19	20	21	22	23
K=3	A= 0.4	0.7	0.9	1.3	2.0	2.9	3.8	4.7
K=4	A= 0.4	0.6	0.9	1.1	1.6	2.4	3.3	4.2
K=5	A= 0.4	0.6	0.8	1.1	1.4	2.0	2.8	3.6
K=6	A= 0.4	0.6	0.8	1.0	1.2	1.8	2.4	3.2
K=7	A= 0.4	0.6	0.8	0.9	1.2	1.5	2.2	2.8
K=8	A= 0.4	0.6	0.8	0.9	1.2	1.5	1.9	2.6

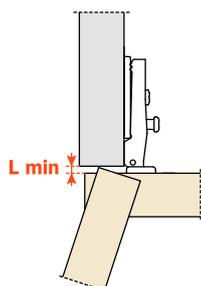


K=	3	4	5	6	7	8
L=	0.0	0.0	0.0	0.7	1.7	2.6

The above values are calculated on the assumption that the doors have square edges. They are reduced if the doors have radiussed edges.

Projection of the door



Projection of the door from the cabinet side at the max. opening. The figures are based on a straight arm hinge, H=0 mm thickness of mounting plate and K value = 3 mm.

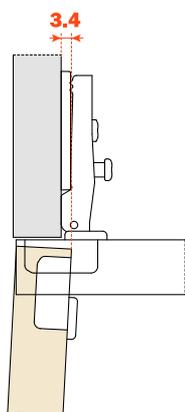

"C" value

With this formula you can obtain the max. thickness of the moulded door that can be opened without touching adjacent carcass sides, doors or walls, whilst bearing in mind the above L-K-T values.

$$C = 16.5 + K + A$$

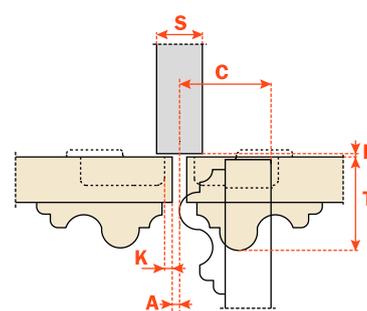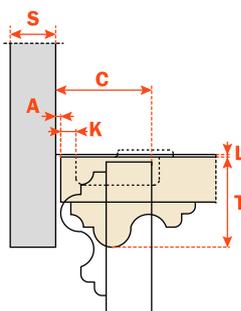

Packing





Boxes 600 pcs.

Pallets 14.400 pcs.

CA sprung hinge

Use these formulas to determine the type of hinge arm, the drilling distance "K" and the height of the mounting plate "H" which is necessary to solve each application problem.

Use the tables "Drillings and fixings" at page 11 to complete the code number of the desired hinge.

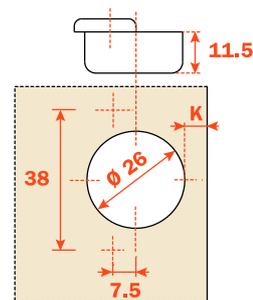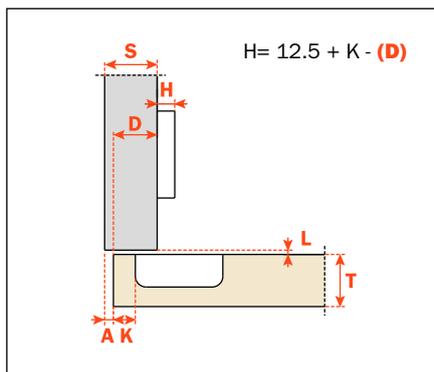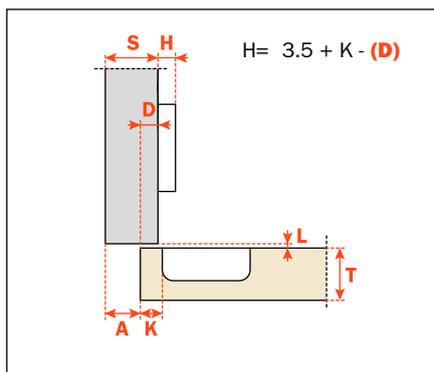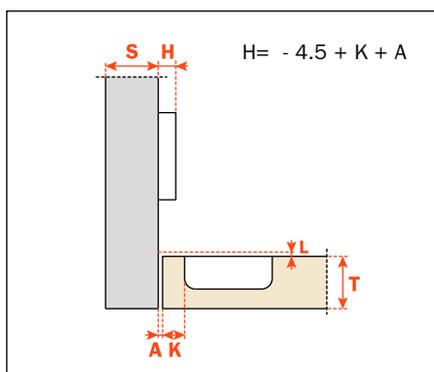**Arm 0****CA - C6_7C99****Arm 9****CA - C6_7L99****Arm 17****CA - C6_7S99**



Technical information

For wooden doors with positive angled assembly.
 11,5 mm deep metal cup.
 94° opening.
 Possible drilling distance on the door (K): from 3 to 8 mm.
 Compatible with all traditional Series 200 mounting plates.
NOT COMPATIBLE with Domi snap-on mounting plates.


Packing

Boxes 300 pcs.
 Pallets 7.200 pcs.


CA sprung hinge

The solution of assembly problems where doors are mounted at a positive or negative angle requires the verification of drilling distances by a practical trial. Please do not hesitate to consult our technical support department for assistance.

Use the tables "Drillings and fixings" at page 11 to complete the code number of the desired hinge.

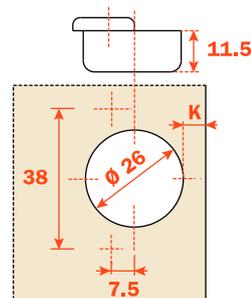


Arm 24°

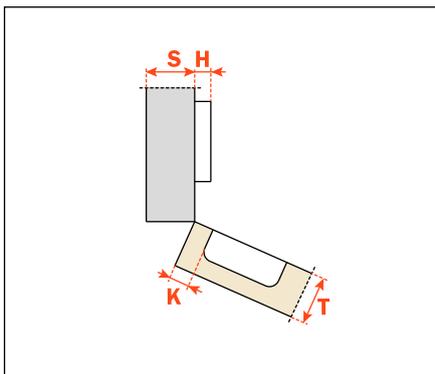


CA - C6_7U99

Arm 30°

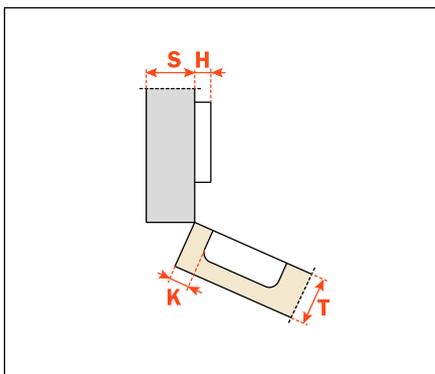


CA - C6_7E99

Arm 45°

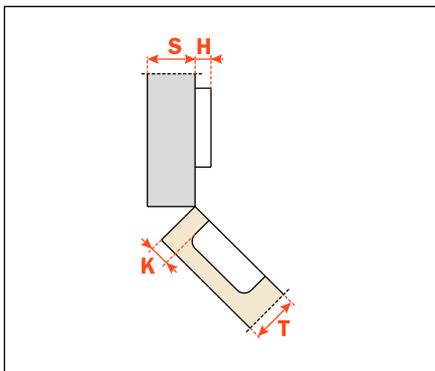

CA - C6_7M99

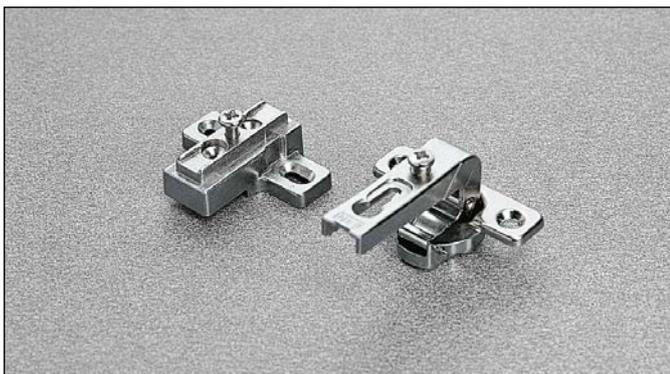

Technical information

Crampon hinges.

For smaller spaces with 15x32 mm drilling.

11.5 mm deep metal cup.

94° opening.

Possible drilling distance on the door (K): from 3 to 8 mm.

Compatible with all traditional Series 200 mounting plates, 28x32 mm drilling.

NOT COMPATIBLE with Domi snap-on mounting plates.



Packing

Boxes 300 pcs.

Pallets 7.200 pcs.




Use the tables "Drillings and fixings" at page 11 to complete the code number of the desired hinge.

CA sprung hinge

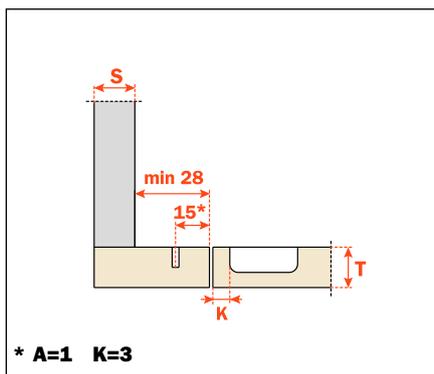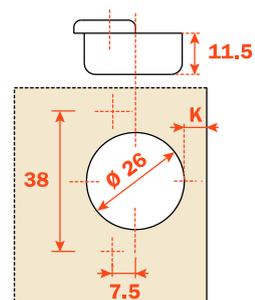

CA - C6_7N99

Heights of mounting plates for every assembly.

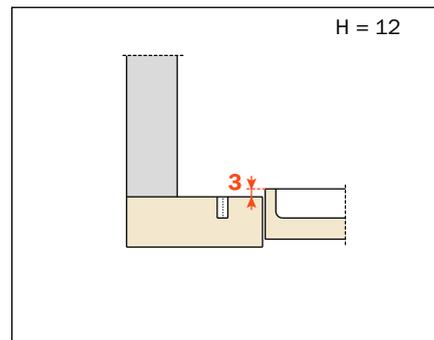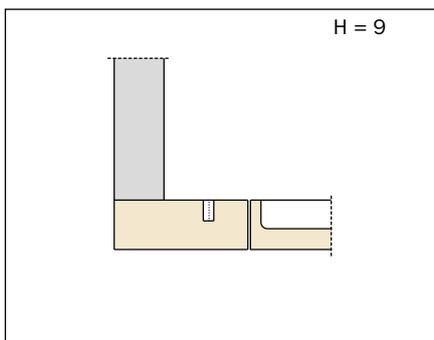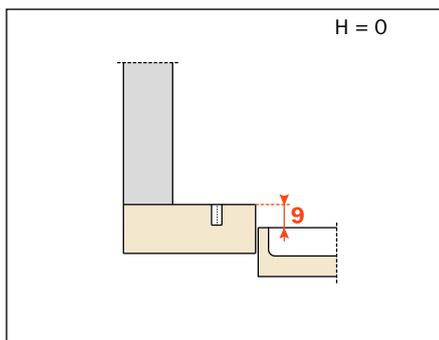

Mini hinges - Series 600 - 94° opening



Technical information

Hinges for glass doors.

Hole diameter 26 mm.

94° opening.

For use with glass from 4 mm to 6 mm thickness.

Possible drilling distance on the door (K): from 5.5 to 6.5 mm.

Compatible with all traditional Series 200 mounting plates.


NOT COMPATIBLE with Domi snap-on mounting plates.

Packing

Boxes 300 pcs.


Pallets 7.200 pcs.

Use these formulas to determine the type of hinge arm, the drilling distance "K" and the height of the mounting plate "H" which is necessary to solve each application problem.

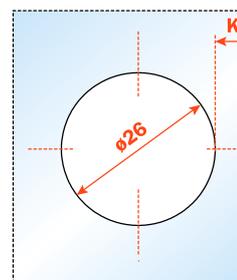


CA sprung hinge

Arm 0

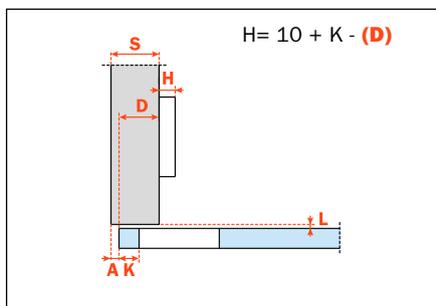


CA - C6C7C39

Arm 9

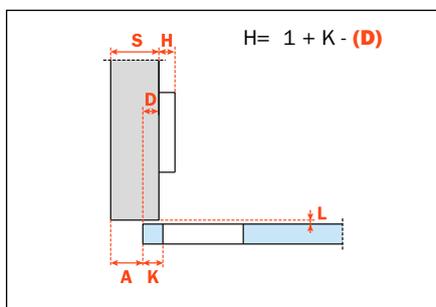

CA - C6C7L39

Arm 17

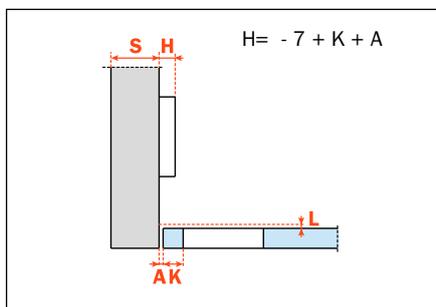

CA - C6C7S39



Technical information

Hinges for doors with positive angled assembly and crampon hinges.

Hole diameter 26 mm.

94° opening.

For use with glass from 4 mm to 6 mm thickness.

Possible drilling distance on the door (K): from 5.5 to 6.5 mm.

Compatible with all traditional Series 200 mounting plates.

NOT COMPATIBLE with Domi snap-on mounting plates.

Packing


Boxes 300 pcs.

Pallets 7.200 pcs.


The solution of assembly problems where doors are mounted at a positive or negative angle requires the verification of drilling distances by a practical trial. Please do not hesitate to consult our technical support department for assistance.

CA sprung hinge

Applications with doors set at any angle between -7.5° to +70° are possible by combining the appropriate hinge and mounting plate.

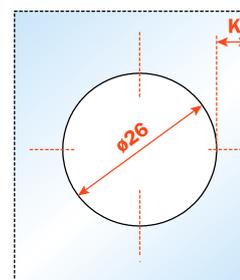


Arm 30°

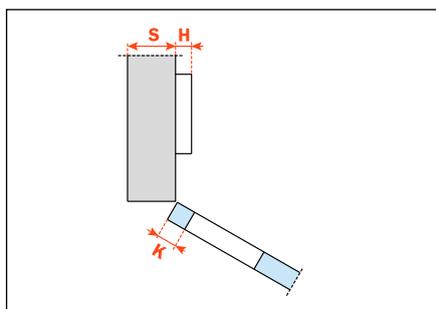


CA - C6C7E39

Arm 45°

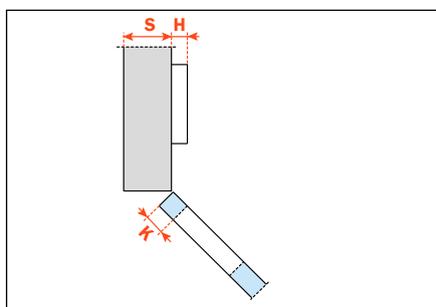

CA - C6C7M39




Crampon

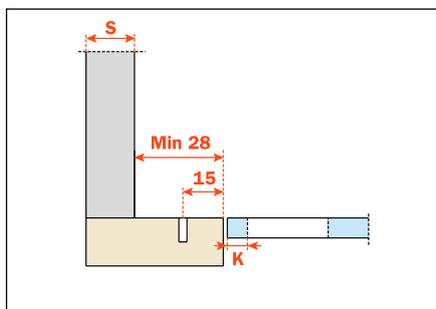

Crampon hinges. To be use only with Series 200 mounting plates for traditional assembly and drilling 28x32 mm.

CA - C6C7N39

Heights of mounting plates for every assembly.

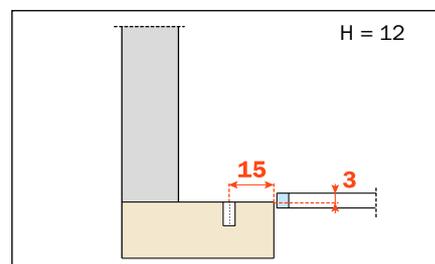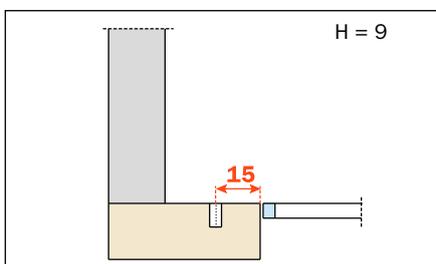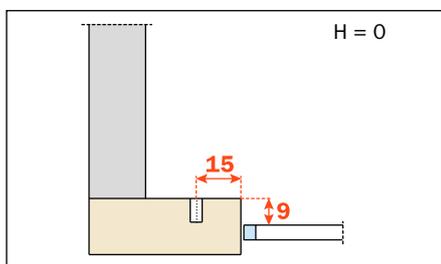

ARTURO SALICE S.p.A.

VIA PROVINCIALE NOVEDRATESE, 10
22060 NOVEDRATE (COMO) ITALIA
TEL. 031 790424
FAX 031 791508
info.salice@salice.com
www.salice.com

DEUTSCHE SALICE GMBH

RUDOLF DIESEL STR. 10
POSTFACH 1154
74382 NECKARWESTHEIM
TEL. 07233 9807-0
FAX. 07233 9807-16
info.salice@deutschesalice.de
www.deutschesalice.de

DEUTSCHE SALICE GMBH

VERKAUFSBÜRO NORD
RINGSTRASSE 36/A30 CENTER
32584 LÖHNE
TEL. 05731 15608-0
FAX. 05731 15608-10
vknord@deutschesalice.de
www.deutschesalice.de

SALICE FRANCE S.A.R.L.

ROUTE DE GOA ZAC LES 3 MOULINS
06600 ANTIBES
TEL. 0493 330069
FAX. 0493 330141
info.salice@salicefrance.com
www.salicefrance.com

SALICE ESPAÑA, S.L.U.

CALLE COPÉRNICO, 11
POLÍGONO INDUSTRIAL
COLL DE LA MANYA
08403 GRANOLLERS (BARCELONA)
TEL. 938 46 88 61
FAX 938 49 11 97
info.salice@saliceespana.es
www.saliceespana.es

SALICE UK LTD.

KINGFISHER WAY
HUNCHINGBROOKE BUSINESS PARK
HUNTINGDON CAMBS PE 29 6FN
TEL. 01480 413831
FAX. 01480 451489
info.salice@saliceuk.co.uk
www.saliceuk.co.uk

SALICE AMERICA INC.

2123 CROWN CENTRE DRIVE
CHARLOTTE NC. 28227
TEL. 704 8417810
FAX. 704 8417808
info.salice@saliceamerica.com
www.saliceamerica.com

SALICE CANADA INC.

3500 RIDGEWAY DRIVE,
UNIT#1
MISSISSAUGA, ONTARIO, L5L 0B4
TEL. 905 8208787
FAX. 905 8207226
info.salice@salicecanada.com
www.salicecanada.com

SALICE CHINA (SHANGHAI) CO. LTD.

1st FLOOR, B1 BLDG 928 MINGZHU ROAD
XUJING, QINGPU DISTRICT
SHANGHAI 201702 - CHINA
Tel. 021 3988 9880
Fax 021 3988 9882
info.salice@salicechina.com
www.salicechina.com