
DCN Cam Lock



DCN — Cam Lock Dimensions

	For Mat. Thickness	Straight Cam (X)	Inbent Cam (Y)	Outbent Cam (Z)	Cylinder Length (A)
DCN1	3/4"	1-1/16"	3/4"	1-3/8"	1"
DCN2	7/8"	1-3/16"	7/8"	1-1/2"	1-1/8"
DCN3	1-1/8"	1-7/16"	1-1/8"	1-3/4"	1-3/8"
DCN4	1-1/2"	1-13/16"	1-1/2"	2-1/8"	1-3/4"




See pages 2 - 3 for cam assembly instructions.


Included Accessories:


- 2 nickel plated keys
- 1 brass fixing nut
- 1 straight cam
- 1 offset reversible cam
- 1 anti-rotation plate
- 1 lost-motion cam shifter


Mounting Cutout



Included Cams





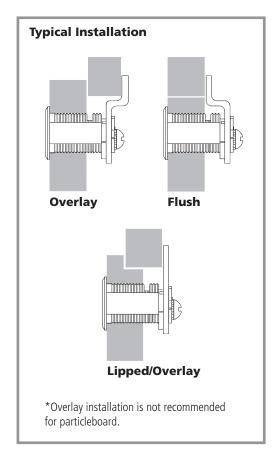


DCN — INSTALLATION INSTRUCTIONS (CAM ASSEMBLY)



All below configurations can be used with straight cam or offset cam (in either the inbent or outbent position).


Function:

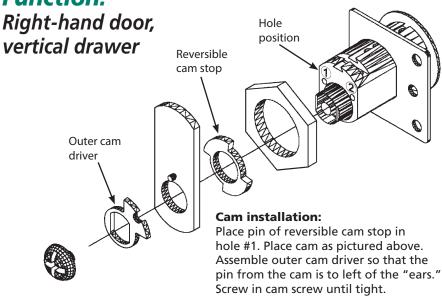



Rear view


DOOR



 360° key rotation, key removable at cam positions 9:00 and 12:00

DRAWER

Function:

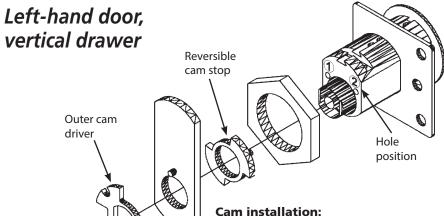


Place pin of reversible cam stop in hole #2. Place cam as pictured above. Assemble outer cam driver so that the pin from the cam is to right of the "ears." Screw in cam screw until tight.



Rear view

DOOR



360° key rotation, key removable at cam positions 12:00 and 3:00




DCN — INSTALLATION INSTRUCTIONS (CAM ASSEMBLY)



All below configurations can be used with straight cam or offset cam (in either the inbent or outbent position).


Function:

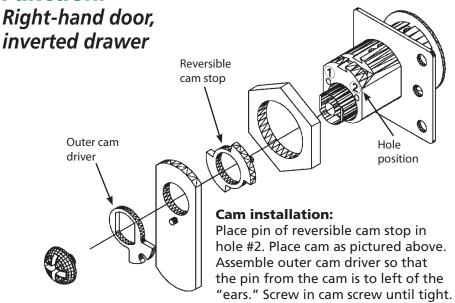



Rear view


DOOR



360° key rotation, key removable at cam positions 6:00 and 9:00

DRAWER


Function:

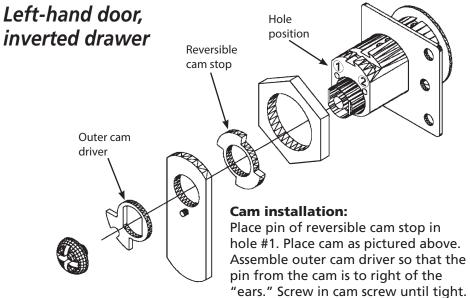




Rear view

DOOR



DRAWER



 360° key rotation, key removable at cam positions 3:00 and 6:00